



NEMA 5-15/20R to IEC C14 Power Cable - 14AWG

PW-1065C-xx - Specifications

Description

This power cord consists of a C14 male on one end and a 5-15/20R female on the other end. It is typically used as an adapter cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors Available	Black
Lengths Available	1ft / 3ft / 6ft
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	IEC 60320 C14
Connector B	NEMA 5-15/20R

Performance

Power Rating	15 Amp / 125 Volt
--------------	-------------------




Approvals / Environmental

C14	c(UL)us
5-15/20R	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------



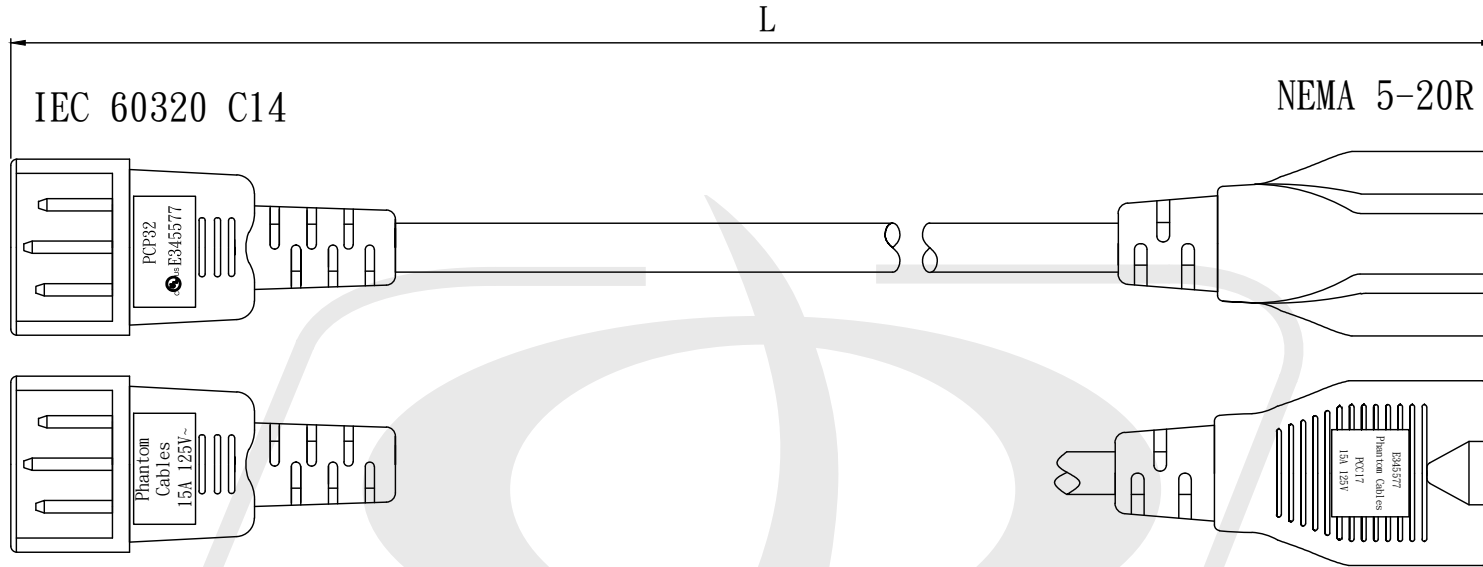

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm²) 105°C 300V VW-1

Tolerance


>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°

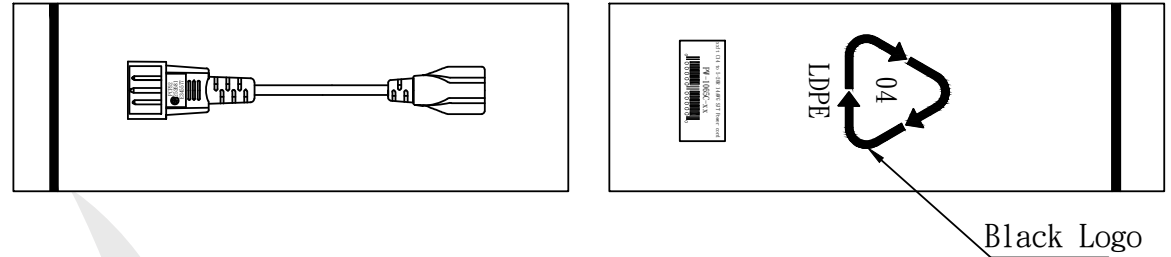

THE INDIVIDUALLY PACKED CORDS WILL BE PACKED IN BAGS OF 10 PIECES

P/N	LENGTH(Lmm)	UPC
PW-1065C-01	305mm	675678038657
PW-1065C-03	915mm	675678038664
PW-1065C-06	1830mm	675678038671

