

1ft NEMA 6-15/20R to IEC C14 Power Cable - 14AWG

PW-108C-01 - Specifications

Description

This power cord consists of a C14 male on one end and a 6-15/20R female on the other end. It is typically used as an extension cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color Black

Length 1 foot [0.3m]

Number of Conductors 3 Conductor

Wire Gauge 14 AWG

Jacket Heavy Duty SJT

Jacket Material 100% Virgin PVC - Polyvinyl Chloride

Jacket Fire Rating FT2, VW-1

Strain Relief Molded 100% Virgin PVC

Temperature Rating -20 deg C to 105 deg C

Connector(s)

Connector A IEC 60320 C14
Connector B NEMA 6-15/20R

<u>Performance</u>

Power Rating 15 Amp / 250 Volt

Approvals / Environmental

 $\begin{array}{ccc} \text{C14} & \text{c(UL)us} \\ \text{6-15/20R} & \text{c(UL)us} \\ \text{Cable} & \text{c(UL)us} \end{array}$

ISO ISO 9001:2015, ISO 14000

RoHS Yes
Reach Yes
Conflict Minerals Yes

Warranty Information


Warranty Limited Lifetime





1ft NEMA 6-15/20R to IEC C14 Power Cable - 14AWG

PW-108C-01 - Line Drawing

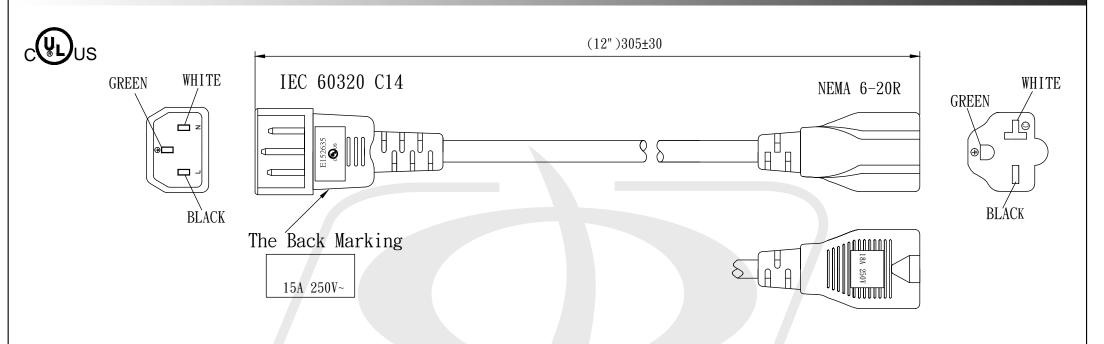

MARKING:

c(UL)us E241374 SJT 3/C 14AWG(2.08mm²) 105°C 300V VW-1

Tolerance

>0±0.30

>1. 0±0. 50

 $>10.0\pm1.0$


>20.0±2.0


Angle: ±1°



1ft NEMA 6-15/20R to IEC C14 Power Cable - 14AWG

PW-108C-01 - Packaging Information

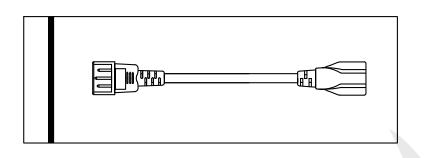

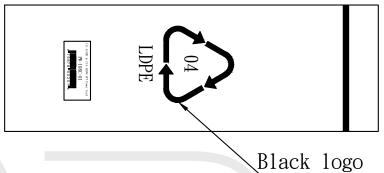

THE INDIVIDUALLY PACKED CORDS WILL BE PACKED IN BAGS OF 10 PIECES

