



# 1ft NEMA 5-15P to NEMA L5-20R Power Cable - 14AWG

PW-111C-01 - Specifications

## Description

This power cord consists of a 5-15P male on one end and a L5-20R female on the other end. It is typically used as an adapter cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

## Physical Characteristics

|                      |                                      |
|----------------------|--------------------------------------|
| Color                | Black                                |
| Length               | 1 foot [0.3m]                        |
| Number of Conductors | 3 Conductor                          |
| Wire Gauge           | 14 AWG                               |
| Jacket               | Heavy Duty SJT                       |
| Jacket Material      | 100% Virgin PVC - Polyvinyl Chloride |
| Jacket Fire Rating   | FT2, VW-1                            |
| Strain Relief        | Molded 100% Virgin PVC               |
| Temperature Rating   | -20 deg C to 105 deg C               |

## Connector(s)

|             |             |
|-------------|-------------|
| Connector A | C5-15P      |
| Connector B | NEMA L5-20R |

## Performance


|              |                   |
|--------------|-------------------|
| Power Rating | 15 Amp / 125 Volt |
|--------------|-------------------|



## Approvals / Environmental

|                   |                          |
|-------------------|--------------------------|
| C5-15P            | c(UL)us                  |
| L5-20R            | c(UL)us                  |
| Cable             | c(UL)us                  |
| ISO               | ISO 9001:2015, ISO 14000 |
| RoHS              | Yes                      |
| Reach             | Yes                      |
| Conflict Minerals | Yes                      |

## Warranty Information

|          |                  |
|----------|------------------|
| Warranty | Limited Lifetime |
|----------|------------------|

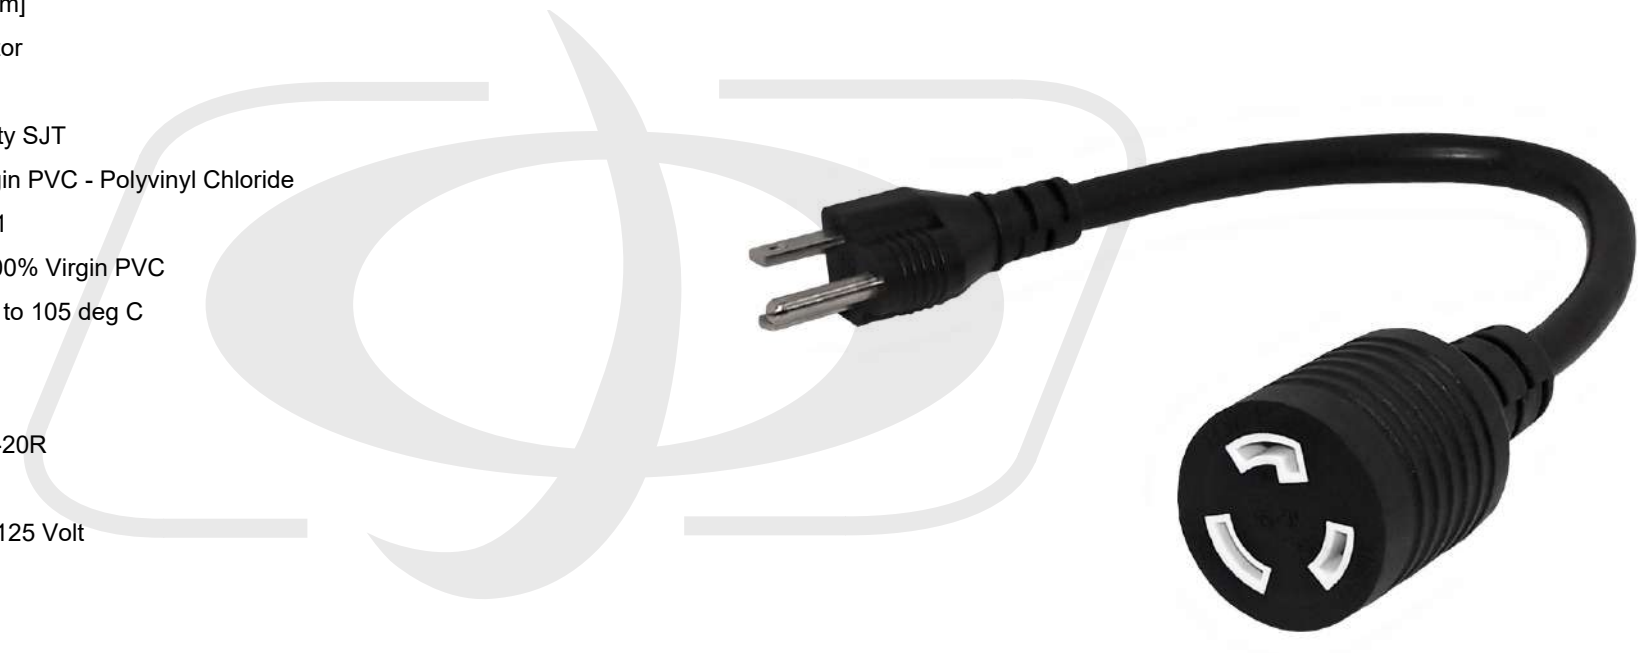

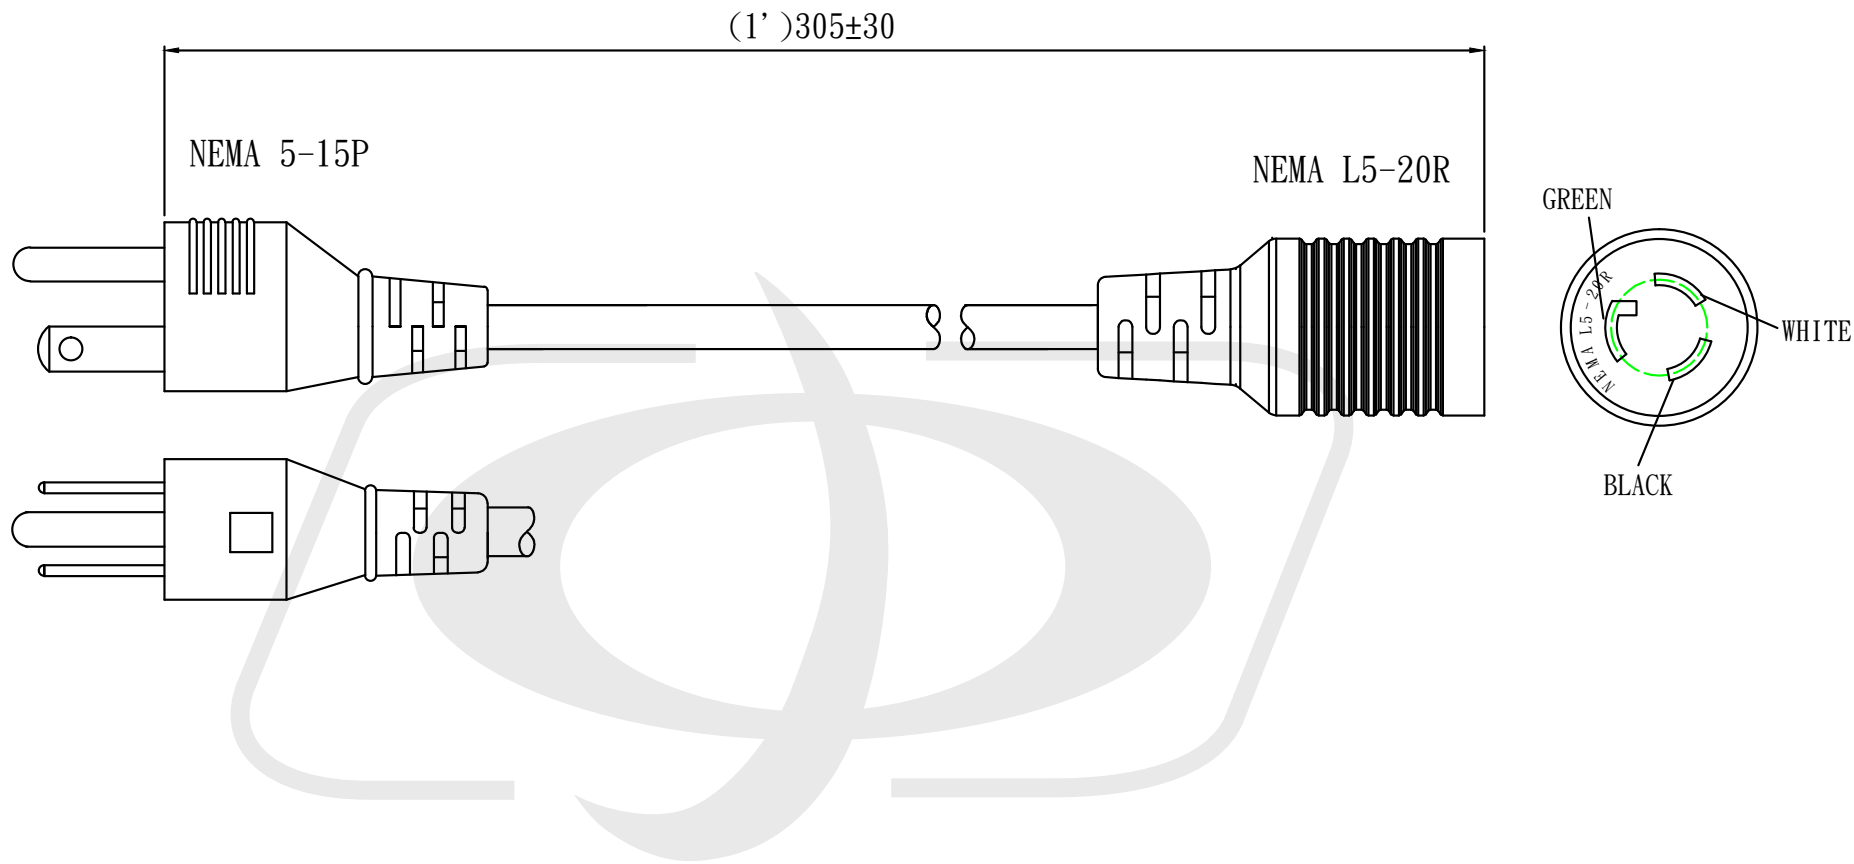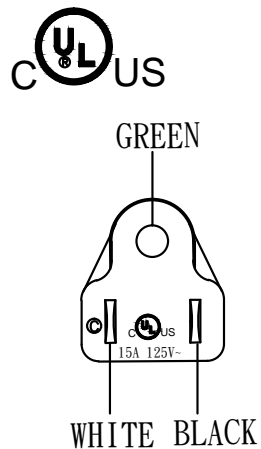

Tolerance



>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°

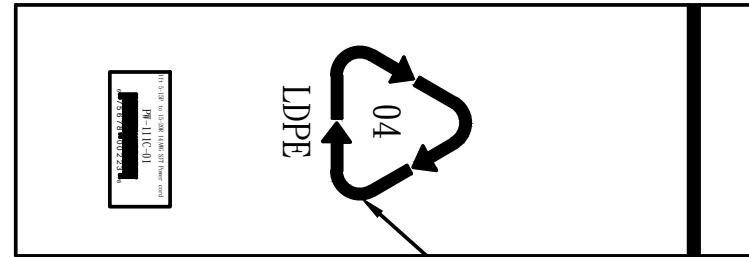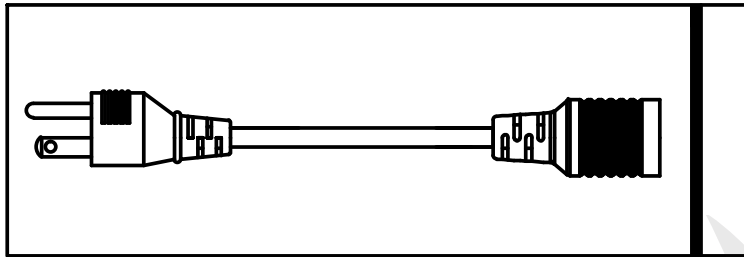

Black Logo

THE INDIVIDUALLY PACKED CORDS WILL  
BE PACKED IN BAGS OF 10 PIECES



UPC-A Code