



12ft IEC C19 Left Angle to IEC C20 Power Cable - 12AWG

PW-125L9-12 - Specifications

Description

This power cord consists of a C20 male on one end and a C19 left angle female on the other end. It is typically used to connect a server to a PDU in a data center environment. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	12 foot [3.6m]
Number of Conductors	3 Conductor
Wire Gauge	12 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	IEC 60320 C19 Left Angle
Connector B	IEC 60320 C20

Performance

Power Rating	20 Amp / 250 Volt
--------------	-------------------



Approvals / Environmental

C19	c(UL)us
C20	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes



Warranty Information

Warranty	Limited Lifetime
----------	------------------



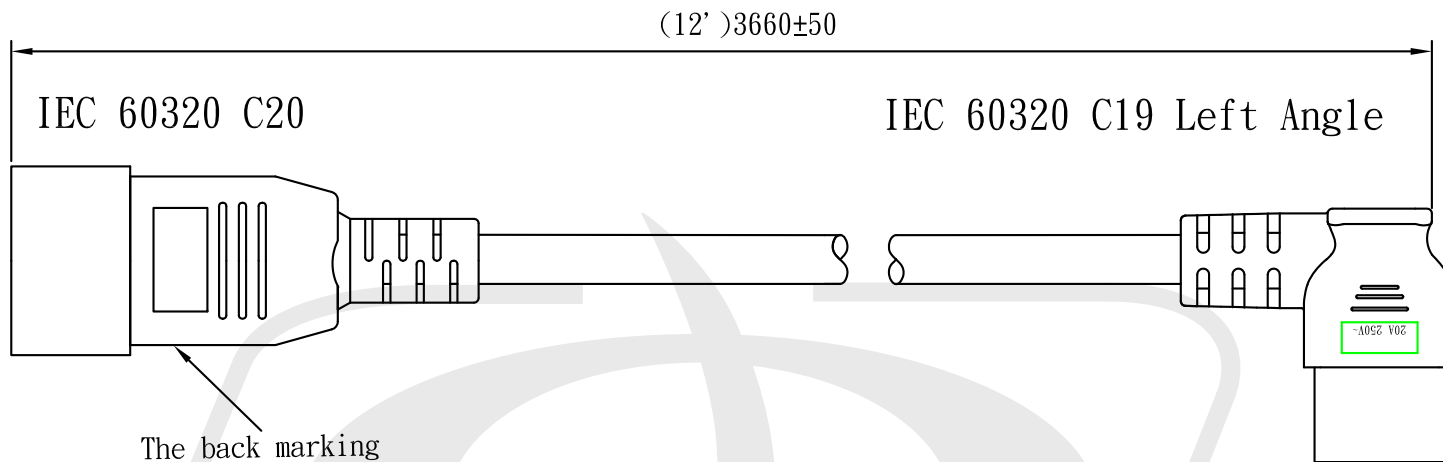

The back marking

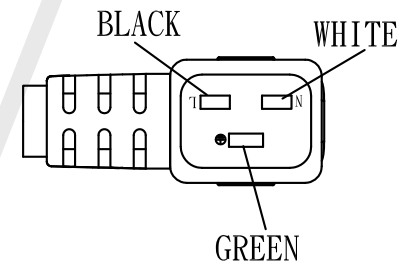

MARKING:

c(UL)us E241374 SJT 3/C 12AWG(3.31mm²) 105°C 300V VW-1

Tolerance



>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°

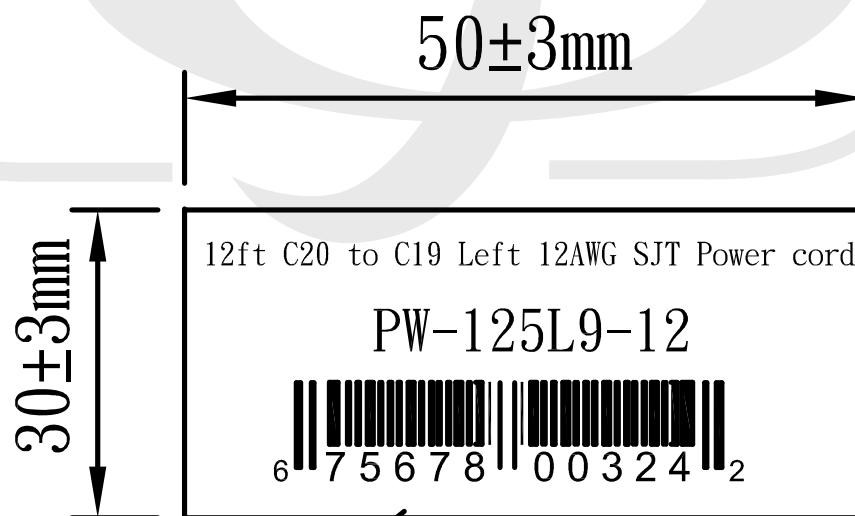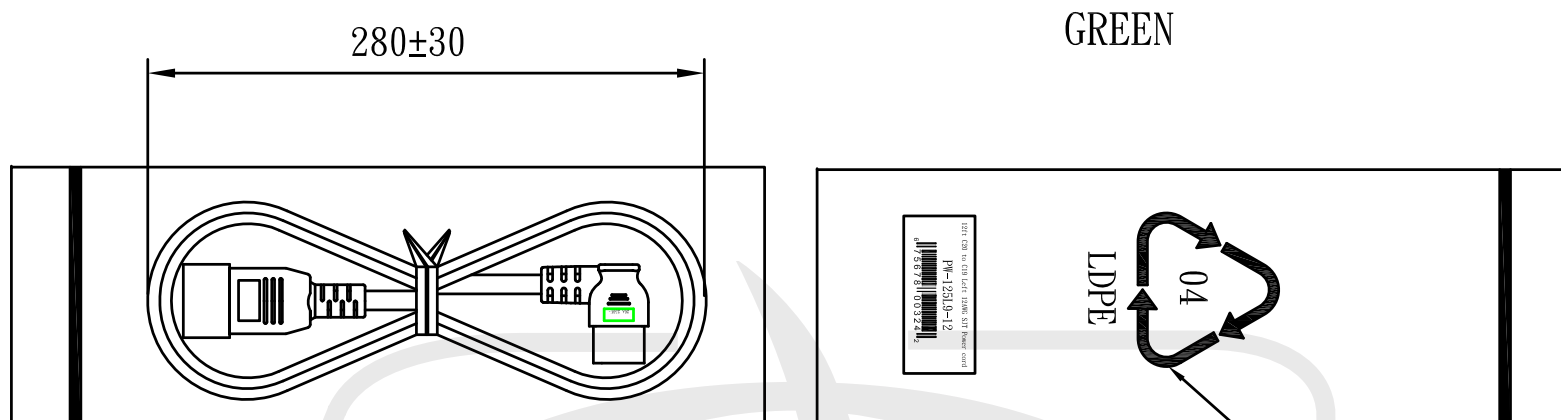

UPC-A Code