



# NEMA L5-15P to IEC C19 Power Cable - 14AWG

PW-127-xx - Specifications

**Description**

This power cord consists of a L5-15P male on one end and a C19 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

**Physical Characteristics**

Colors Available	Black
Lengths Available	10ft / 15ft
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1, FT2
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

**Connector(s)**

Connector A	NEMA L5-15P
Connector B	IEC 60320 C19

**Performance**

Power Rating	15 Amp / 125 Volt
--------------	-------------------


**Approvals / Environmental**

L5-15P	c(UL)us
C19	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

**Warranty Information**

Warranty	Limited Lifetime
----------	------------------



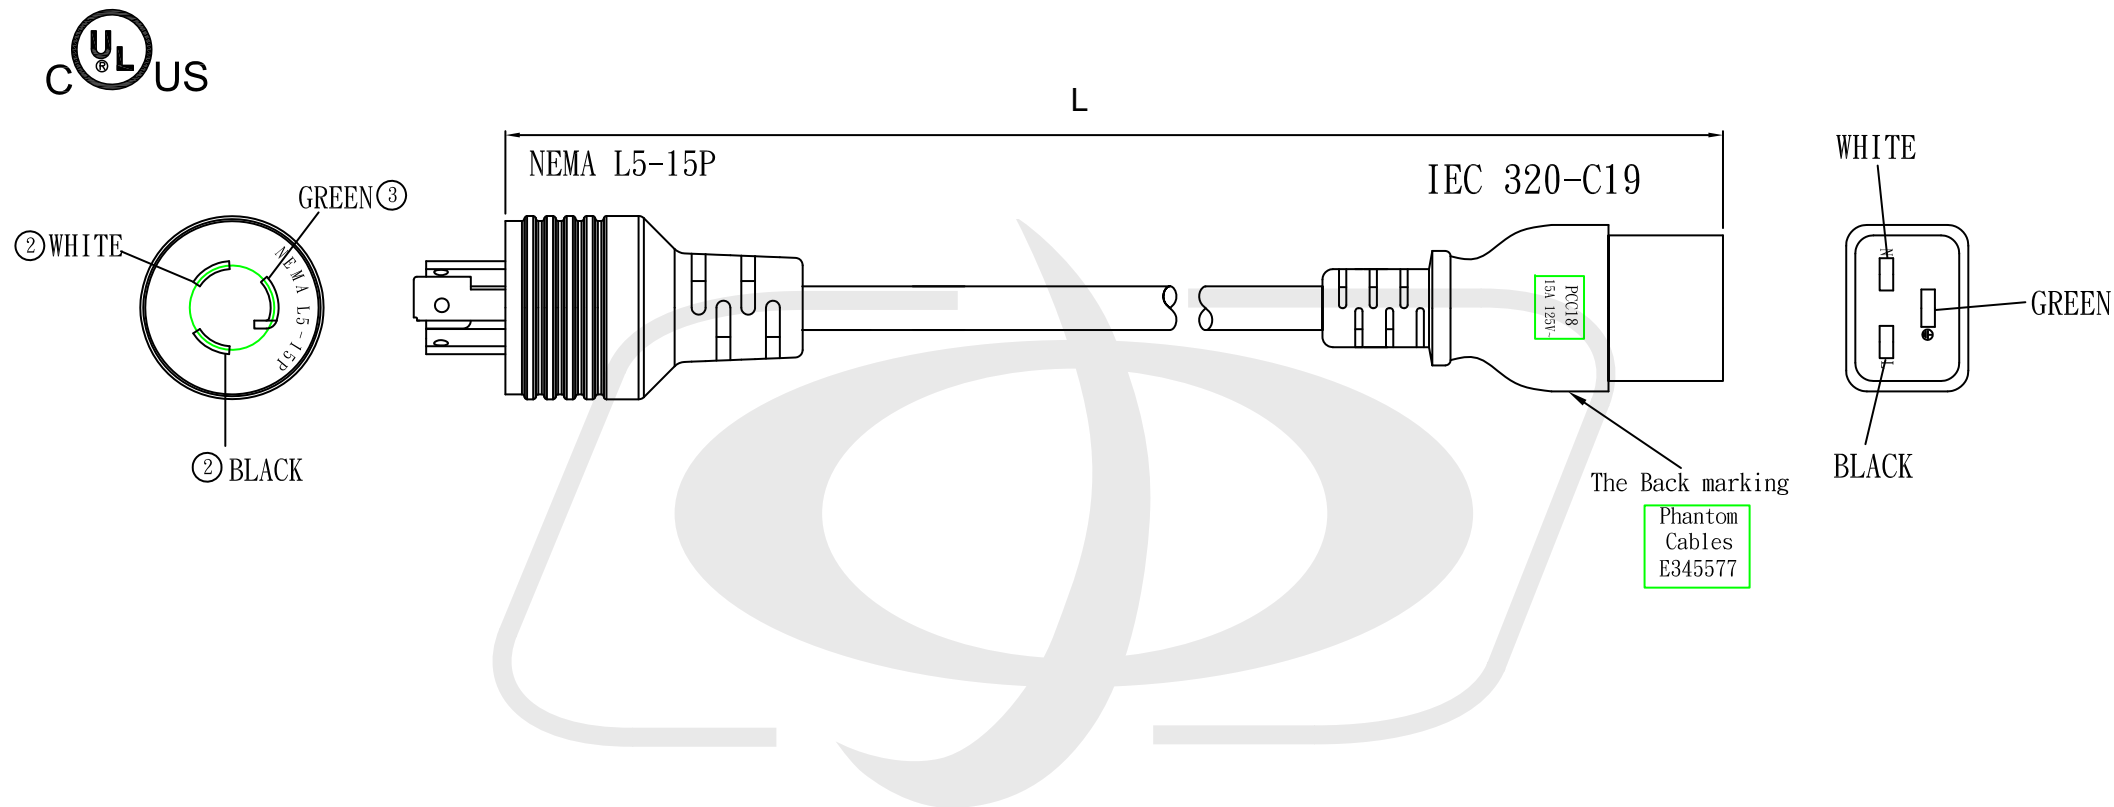

## MARKING:

Phantom Cables c(UL) E345578 SJT 3/C 14AWG(2.08mm<sup>2</sup>) 105 C 300V VW-1

## Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0



>20.0±2.0

Angle: ±1°



# NEMA L5-15P to IEC C19 Power Cable - 14AWG

PW-127-xx - Packaging Information

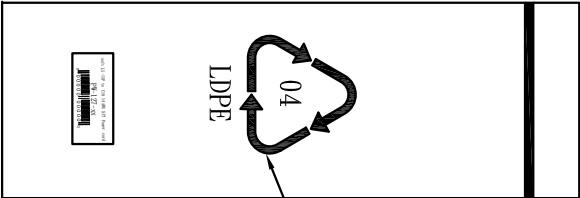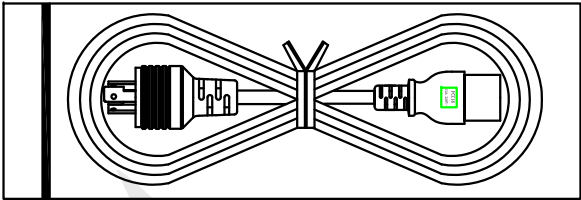

Black Logo

P/N	LENGTH(Lmm)	UPC
PW-127-10	3050mm	675678003358
PW-127-15	4572mm	675678003365

