



# NEMA 5-20P to NEMA 5-20R Power Cable - 12AWG

PW-1315-xx - Specifications

## Description

This power cord consists of a 5-20P male on one end and a 5-20R female on the other end. It is typically used as an extension cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

## Physical Characteristics

Colors Available	Black
Lengths Available	1ft / 3ft / 6ft / 10ft / 15ft
Number of Conductors	3 Conductor
Wire Gauge	12 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

## Connector(s)

Connector A	NEMA 5-20P
Connector B	NEMA 5-15R/5-20R T-Slot

## Performance

Power Rating	20 Amp / 125 Volt
--------------	-------------------

## Approvals / Environmental

5-20P	c(UL)us
5-20R	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

## Warranty Information




Warranty	Limited Lifetime
----------	------------------





# NEMA 5-20P to NEMA 5-20R Power Cable - 12AWG

PW-1315-xx - Line Drawing

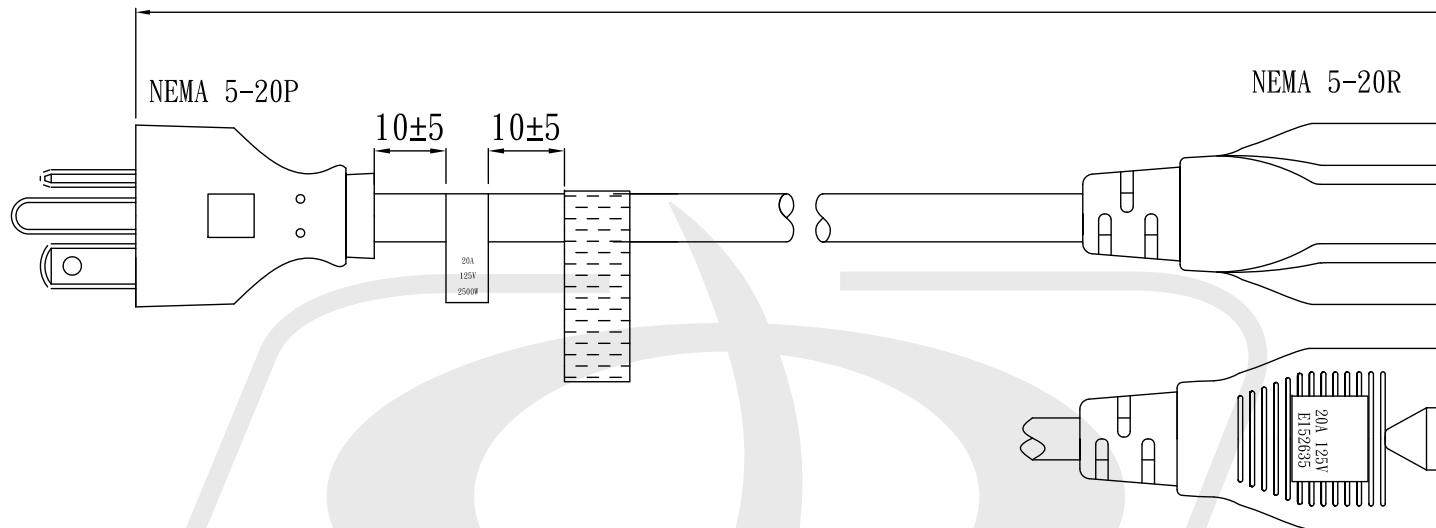

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0



>20.0±2.0

Angle: ±1°



# NEMA 5-20P to NEMA 5-20R Power Cable - 12AWG

PW-1315-xx - Packaging Information

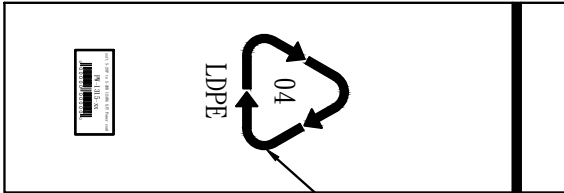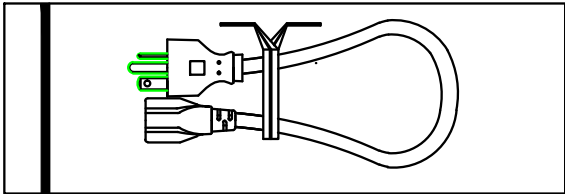

Black Logo

THE INDIVIDUALLY PACKED CORDS WILL  
BE PACKED IN BAGS OF 10 PIECES

P/N	LENGTH(Lmm)	UPC
PW-1315-01	305mm	675678005383
PW-1315-03	915mm	675678005390
PW-1315-06	1830mm	675678005406
PW-1315-10	3050mm	675678005413
PW-1315-15	4570mm	675678005420

