



NEMA L5-20P to NEMA L5-20R Power Cable - 12AWG

PW-132-xx - Specifications

Description

This power cord consists of a L5-20P male on one end and a L5-20R female on the other end. It is typically used as an extension cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors Available	Black
Lengths Available	10ft / 15ft
Number of Conductors	3 Conductor
Wire Gauge	12 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1, FT2
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	NEMA L5-20R
Connector B	NEMA L5-20P

Performance

Power Rating	20 Amp / 125 Volt
--------------	-------------------




Approvals / Environmental

L5-20P	c(UL)us
L5-20R	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------



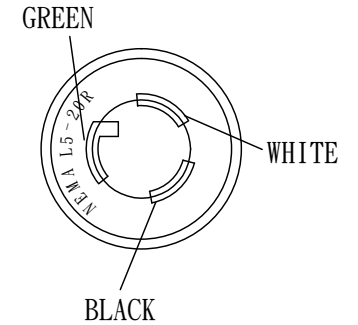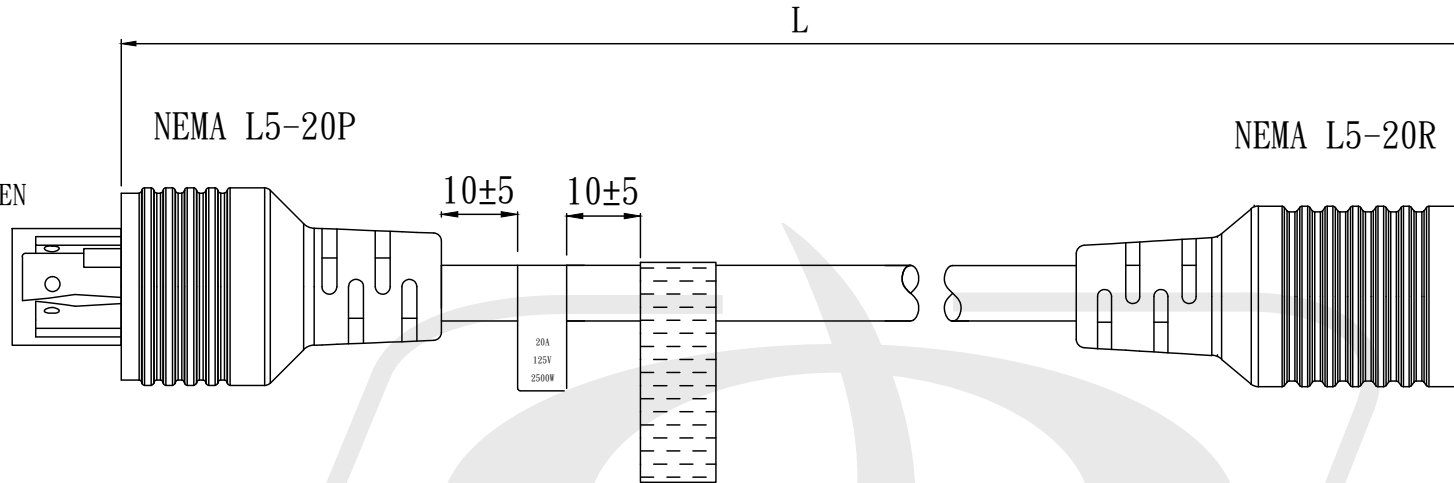

MARKING:

c(UL)us E241374 SJT 3/C 12AWG(3.31mm²) 105°C 300V VW-1

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0



>20.0±2.0

Angle: ±1°



NEMA L5-20P to NEMA L5-20R Power Cable - 12AWG

PW-132-xx - Packaging Information

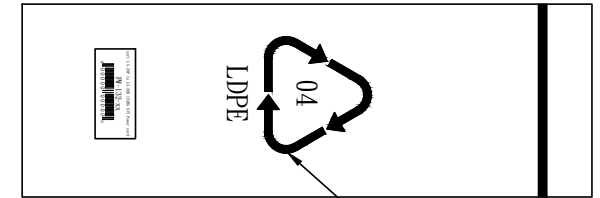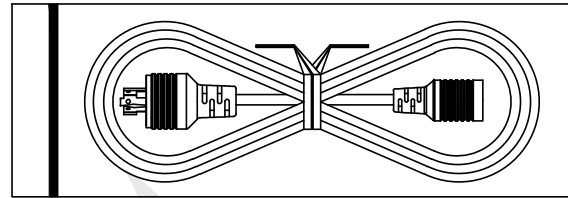

Black Logo

P/N	LENGTH(Lmm)	UPC
PW-132-10	3050mm	675678003457
PW-132-15	4572mm	675678003464

