



NEMA L5-20P to IEC C19 Power Cable - SJT - 12AWG

PW-134-xx - Specifications

Description

This power cord consists of a L5-20P male on one end and a C19 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Number of Conductors	3 Conductor
Wire Gauge	12 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	NEMA L5-20P
Connector B	IEC 60320 C19

Performance


Power Rating	20 Amp / 125 Volt
--------------	-------------------

Approvals / Environmental

L5-20P	c(UL)us
C19	c(UL)us
Cable	c(UL)us, CSA
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------

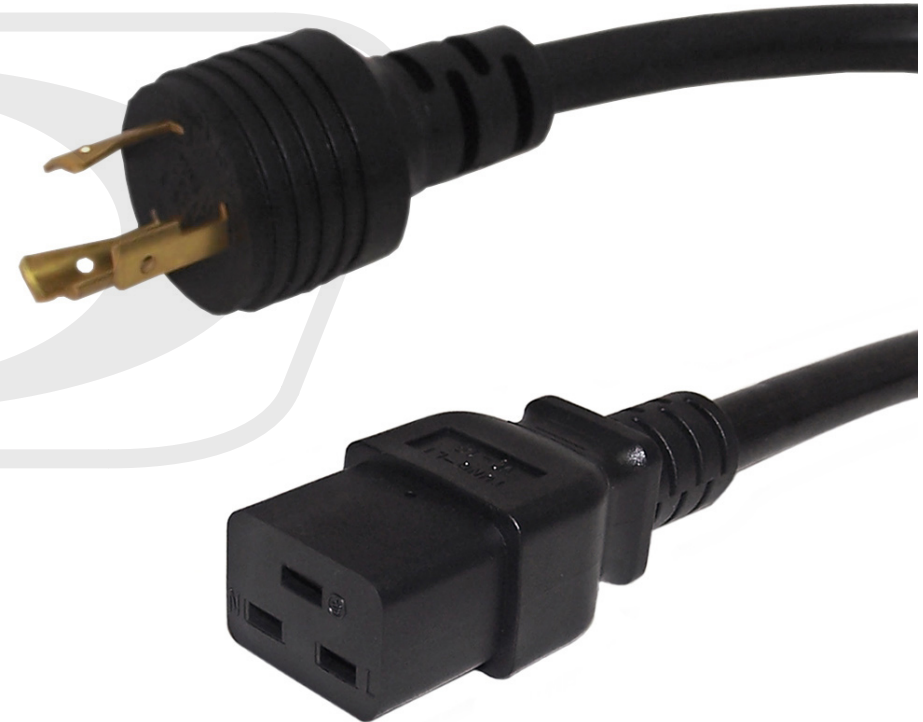


Cable Weights

3ft	6ft	15ft
0.61 lbs	1.10 lbs	2.00 lbs

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 12AWG(3.31mm²) 105°C 300V VW-1
 CSA 252681 SJT 3/C 12AWG(3.31mm²) 105°C 300V FT2 (6')1830±50

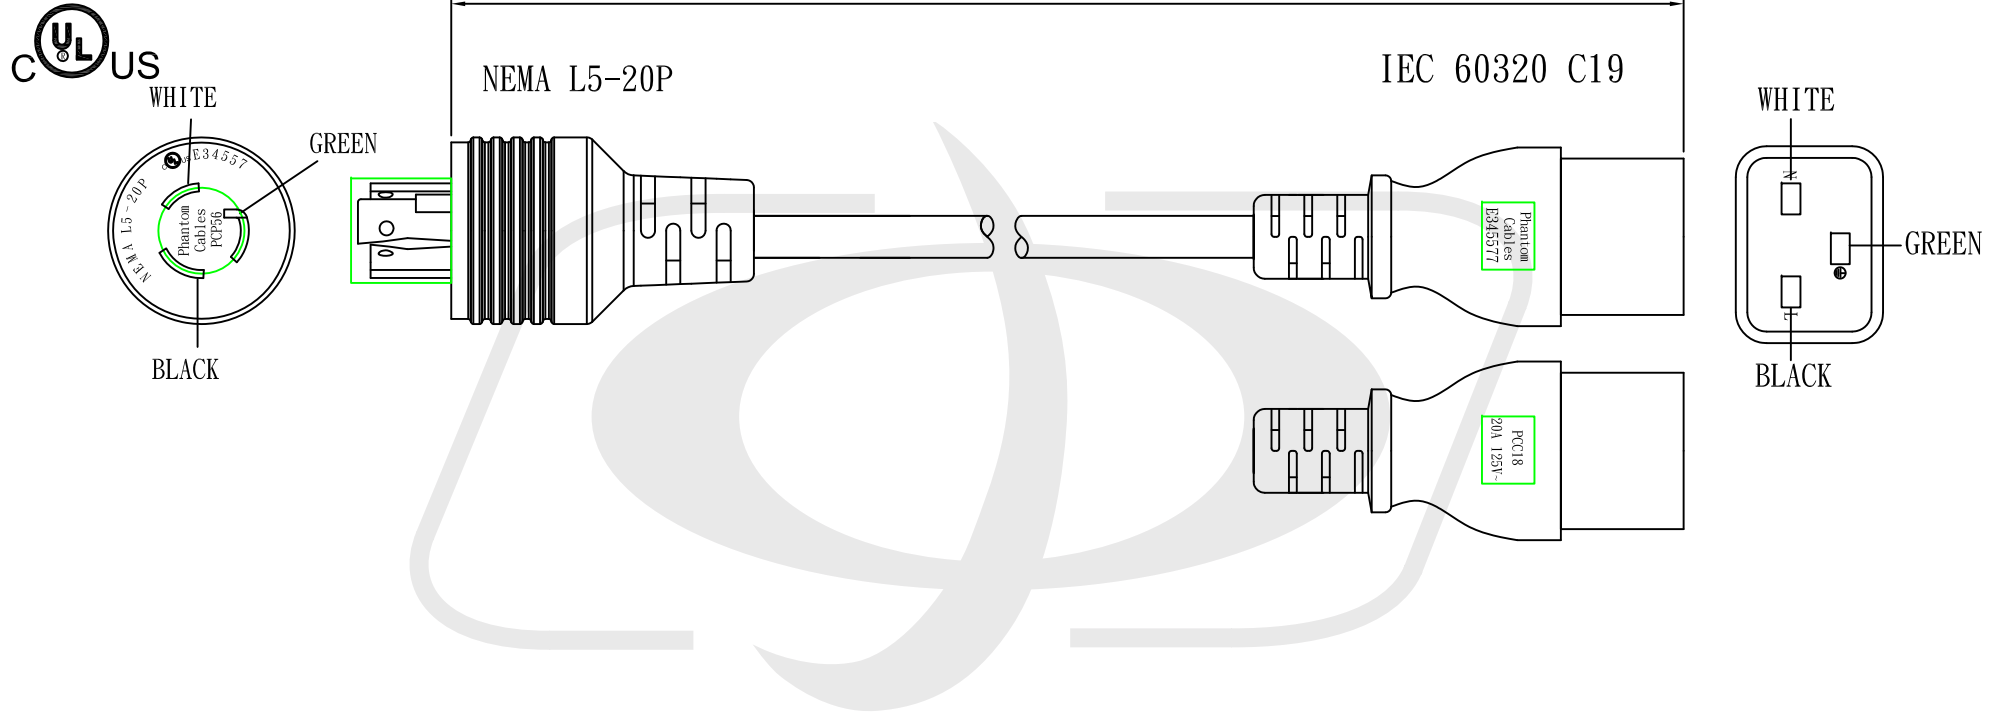

Tolerance


>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°

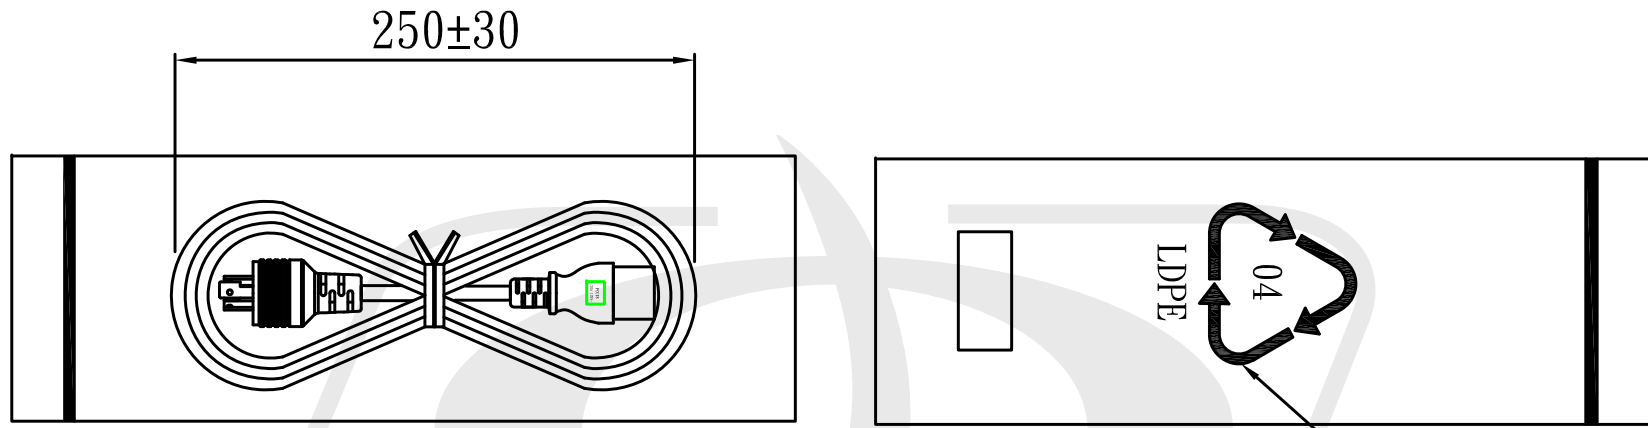

THE INDIVIDUALLY BAGGED CORDS WILL BE PLACED IN BAGS OF 10 PIECES

