



10ft NEMA L6-15P to IEC C13 Power Cable - 14AWG

PW-137-10 - Specifications

Description

This power cord consists of a L6-15P male on one end and a C13 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	10 foot [3m]
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	NEMA L6-15P
Connector B	IEC 60320 C13

Performance

Power Rating	15 Amp / 250 Volt
--------------	-------------------


Approvals / Environmental

L6-15P	c(UL)us
C13	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------



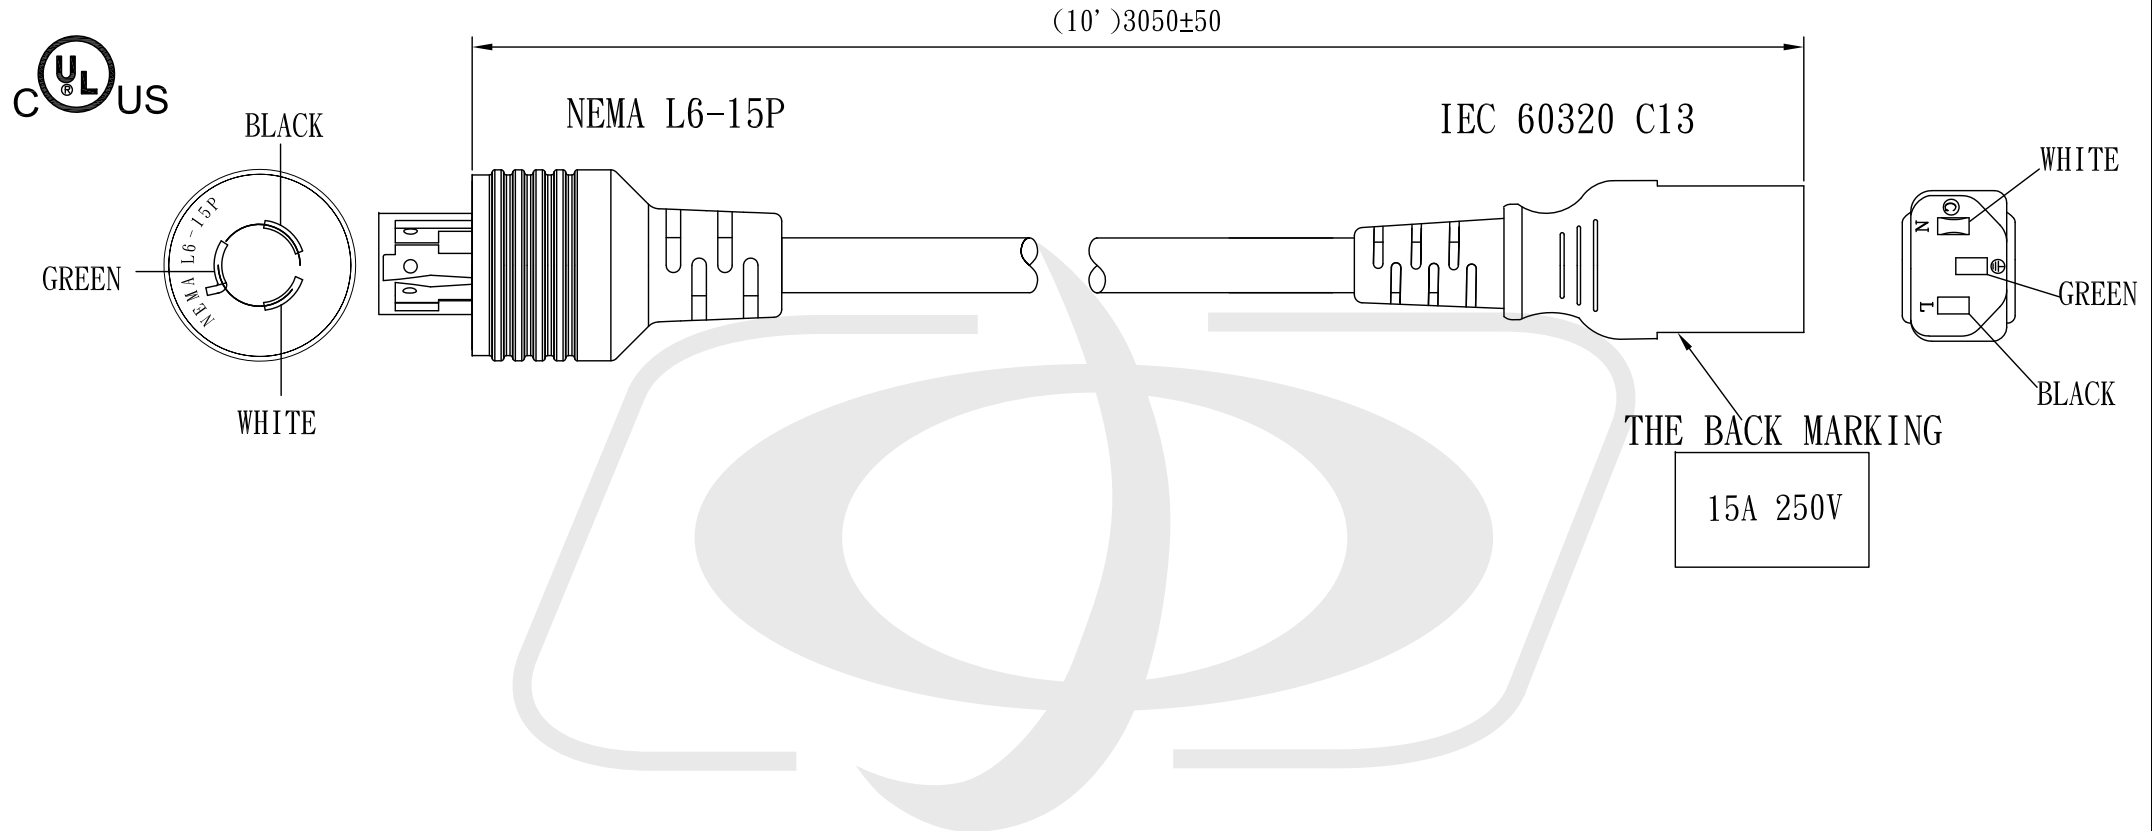

MARKING:

c(UL)us E241374 SJT 3/C 14AWG(2.08mm²) 105°C 300V VW-1

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°



10ft NEMA L6-15P to IEC C13 Power Cable - 14AWG

PW-137-10 - Packaging Information

