



1ft IEC C14 to NEMA L6-20R Power Cable - 14AWG

PW-1485-01 - Specifications

Description

This power cord consists of a C14 male on one end and a L6-20R female on the other end. It is typically used as an adapter cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	1 foot [0.3m]
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	IEC 60320 C14
Connector B	NEMA L6-20R

Performance

Power Rating	15 Amp / 250 Volt
--------------	-------------------


Approvals / Environmental

C14	c(UL)us
L6-20R	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------



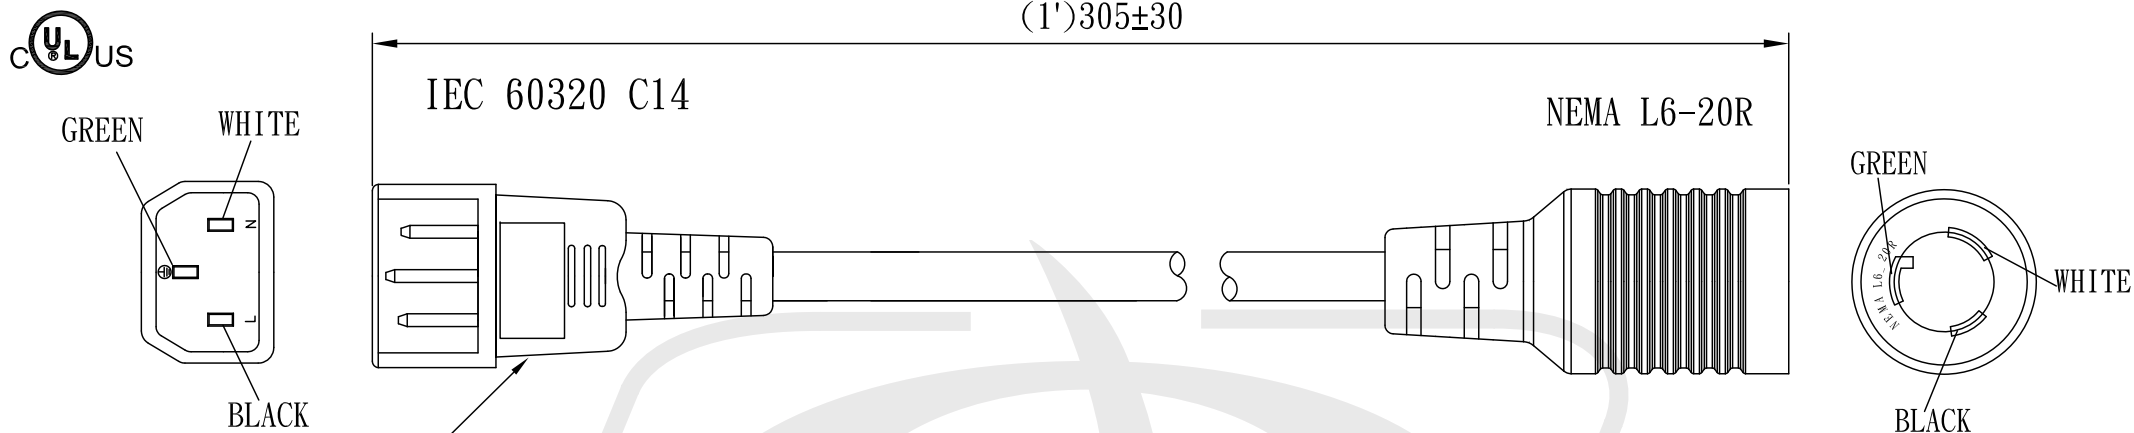

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0


>20.0±2.0

Angle: ±1°



1ft IEC C14 to NEMA L6-20R Power Cable - 14AWG


PW-1485-01 - Packaging Information

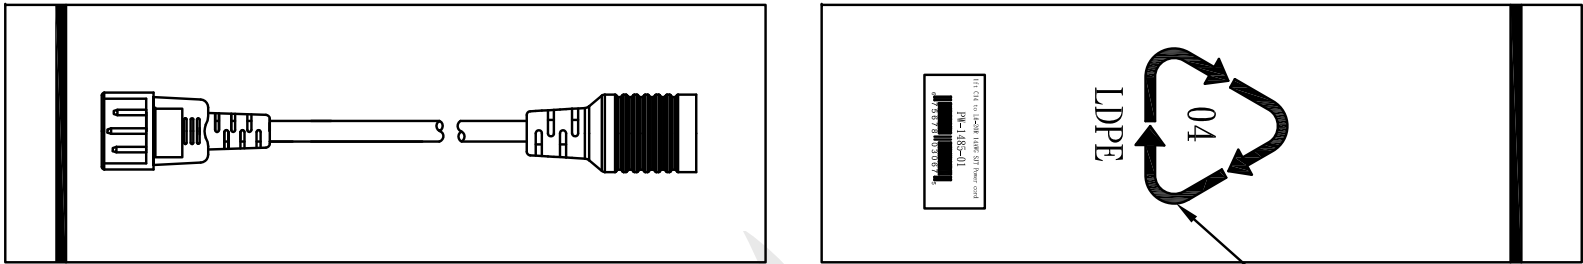

Black Logo

THE INDIVIDUALLY PACKED CORDS WILL
BE PACKED IN BAGS OF 10 PIECES

50±3mm

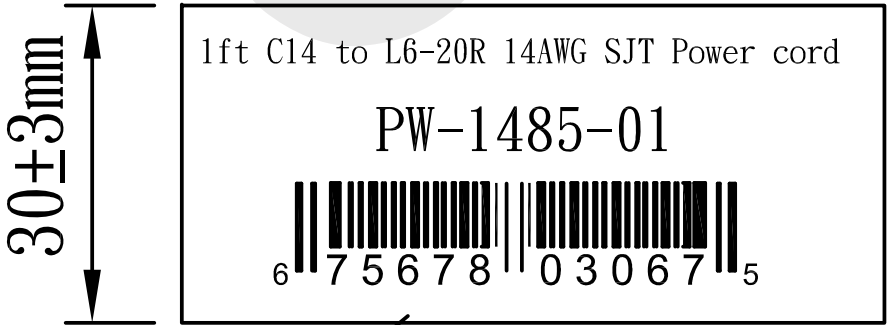

UPC-A Code