

### 15ft NEMA L5-30P to NEMA L5-30R Power Cable - 10AWG

PW-157-15 - Specifications

### **Description**

This power cord consists of a L5-30P male on one end and a L5-30R female on the other end. It is typically used as an extension cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

#### **Physical Characteristics**

Color Black

Length 15 foot [4.5m]

Number of Conductors 3 Conductor

Wire Gauge 10 AWG

Jacket Heavy Duty SJT

Jacket Material 100% Virgin PVC - Polyvinyl Chloride

Jacket Fire Rating FT2, VW-1

Strain Relief Molded 100% Virgin PVC
Temperature Rating -20 deg C to 105 deg C

Connector(s)

Connector A NEMA L5-30P
Connector B NEMA L5-30R

<u>Performance</u>

Power Rating 30 Amp / 125 Volt

**Approvals / Environmental** 

 $\begin{array}{cc} \text{L5-30P} & \text{c(UL)us} \\ \text{L5-30R} & \text{c(UL)us} \\ \text{Cable} & \text{c(UL)us} \\ \end{array}$ 

ISO ISO 9001:2015, ISO 14000

RoHS Yes
Reach Yes
Conflict Minerals Yes

**Warranty Information** 


Warranty Limited Lifetime





# 15ft NEMA L5-30P to NEMA L5-30R Power Cable - 10AWG

PW-157-15 - Line Drawing

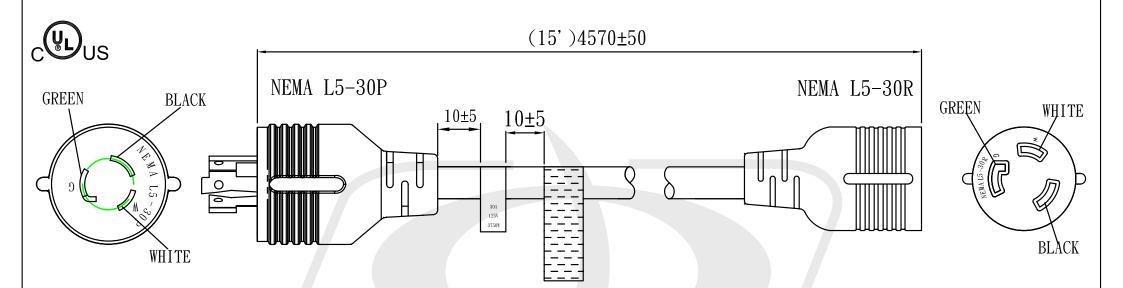

Tolerance

 $>0\pm0.30$ 

>1. 0±0. 50

 $>10.0\pm1.0$ 

>20.0±2.0

Angle: ±1°



## 15ft NEMA L5-30P to NEMA L5-30R Power Cable - 10AWG

PW-157-15 - Packaging Information

