



# 2m SCHUKO CEE 7/7 (Euro) to IEC C5 Power Cable

PW-172-2M - Specifications

**Description**

This power cord consists of a Schuko CEE 7/7 male on one end and a C5 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

**Physical Characteristics**

Color	Black
Length	2m
Number of Conductors	3 Conductor
Wire Gauge	0.75mm2
Jacket	H05VV-F
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Strain Relief	Molded 100% Virgin PVC

**Connector(s)**

Connector A	SCHUKO CEE 7/7 (Euro)
Connector B	IEC 60320 C5

**Performance**


Power Rating	2.5 Amp / 250 Volt
--------------	--------------------



**Approvals / Environmental**

Standards	Manufactured in Compliance With SCHUKO
ISO	ISO 9001:2015, ISO 14000
Additional Standards	
Available Upon Request	
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

**Warranty Information**

Warranty	Limited Lifetime
----------	------------------

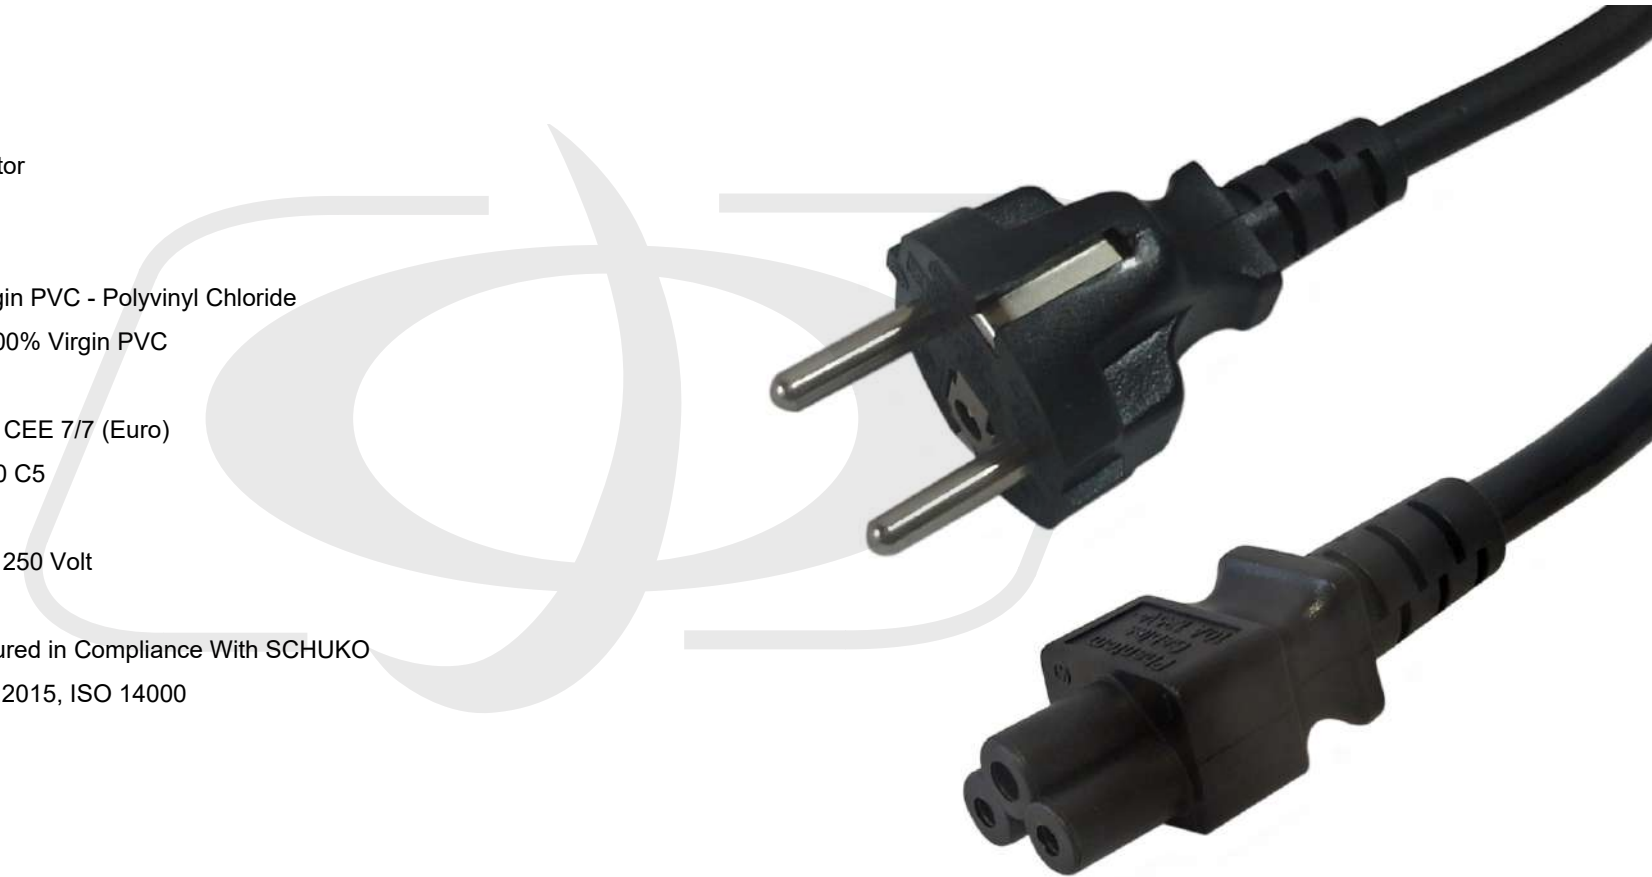

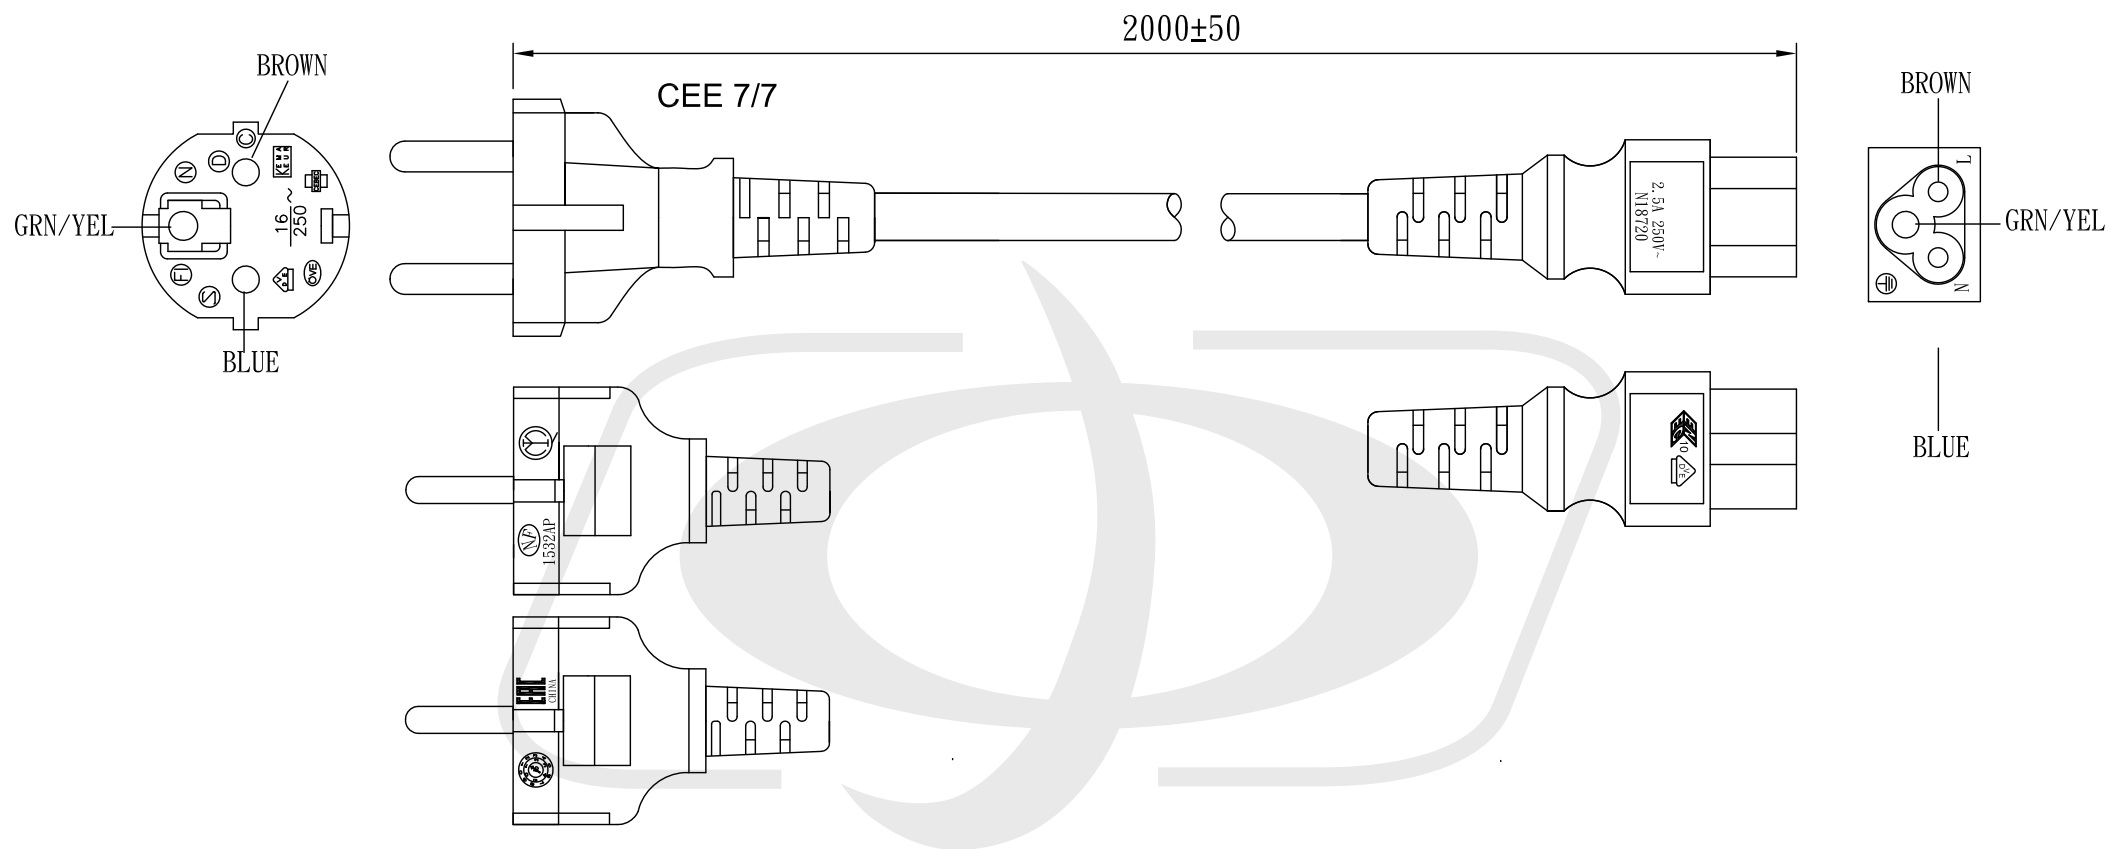

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0


>20.0±2.0

Angle: ±1°




# 2m SCHUKO CEE 7/7 (Euro) to IEC C5 Power Cable

PW-172-2M - Packaging Information

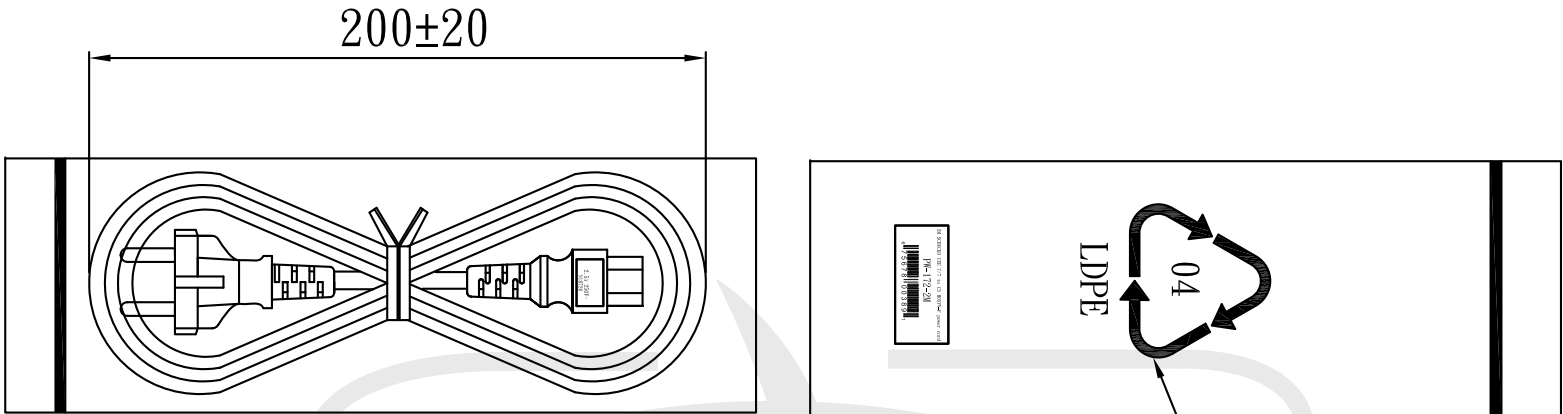

THE INDIVIDUALLY PACKED CORDS WILL  
BE PACKED IN BAGS OF 10 PIECES

Black Logo

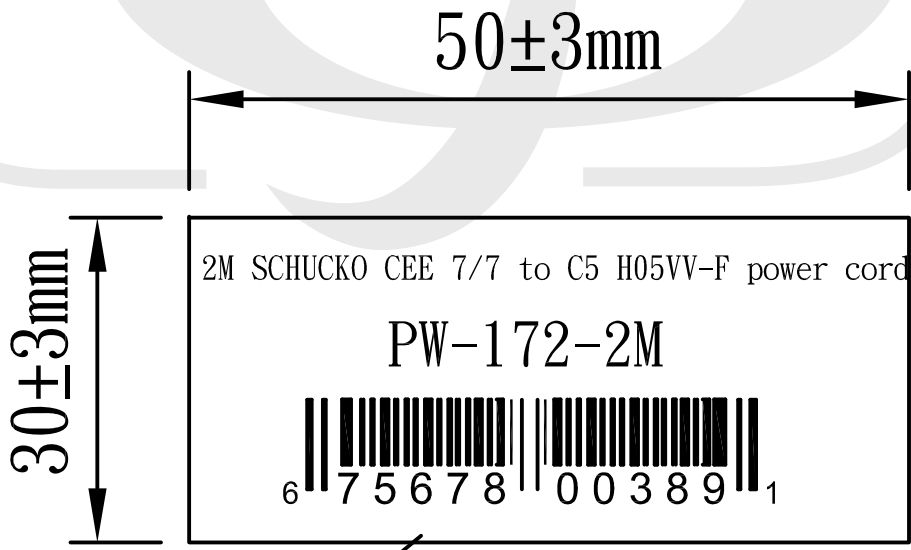

UPC-A Code