



2m BS1363 (UK) to IEC-C5 Power Cable

PW-177-2M - Specifications

Description

This power cord consists of a BS1363 male on one end and a C5 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	2m
Number of Conductors	3 Conductor
Wire Gauge	0.75mm ²
Jacket	H05VV-F
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Strain Relief	Molded 100% Virgin PVC

Connector(s)

Connector A	BS1363 (UK)
Connector B	IEC 60320 C5

Performance

Power Rating	2.5 Amp / 250 Volt
--------------	--------------------


Approvals / Environmental

Standards	Manufactured in Compliance With BS1363
ISO	ISO 9001:2015, ISO 14000
Additional Standards	
Available Upon Request	
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------




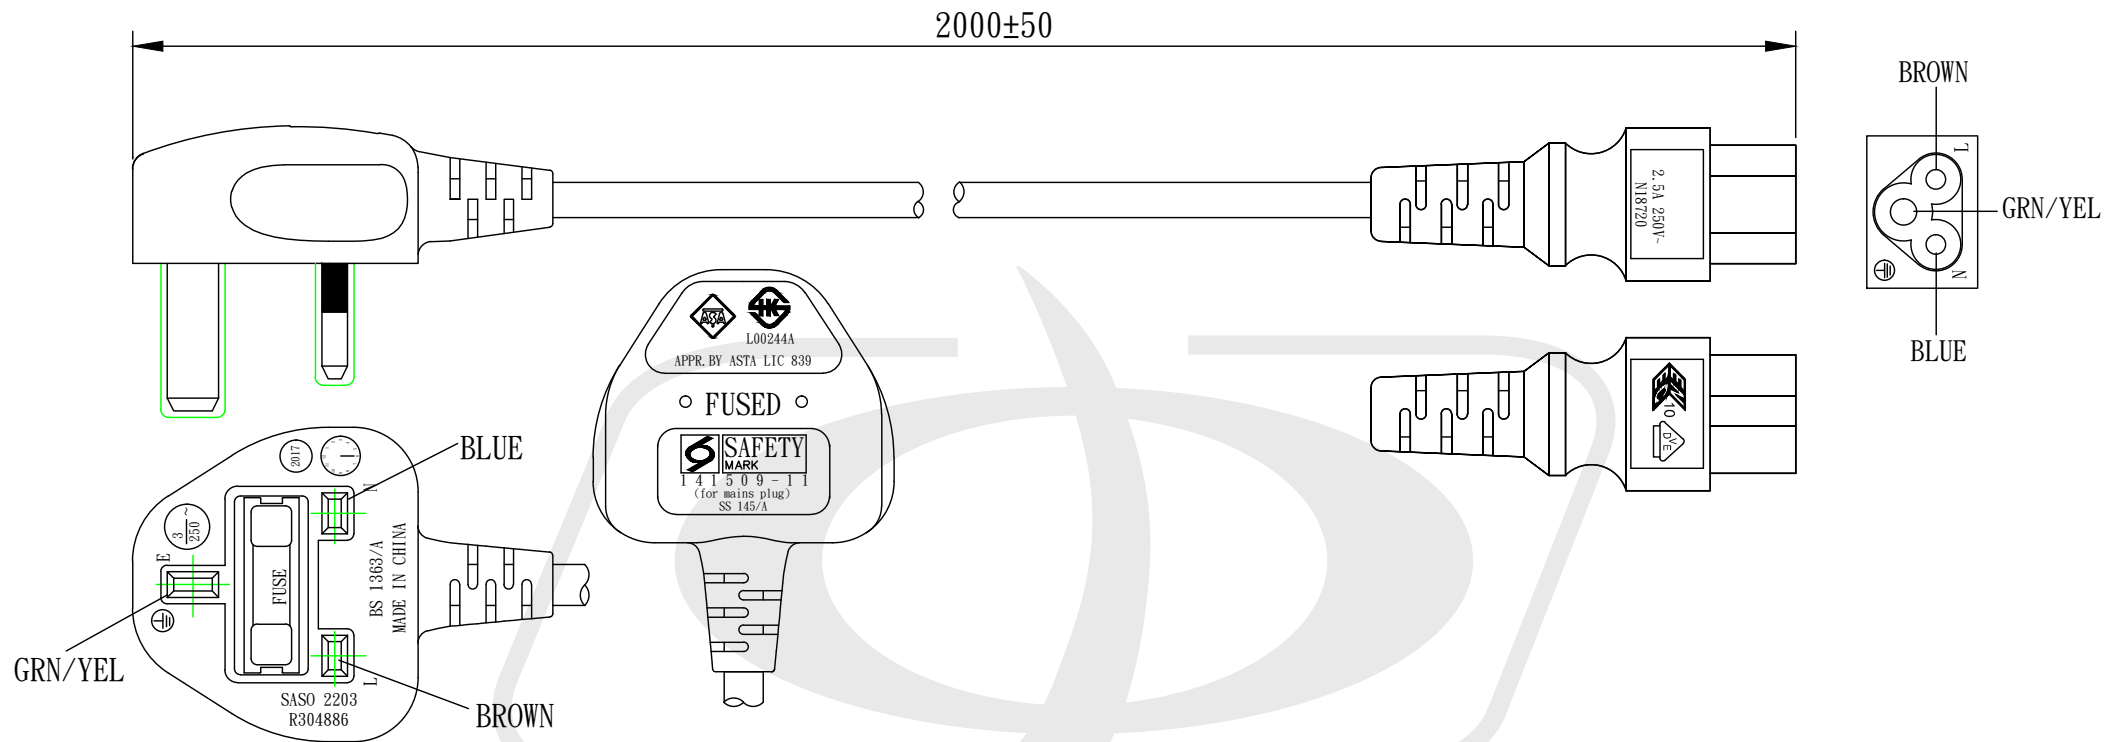

$\frac{3}{250}$ ~ BS1363/A 2017 APPR. BY ASTA LIC 839 L00244A SASO R304886
 MADE IN CHINA (for mains plug) SS 145/A

10 N18720

Tolerance
 >0±0.30
 >1.0±0.50
 >10.0±1.0
 >20.0±2.0
Angle: ±1°

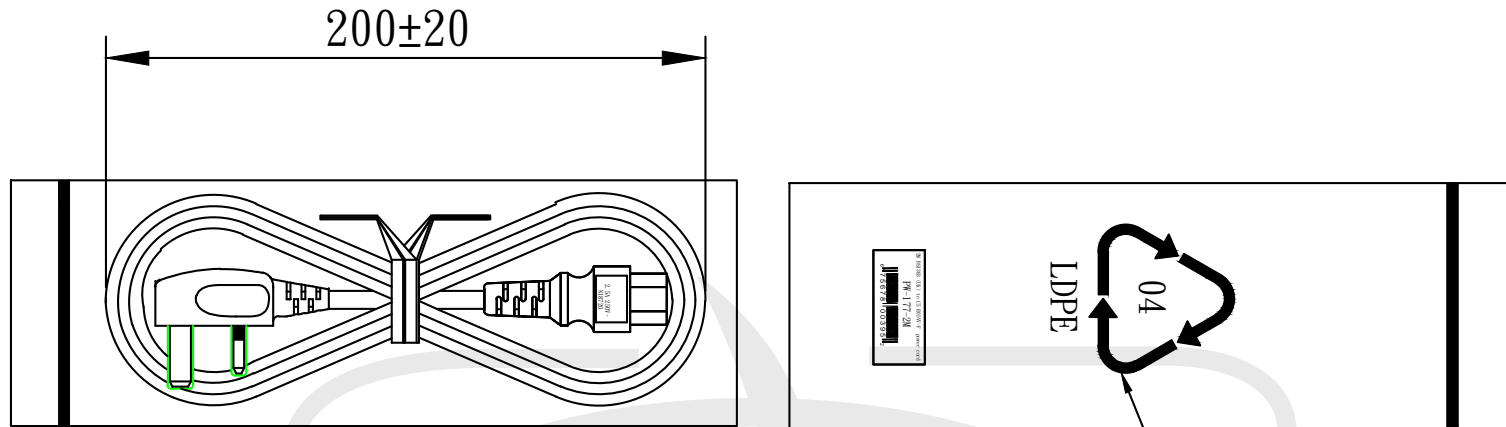

THE INDIVIDUALLY PACKED CORDS WILL
BE PACKED IN BAGS OF 10 PIECES

Black Logo

50 ± 3 mm



UPC-A Code