



AS3112 (Australia) to IEC C13 Power Cord

PW-180-xM - Specifications

Description

This power cord consists of a AS3112 male on one end and a C13 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	1m / 2m / 3m
Number of Conductors	3 Conductor
Wire Gauge	1.0mm2
Jacket	H05VV-F
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Strain Relief	Molded 100% Virgin PVC

Connector(s)

Connector A	AS3112 (Australia)
Connector B	IEC 60320 C13

Performance

Power Rating	10 Amp / 250 Volt
--------------	-------------------

Approvals / Environmental

Standards	Manufactured in Compliance With AS3112
ISO	ISO 9001:2015, ISO 14000
Additional Standards	
Available Upon Request	
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information


Warranty	Limited Lifetime
----------	------------------





AS3112 (Australia) to IEC C13 Power Cord

PW-180-xM - Line Drawing

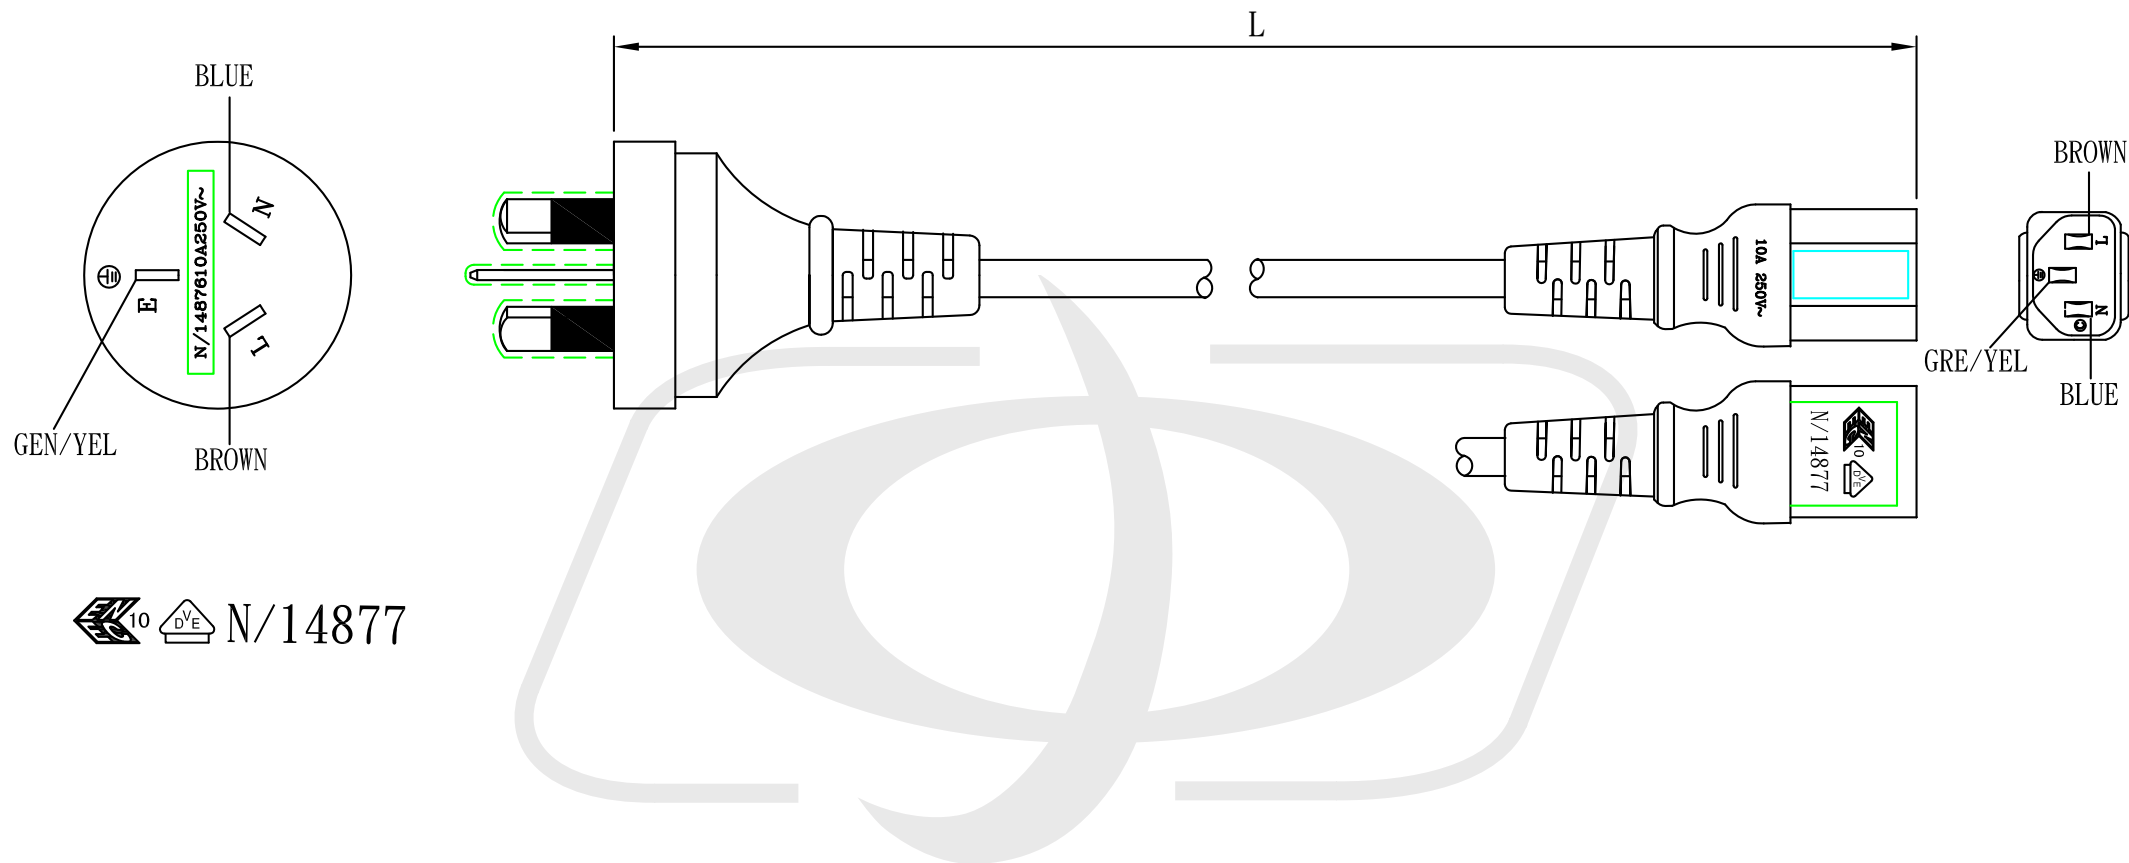

  N/14877

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0


>20.0±2.0

Angle: ±1°



AS3112 (Australia) to IEC C13 Power Cord

PW-180-xM - Packaging Information

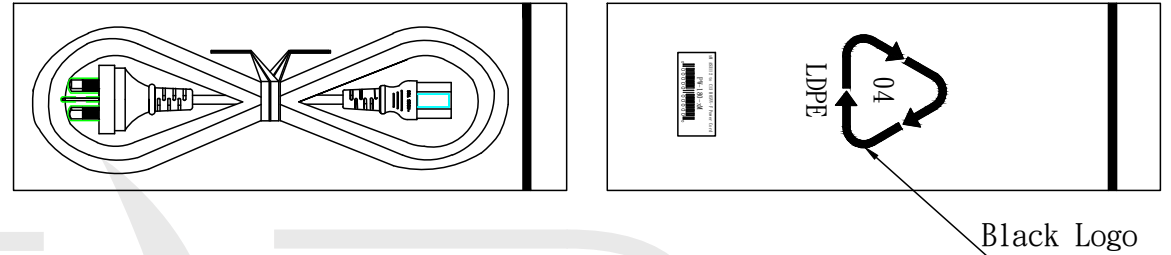

P/N	LENGTH(Lmm)	UPC
PW-180-1M	1000mm	675678003976
PW-180-2M	2000mm	675678003983
PW-180-3M	3000mm	675678003990

