



2m CEI 23-16 (Italy) to IEC C13 Power Cord

PW-190-2M - Specifications

Description

This power cord consists of a CEI 23-16 male on one end and a C13 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

| | |
|----------------------|--------------------------------------|
| Color | Black |
| Length | 2m |
| Number of Conductors | 3 Conductor |
| Wire Gauge | 1.0mm2 |
| Jacket | H05VV-F |
| Jacket Material | 100% Virgin PVC - Polyvinyl Chloride |
| Strain Relief | Molded 100% Virgin PVC |

Connector(s)

| | |
|-------------|-------------------|
| Connector A | CEI 23-16 (Italy) |
| Connector B | IEC 60320 C13 |

Performance


| | |
|--------------|------------------|
| Power Rating | 5 Amp / 250 Volt |
|--------------|------------------|

Approvals / Environmental

| | |
|------------------------|-------------------------------------|
| Standards | Manufactured in Compliance With CEI |
| ISO | 23-16 ISO 9001:2015, ISO 14000 |
| Additional Standards | |
| Available Upon Request | |
| RoHS | Yes |
| Reach | Yes |
| Conflict Minerals | Yes |

Warranty Information


| | |
|----------|------------------|
| Warranty | Limited Lifetime |
|----------|------------------|

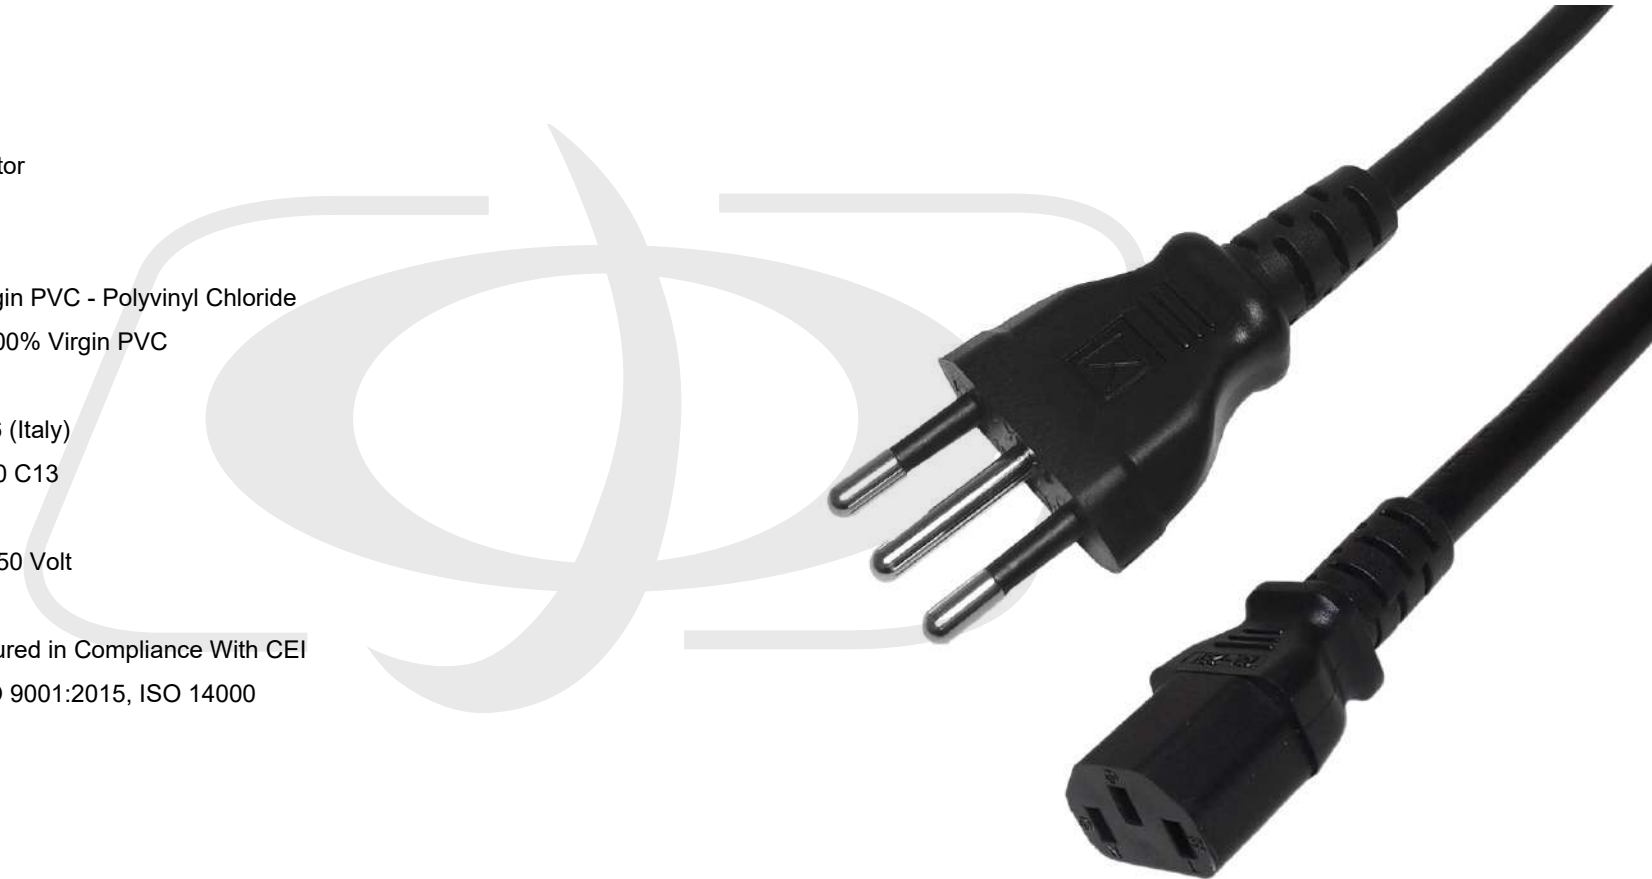



2m CEI 23-16 (Italy) to IEC C13 Power Cord

PW-190-2M - Line Drawing

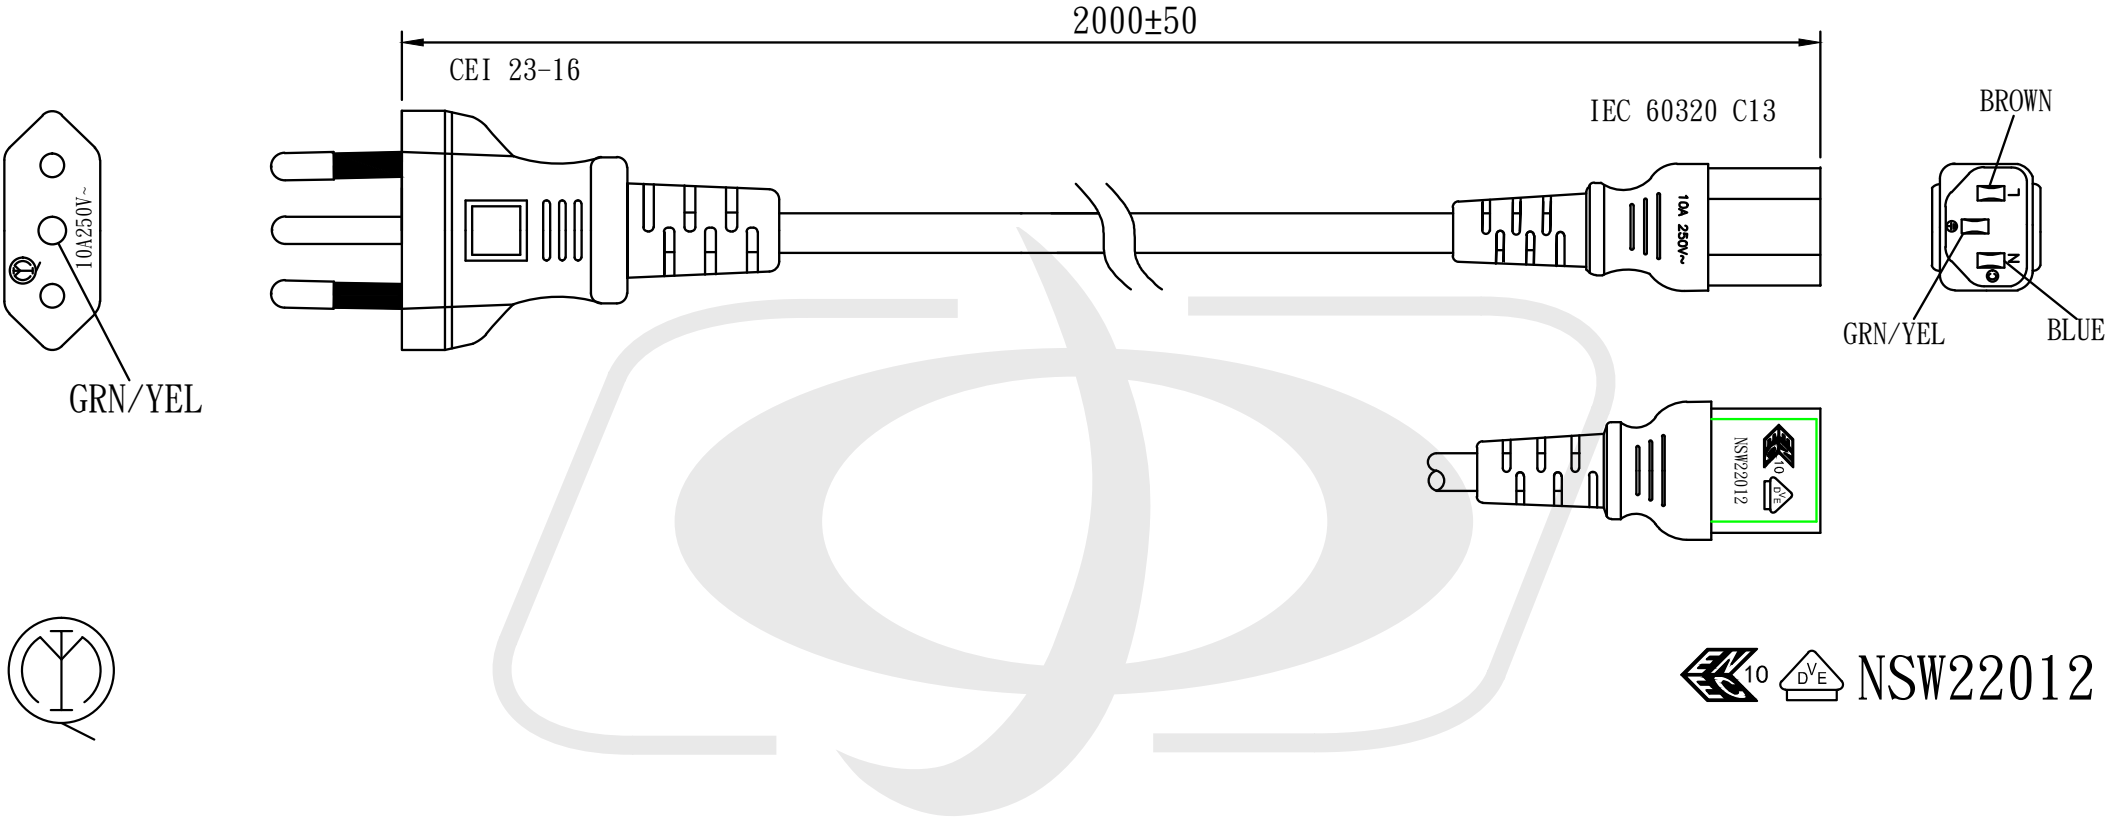

10 DVE NSW22012

>0±0.30

>1.0±0.50

>10.0±1.0


>20.0±2.0

Angle: ±1°



2m CEI 23-16 (Italy) to IEC C13 Power Cord

PW-190-2M - Packaging Information

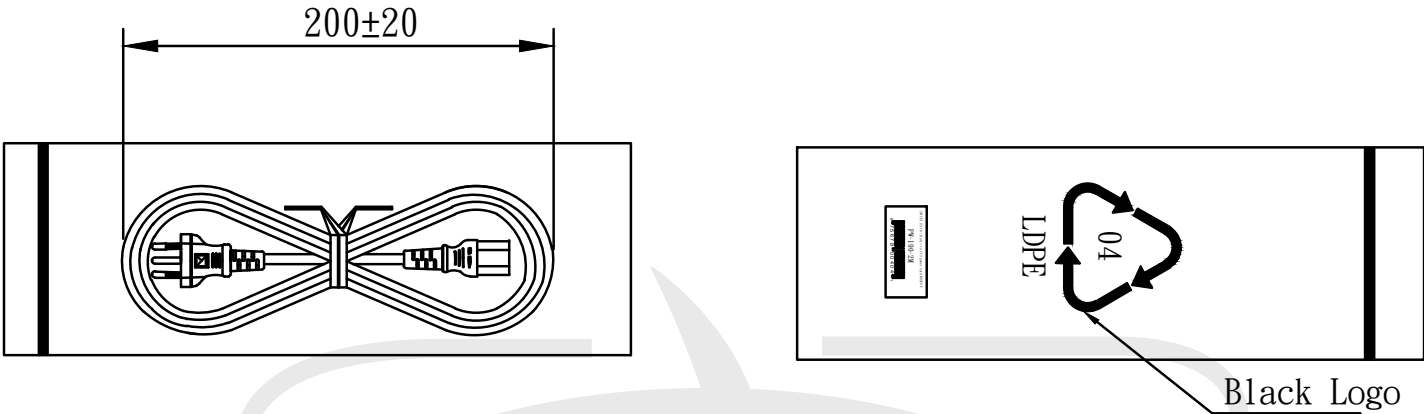

THE INDIVIDUALLY PACKED CORDS WILL
BE PACKED IN BAGS OF 10 PIECES

