



2m BS546 (India) to IEC C13 Power Cord

PW-618-2M - Specifications

Description

This power cord consists of a BS546 male on one end and a C13 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	2m
Number of Conductors	3 Conductor
Wire Gauge	1.0mm2
Jacket	YY
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Strain Relief	Molded 100% Virgin PVC

Connector(s)

Connector A	BS546 (India)
Connector B	IEC 60320 C13

Performance

Power Rating	10 Amp / 250 Volt
--------------	-------------------

Approvals / Environmental

Standards	Manufactured in Compliance With
ISO	BS546 ISO 9001:2015, ISO 14000
Additional Standards	
Available Upon Request	
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information


Warranty	Limited Lifetime
----------	------------------





2m BS546 (India) to IEC C13 Power Cord

PW-618-2M - Line Drawing

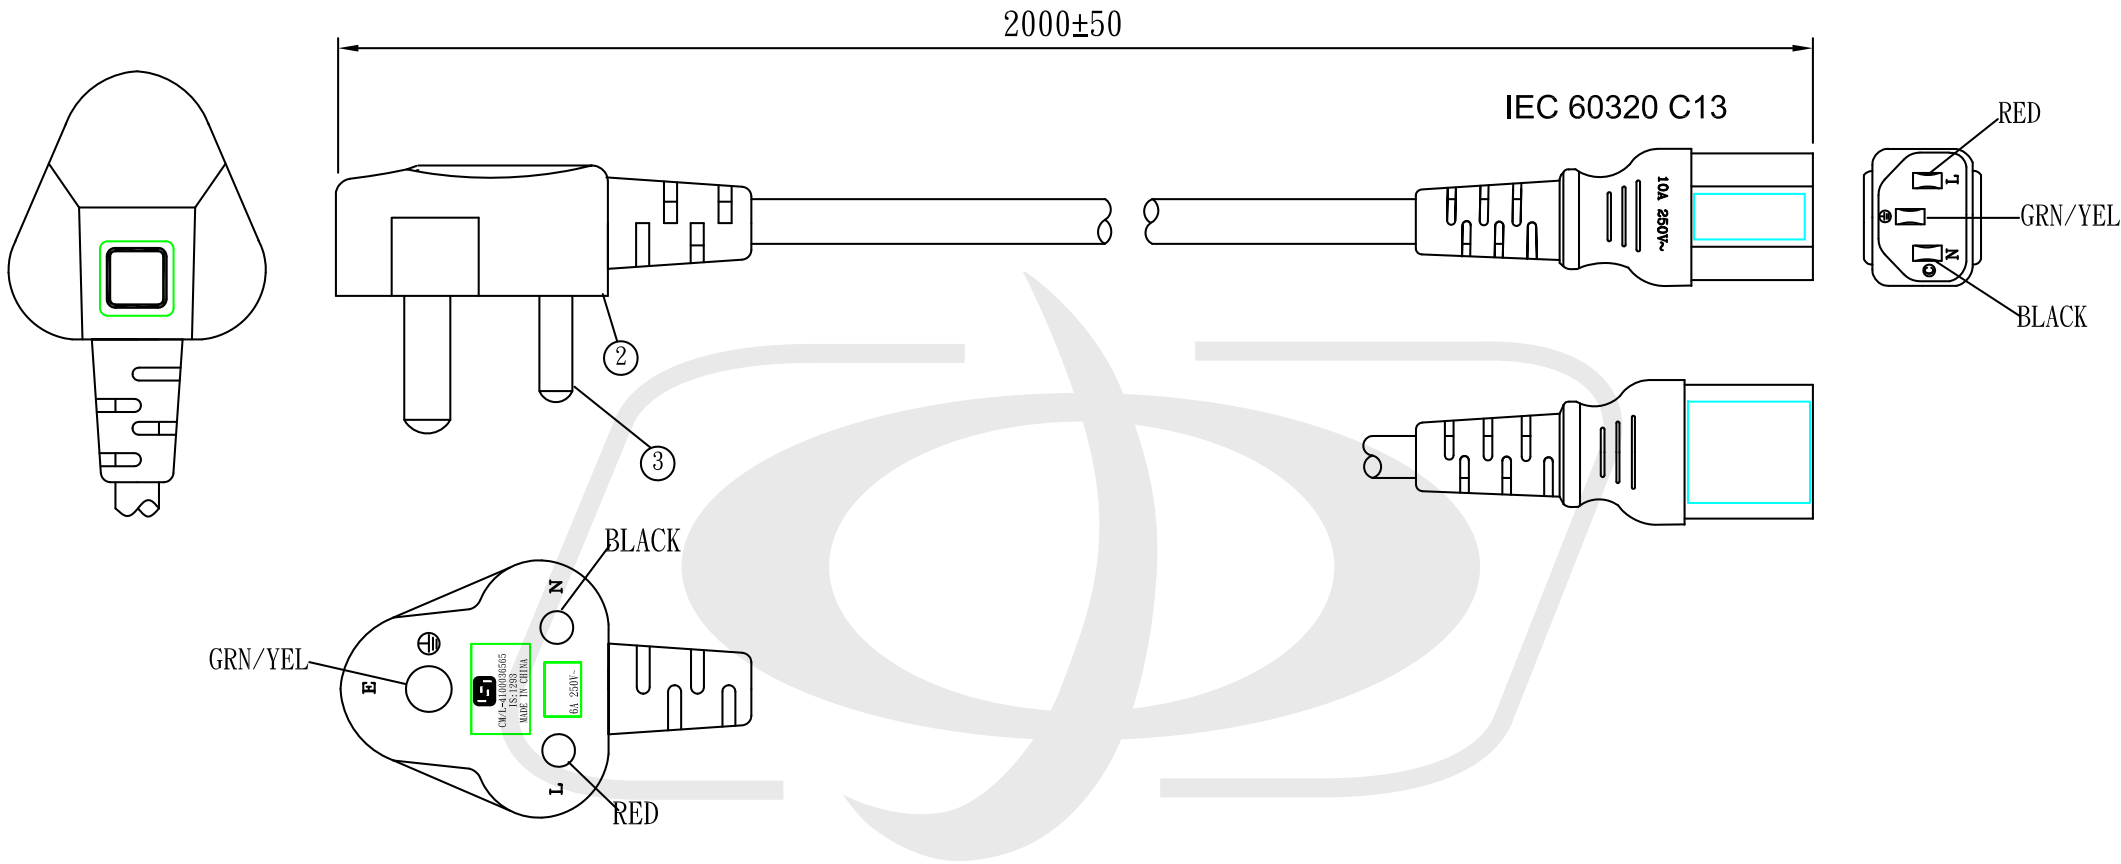

Tolerance


>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0


Angle: ±1°

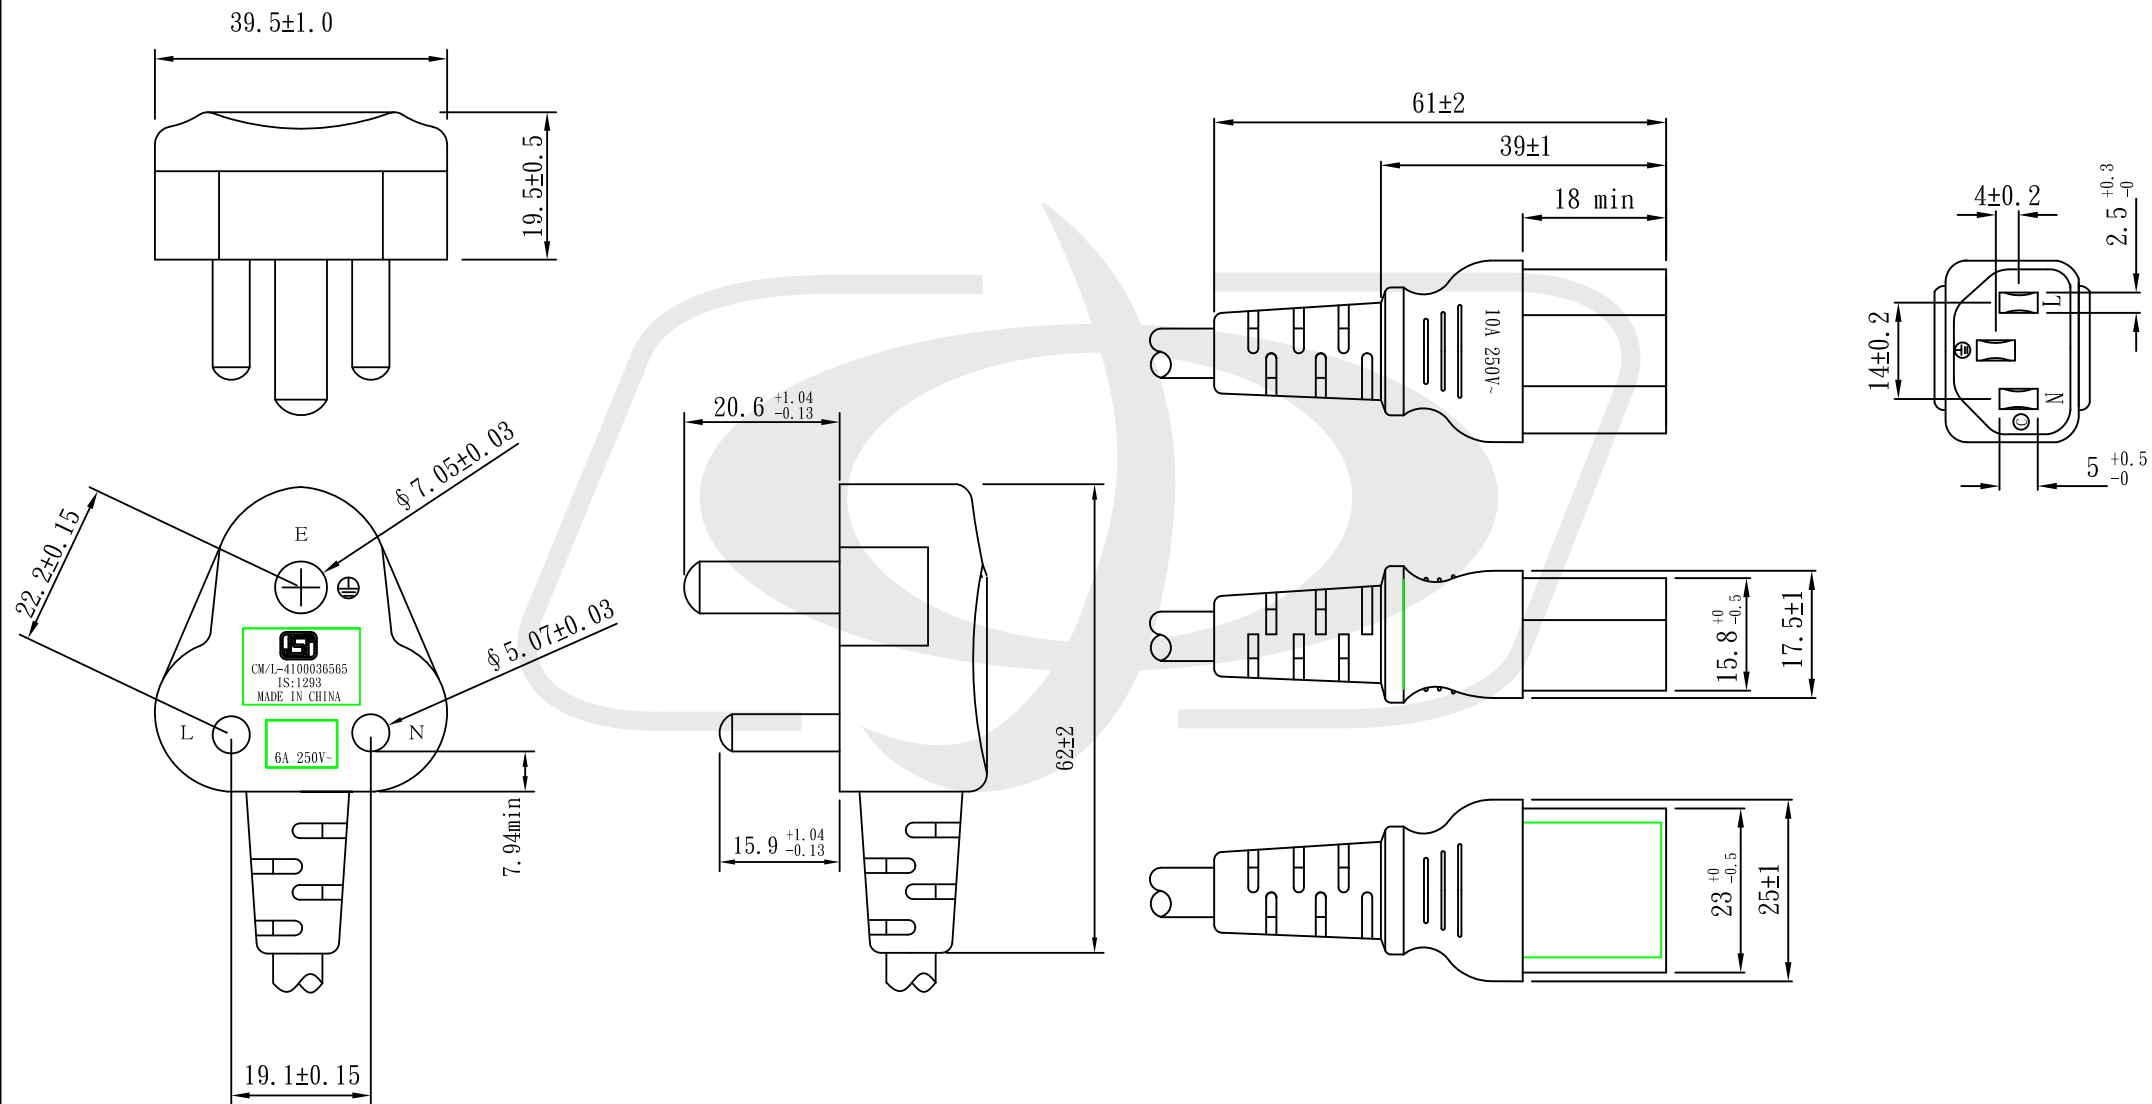



2m BS546 (India) to IEC C13 Power Cord

PW-618-2M - Packaging Information

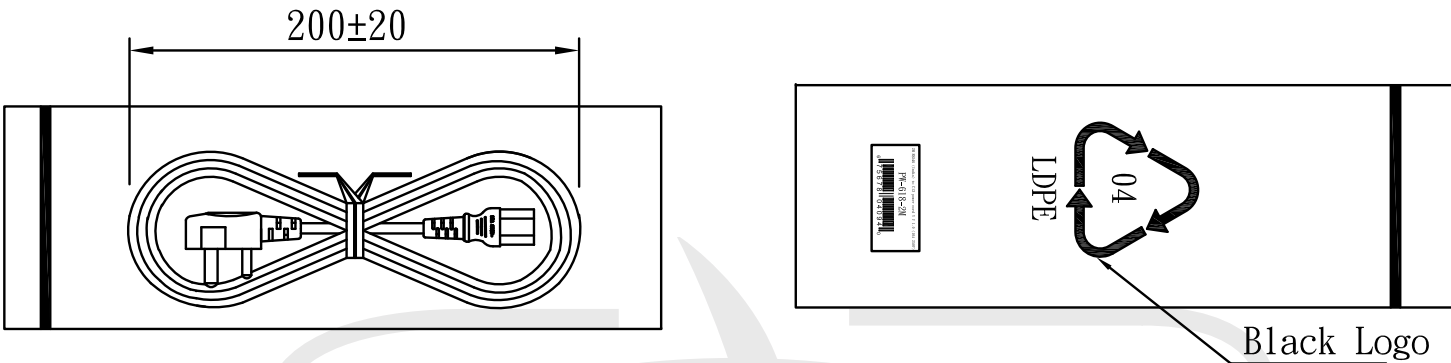

THE INDIVIDUALLY PACKED CORDS WILL
BE PACKED IN BAGS OF 10 PIECES

