



NEMA 5-15P to IEC C13 Left Angle Power Cable - 18AWG

PWC-105L3-xx - Specifications

Description

This power cord consists of a 5-15P male on one end and a C13 left angle female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors Available	Black
Lengths Available	3ft / 6ft / 12ft
Number of Conductors	3 Conductor
Wire Gauge	18 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1, FT2
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	IEC 60320 C13 Left Angle
Connector B	NEMA 5-15P

Performance

Power Rating	10 Amp / 125 Volt
--------------	-------------------



Approvals / Environmental

C13	c(UL)us
5-15P	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------



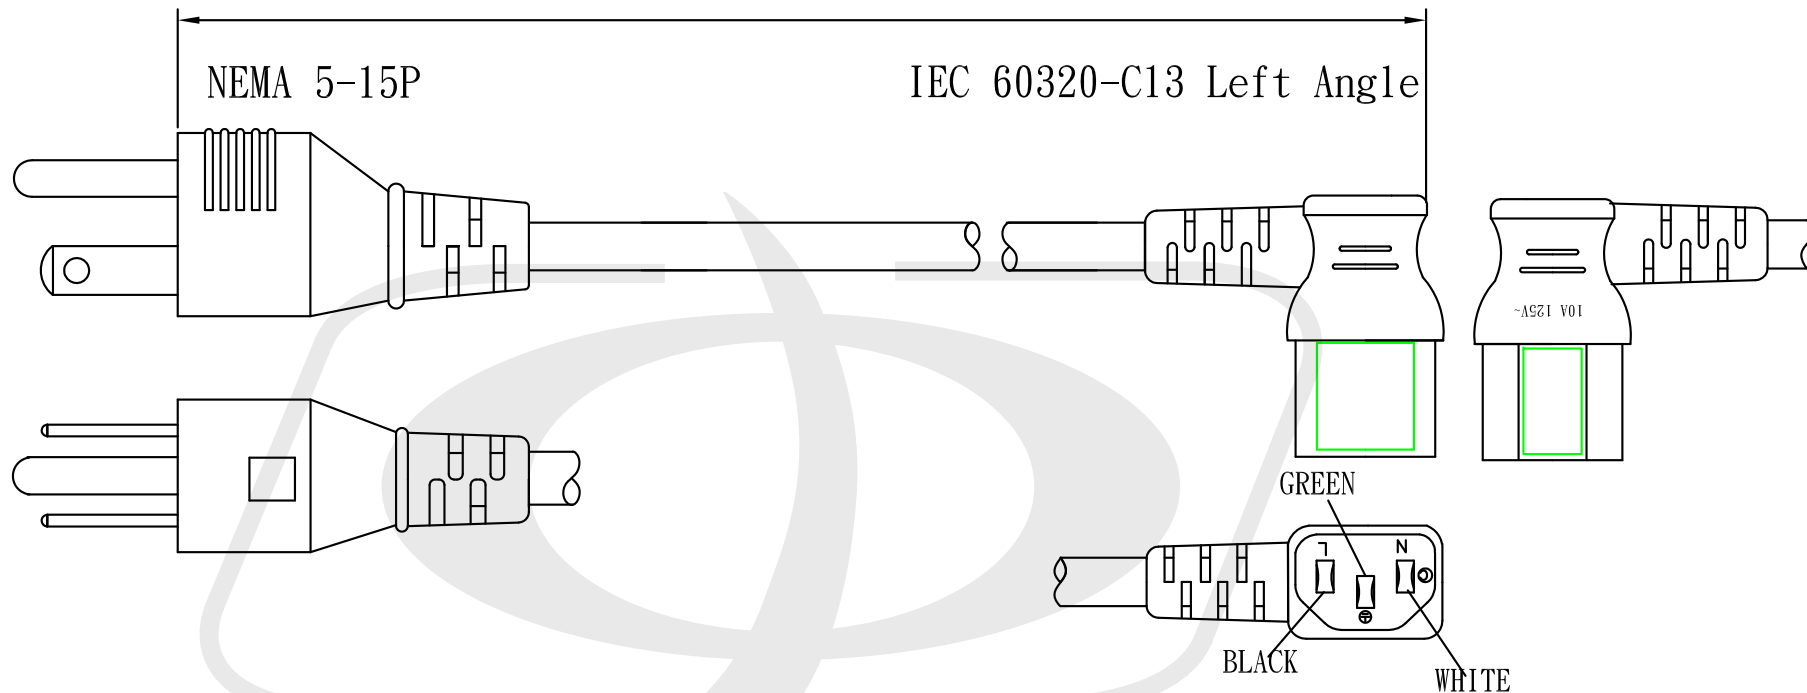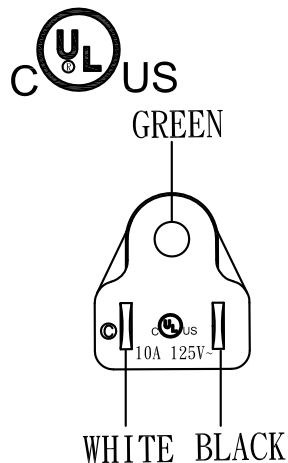

MARKING:

c(UL)us E241374 SJT 3/C 18AWG(0.824mm²) 105°C 300V VW-1

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0



>20.0±2.0

Angle: ±1°



NEMA 5-15P to IEC C13 Left Angle Power Cable - 18AWG

PWC-105L3-xx - Packaging Information

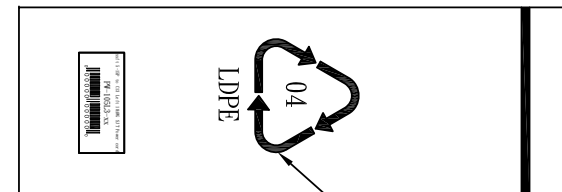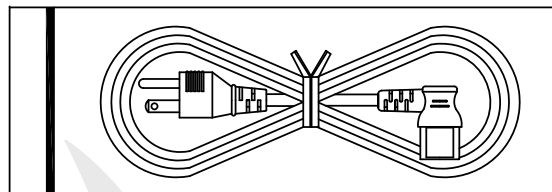

Black Logo

THE INDIVIDUALLY PACKED CORDS WILL BE PACKED IN BAGS OF 10 PIECES

P/N	LENGTH(Lmm)	UPC
PWC-105L3-03	915mm	675678001620
PWC-105L3-06	1830mm	675678001637
PWC-105L3-12	3660mm	675678001644

