

## **NEMA 5-15R to IEC C14 Power Cable - 16AWG**

PWC-106B-xx - Specifications

### **Description**

This power cord consists of a C14 male on one end and a 5-15R female on the other end. It is typically used as an extension cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

#### **Physical Characteristics**

Colors Available Black

Lengths Available 1ft / 3ft / 6ft

Number of Conductors 3 Conductor

Wire Gauge 16 AWG

Jacket Heavy Duty SJT

Jacket Material 100% Virgin PVC - Polyvinyl Chloride

Jacket Fire Rating VW-1

Strain Relief Molded 100% Virgin PVC

Conductor Material 100% bare copper

Temperature Rating -20 deg C to 105 deg C

Connector(s)

Connector A NEMA 5-15R IEC

Connector B 60320 C14

**Performance** 

Power Rating 13 Amp / 125 Volt

**Approvals / Product Support** 

Cable c(UL)us

ISO ISO 9001:2015, ISO 14000

RoHS, Reach Yes

Conflict Minerals Yes

Country of Origin Vietnam

**Warranty Information** 

Warranty Limited Lifetime



1ft 3ft 6ft


0.24 lbs 0.49 lbs 0.70 lbs





## NEMA 5-15R to IEC C14 Power Cable - 16AWG

PWC-106B-xx - Line Drawing

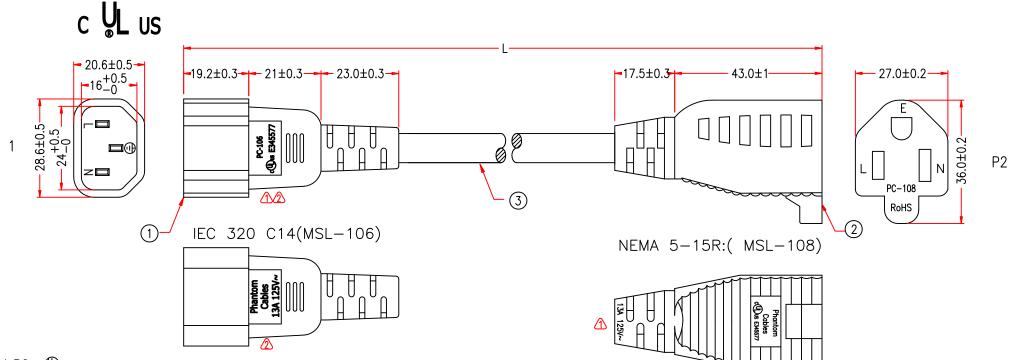

P1,P2: Dus E345577

\*NOTE: All relevant materials are complied with RoHS directive .

THE CABLE MARKING IS CONCAVE LETTERING MOULD

### CABLE MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 16AWG(1.31mm²) 105°C 300V VW-1

	P1	P2
WHITE	L N E	N


Cable Length Unless Other Spec. Tolerances:

0 ~200mm	±10mm	
201~1000mm	±20mm	
1001 ~1500mm	±25mm	
1501~2100mm	±30mm	
2100mm <b>↑</b>	±40mm	



# **NEMA 5-15R to IEC C14 Power Cable - 16AWG**

PWC-106B-xx - Packaging Information

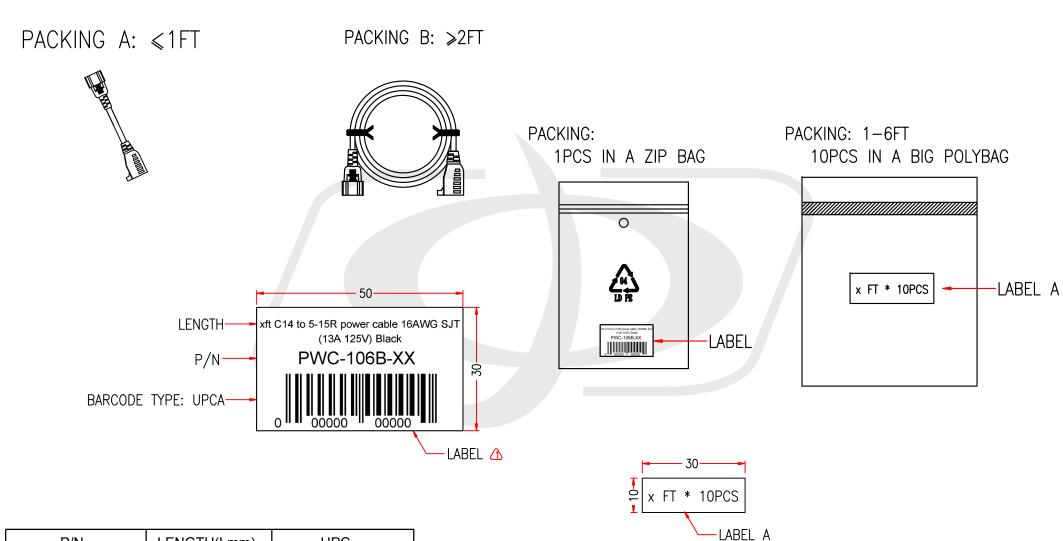

P/N	LENGTH(LMM)	UPC
PWC-106B-01	305mm	675678055302
PWC-106B-03	915mm	675678055319
PWC-106B-06	1830mm	675678055326

\*NOTE: All relevant materials are complied with RoHS directive .