



NEMA 5-15P to 5-15R Power Cable - 16AWG

PWC-110B-xx - Specifications

Description

This power cord consists of a 5-15P male on one end and a 5-15R female on the other end. It is typically used as an extension cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Lengths Available	1ft / 3ft / 6ft / 10ft / 15ft / 25ft
Number of Conductors	3 Conductor
Wire Gauge	16 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	-20 deg C to 105 deg C
Temperature Rating	100% bare copper

Connector(s)

Connector A	NEMA 5-15R
Connector B	NEMA 5-15P

Performance

Power Rating	13 Amp / 125 Volt
--------------	-------------------

Approvals / Product Support

5-15R	c(UL)us
5-15P	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS, Reach	Yes
Conflict Minerals	Yes
Country of Origin	Vietnam

Warranty Information


Warranty	Limited Lifetime
----------	------------------





NEMA 5-15P to 5-15R Power Cable - 16AWG

PWC-110B-xx - Line Drawing

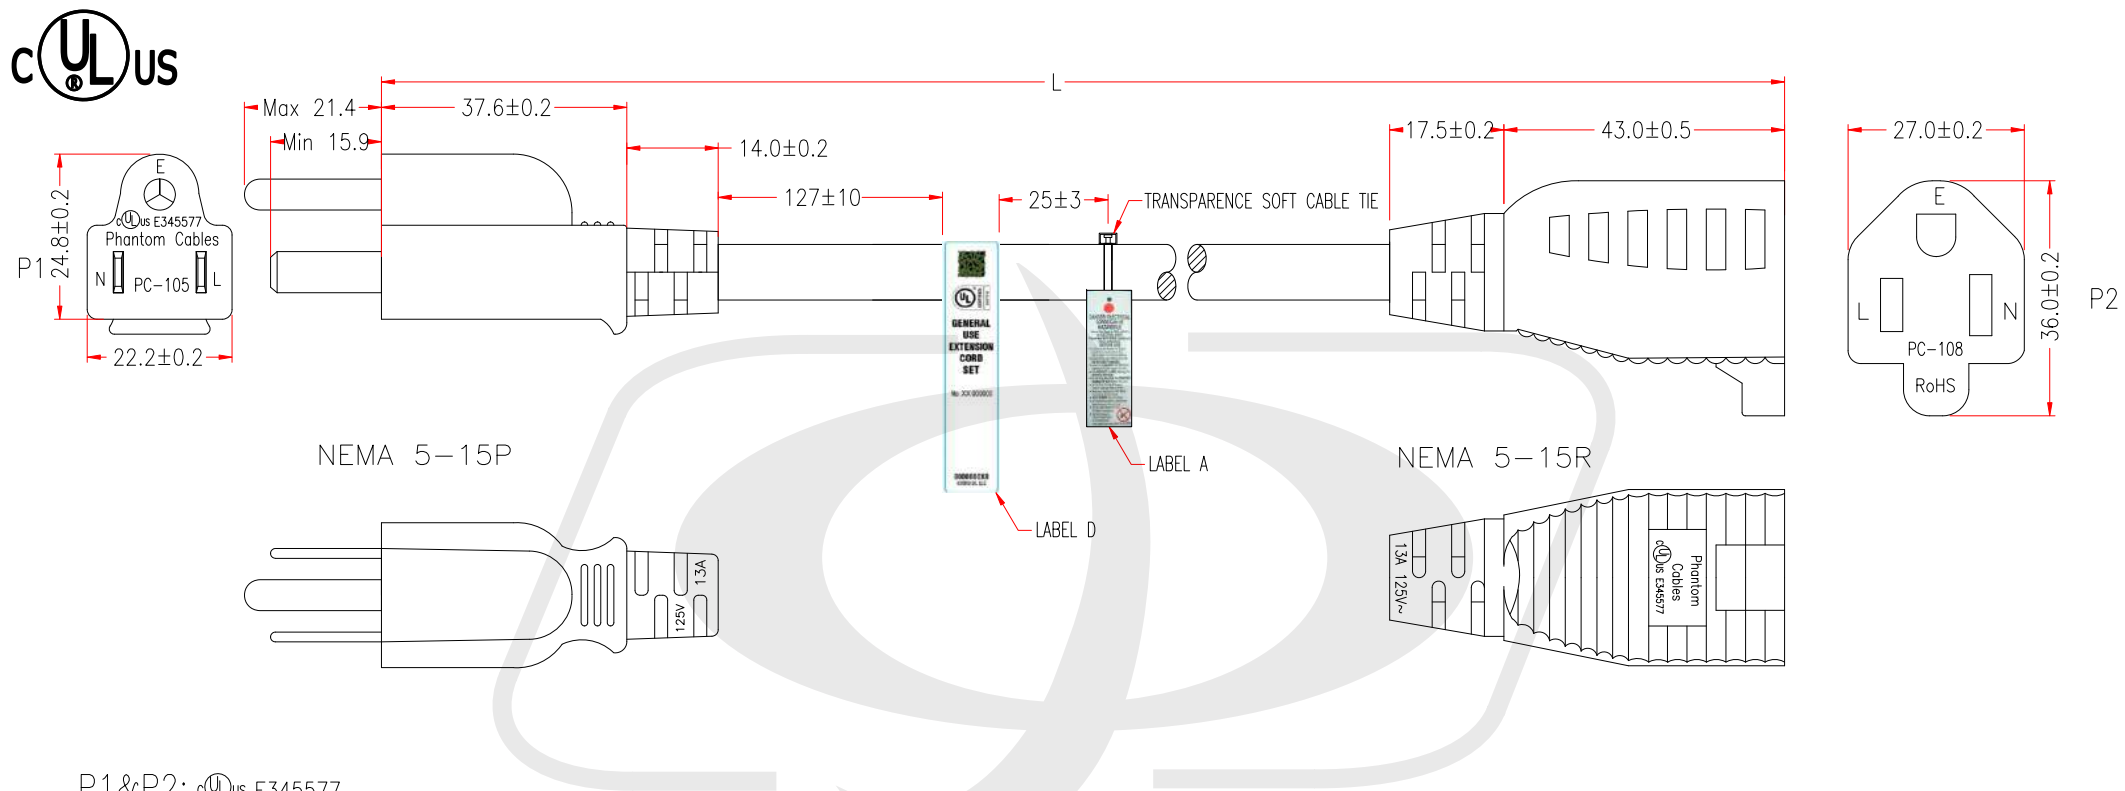

P1&P2: c(UL)us E345577

CABLE MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 16AWG(1.31mm²) 105°C 300V VW-1

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E



THE CABLE MARKING IS CONCAVE LETTERING MOULD
 LABEL A IS "WARNING LABEL"
 LABEL D IS "UL LABEL"

Cable Length
 Unless Other Spec.
 Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm



PACKING A: $\leq 1\text{FT}$

PACKING B: $\geq 2\text{FT}$



PACKING:
1PCS IN A ZIP BAG

PACKING: 1-6FT
10PCS IN A BIG POLYBAG

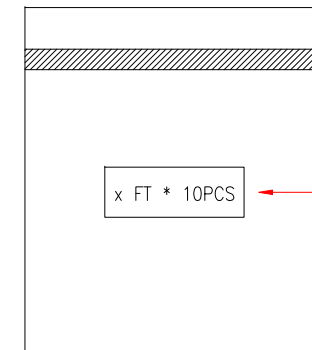


P/N	LENGTH(Lmm)	UPC
PWC-110B-01	305mm	675678055333
PWC-110B-03	915mm	675678055340
PWC-110B-06	1830mm	675678055357
PWC-110B-10	3048mm	675678055364
PWC-110B-15	4572mm	675678055371
PWC-110B-25	7620mm	675678055388

1FT :

3FT :

6FT :

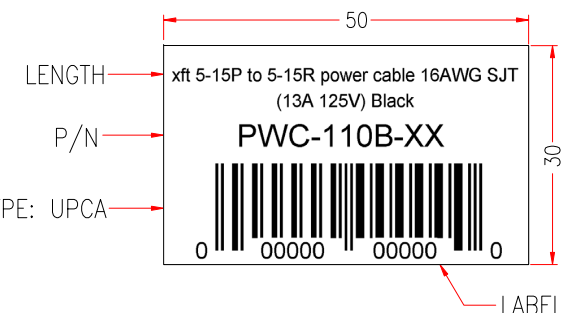

*NOTE: All relevant materials are complied with RoHS directive .