



# IEC C14 to IEC C7 Power Cable - 18AWG

PWC-117-xx - Specifications

## Description

This power cord consists of a C14 male on one end and a C7 female on the other end. It is typically used to connect a server to a PDU in a data center environment. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

## Physical Characteristics

Color	Black
Lengths Available	3ft / 6ft / 12ft
Number of Conductors	2 Conductor
Wire Gauge	18 AWG
Jacket Jacket	Heavy Duty SPT-2
Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

## Connector(s)

Connector A	IEC 60320 C7
Connector B	IEC 60320 C14

## Performance

Power Rating	7 Amp / 125 Volt
--------------	------------------


## Approvals / Product Support

ISO	ISO 9001:2015, ISO 14000
RoHS, Reach	Yes
Conflict Minerals	Yes
Country of Origin	Vietnam

## Warranty Information

Warranty	Limited Lifetime
----------	------------------



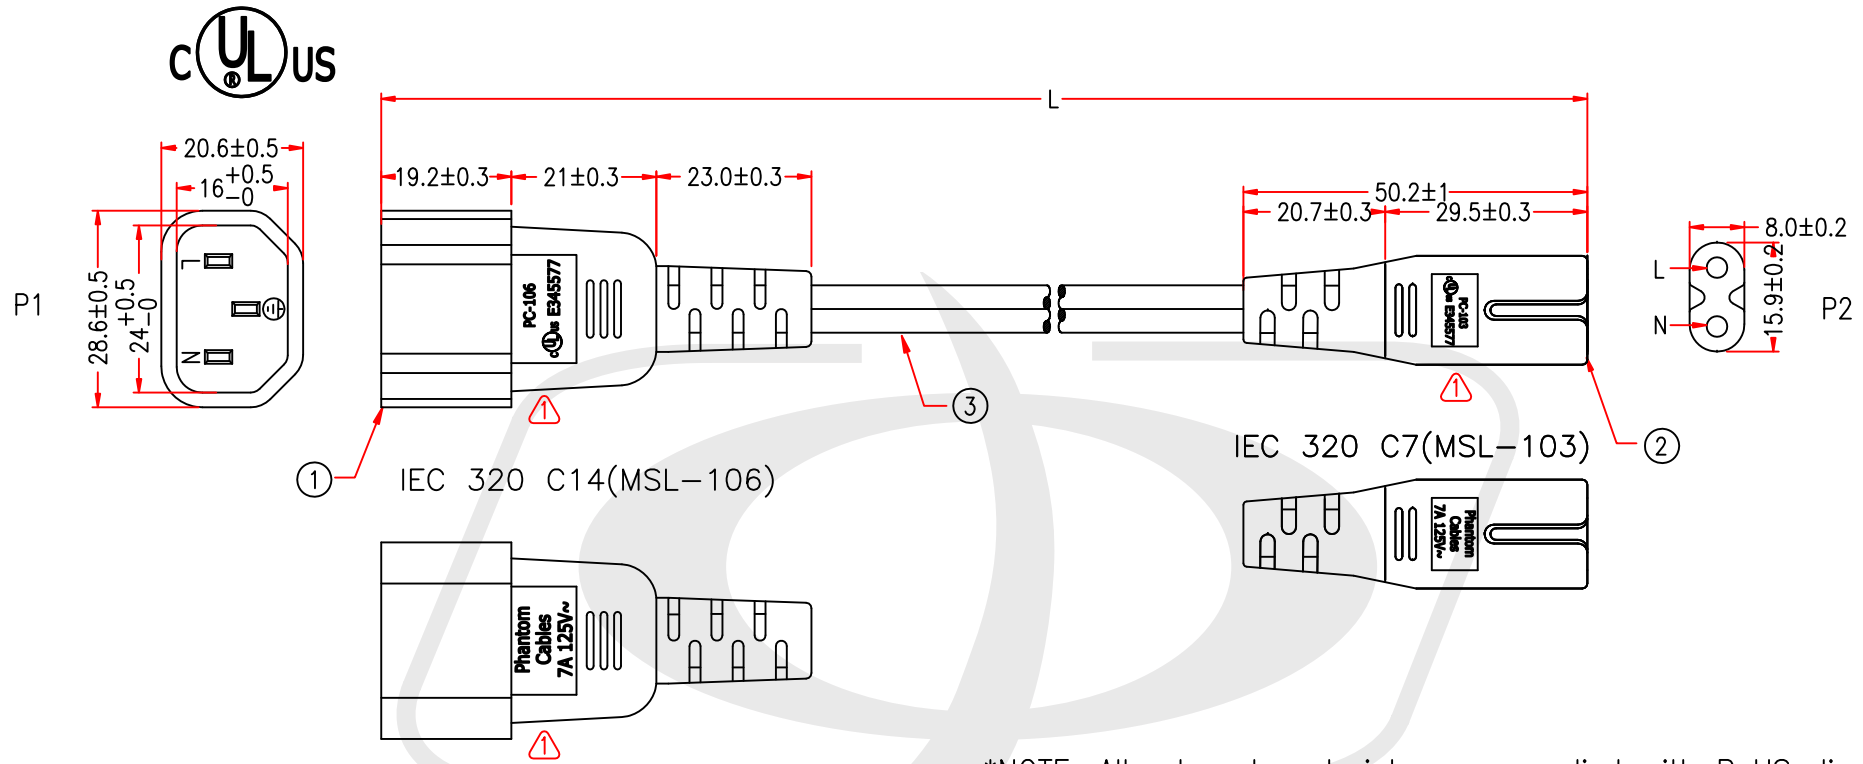


P1&P2: cULus E345577

CABLE MARKING:

Phantom Cables c(UL)us E345578 SPT-2 2/C 18AWG(0.824mm<sup>2</sup>) 105°C 300V VW-1

\*NOTE: All relevant materials are complied with RoHS directive .  
THE CABLE MARKING IS CONCAVE LETTERING MOULD

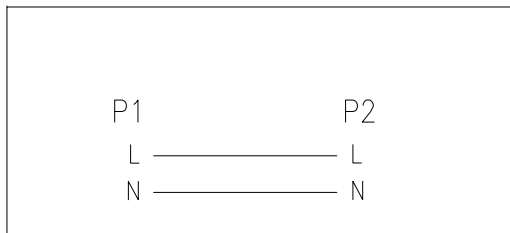

THE CABLE MARKING IS CONCAVE LETTERING MOULD



Cable Length  
Unless Other Spec.

Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm


PACKING A:  $\leq 1\text{FT}$

PACKING B:  $\geq 2\text{FT}$




P/N	LENGTH(Lmm)	UPC
PWC-117-03	915mm	675678060283
PWC-117-06	1830mm	675678060290
PWC-117-12	3655mm	675678060306

PACKING:  
1PCS IN A ZIP BAG




LABEL

PACKING: 1-10FT  
10PCS IN A BIG POLYBAG

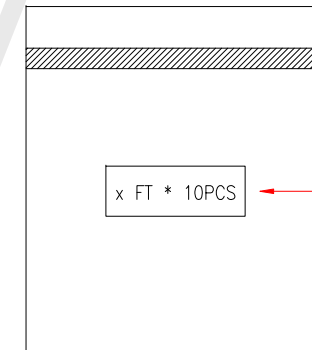

LABEL A



LABEL A

BARCODE TYPE: UPCA

BARCODE CONTENT SEE LIST



\*NOTE: All relevant materials are complied with RoHS directive .