



12ft IEC C19 Right Angle to IEC C20 Power Cable - 12AWG (20A 250V)

PWC-125R9-12 - Specifications

Description

This power cord consists of a C20 male on one end and a C19 right angle female on the other end. It is typically used to connect a server to a PDU in a data center environment. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	12 foot [3.6m]
Number of Conductors	3 Conductor
Wire Gauge	12 AWG
Jacket	Heavy Duty
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	IEC 60320 C19 Right Angle
Connector B	IEC 60320 C20

Performance

Power Rating	20 Amp / 250 Volt
--------------	-------------------

Approvals / Environmental

C19	c(UL)us
C20	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------


Packaging Information

Package Quantity	1
Product Weight	1.88 lbs [0.8kg]



12ft IEC C19 Right Angle to IEC C20 Power Cable - 12AWG (20A 250V)

PWC-125R9-12 - Line Drawing

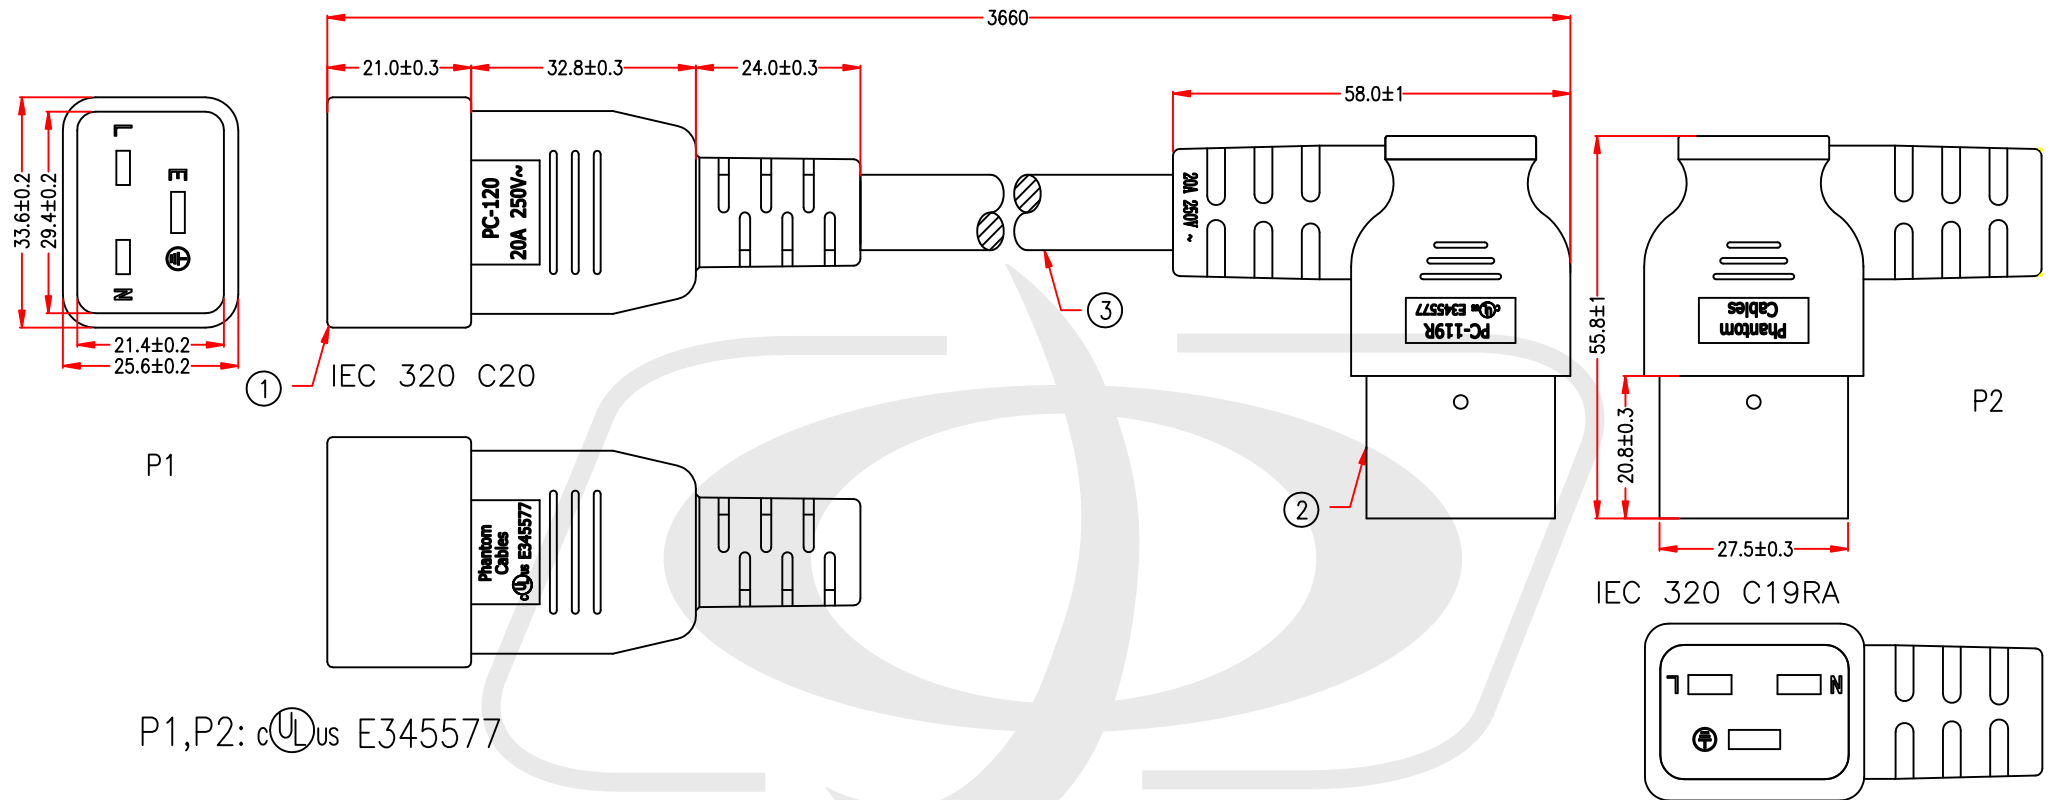

NOTE: All relevant materials are complied with RoHS directive .

THE MARKING IS CONCAVE LETTERING MOULD

Phantom Cables c(UL)us E345578 SJT 3/C 12AWG(3.31mm²) 105°C 300V VW-1

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

Tolerance

>0±0.30

>1.0±0.50


>10.0±1.0

>20.0±2.0

Angle: ±1°

PACKING :

PACKING:
1PCS IN A ZIP BAG

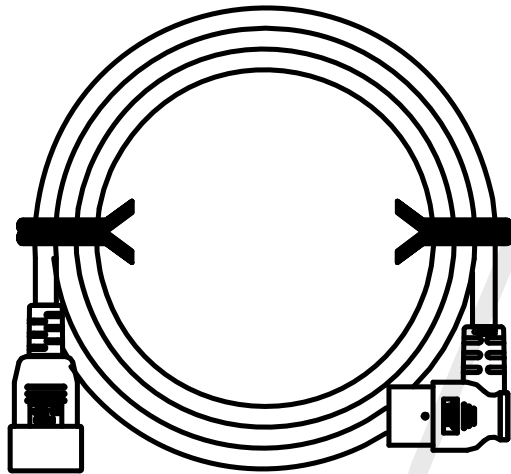


LABEL

LENGTH

P/N

BARCODE TYPE: UPCA

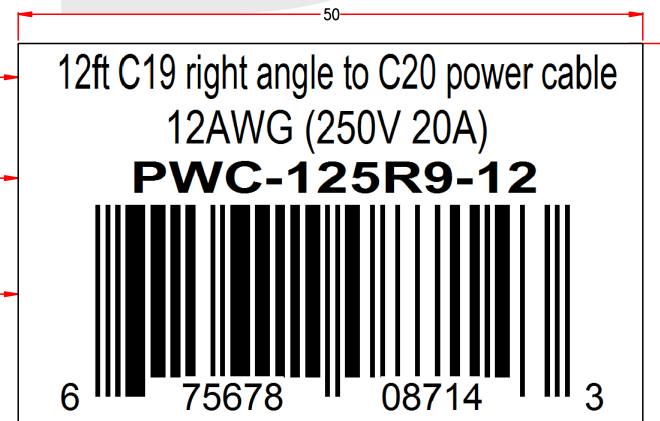

LABEL