



NEMA L5-20P to NEMA 5-20R Power Cable - 12AWG SJ (20A 125V)

PWC-129-xx - Specifications

Description

This power cord consists of a L5-20P male on one end and a 5-20R female on the other end. It is typically used as an extension cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Cable Length	1 foot [0.3m]
Color	Black
Number of Conductors Wire	3 Conductor
Gauge	12 AWG
Jacket	Heavy duty SJ
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2 / VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	NEMA L5-20P
Connector B	NEMA 5-15R/5-20R T-Slot

Performance

Power Rating	20 Amp / 125 Volt
--------------	-------------------

Approvals

L5-20P	c(UL)us
5-20R	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000

Environmental


RoHS	Yes
Reach	Yes
Conflict Minerals	Yes


Packaging Information

Package Quantity	1
Product Weight	0.35 lbs [0.1kg]

Warranty Information

Warranty	Limited Lifetime
----------	------------------

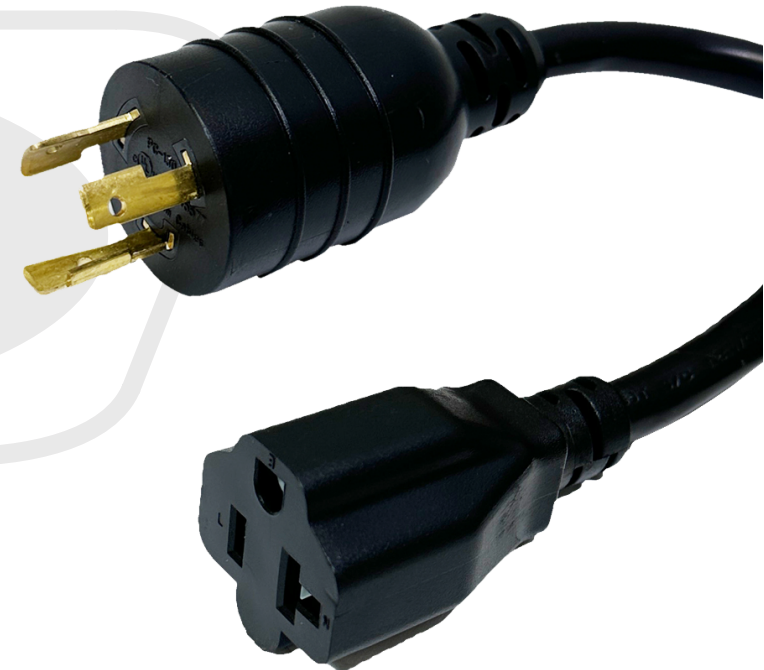

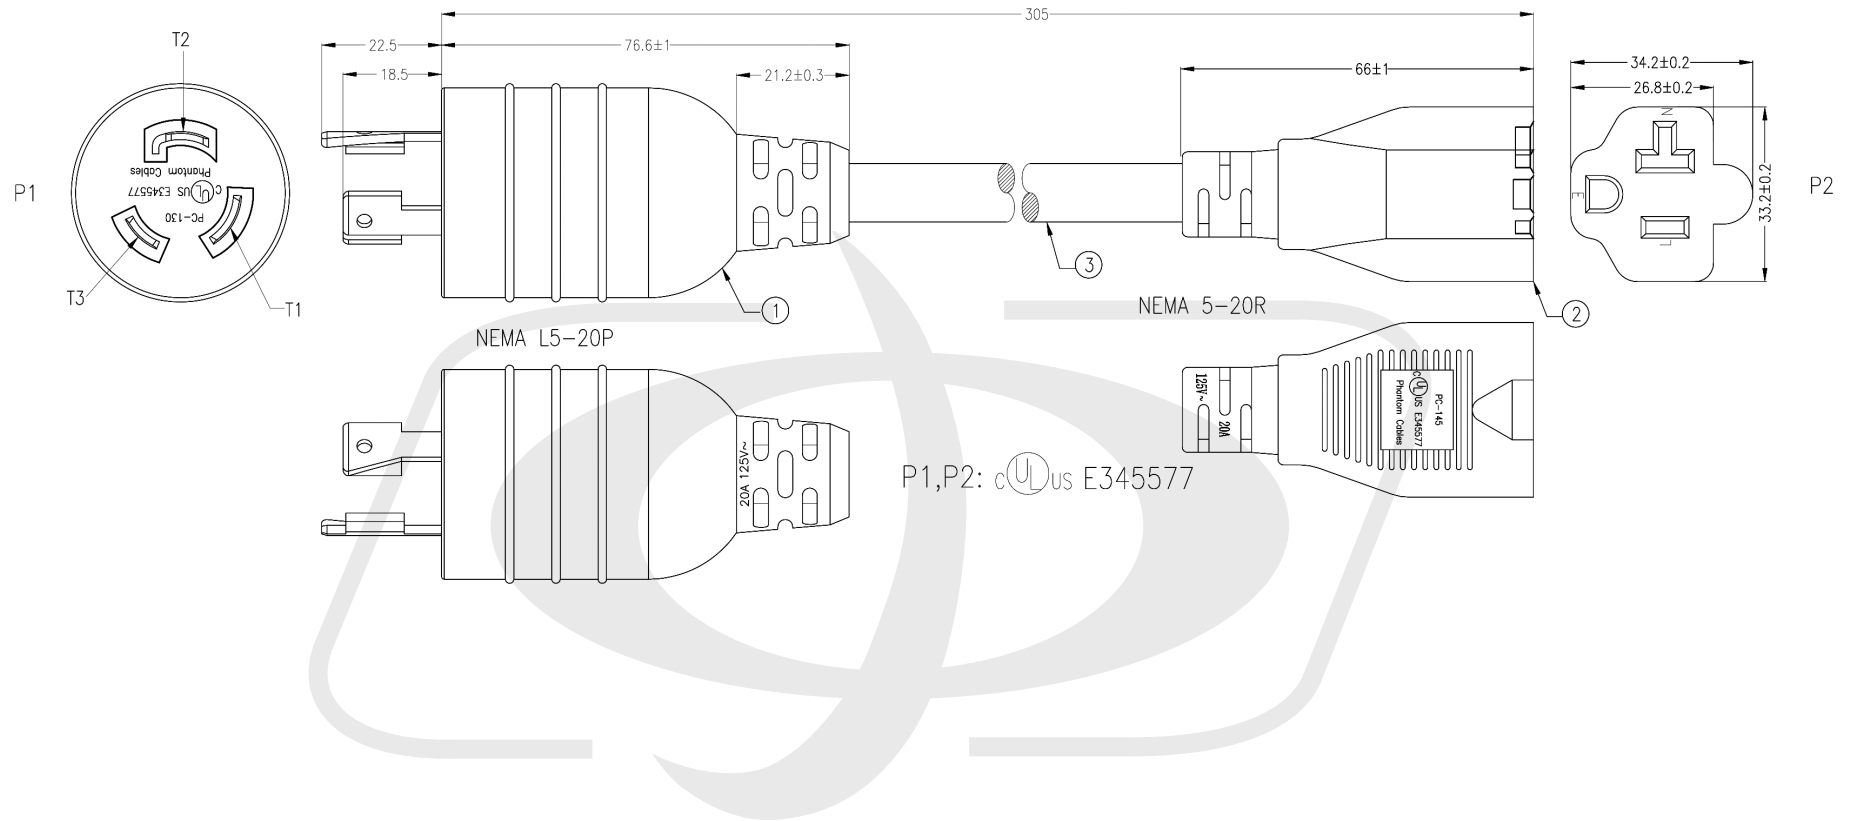

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 12AWG(3.31mm²) 105°C 300V VW-1


	P1		P2
BLACK	T1	_____	L
WHITE	T3	_____	N
GREEN	T2	_____	E





NEMA L5-20P to NEMA 5-20R Power Cable - 12AWG SJ (20A 125V)

PWC-129-xx - Specifications

PACKING:
1PCS IN A ZIP BAG



PACKING:
10PCS IN A BIG POLYBAG

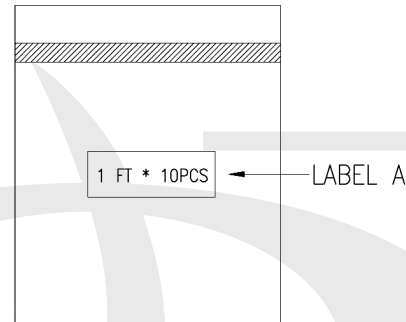

PACKING :

