



# NEMA L5-20P to IEC C13 Power Cable - 14AWG

PWC-133-xx - Specifications

## Description

This power cord consists of a L5-20P male on one end and a C13 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

## Physical Characteristics

|                      |                                      |
|----------------------|--------------------------------------|
| Color                | Black                                |
| Lengths Available    | 3ft / 6ft / 15ft                     |
| Number of Conductors | 3 Conductor                          |
| Wire Gauge           | 14 AWG                               |
| Jacket               | Heavy Duty SJT                       |
| Material             | 100% Virgin PVC - Polyvinyl Chloride |
| Jacket Fire Rating   | VW-1                                 |
| Strain Relief        | Molded 100% Virgin PVC               |
| Conductor Material   | 100% bare copper                     |
| Temperature Rating   | -20 deg C to 105 deg C               |

## Connector(s)

|             |               |
|-------------|---------------|
| Connector A | IEC 60320 C13 |
| Connector B | NEMA L5-20P   |

## Performance

|              |                   |
|--------------|-------------------|
| Power Rating | 15 Amp / 125 Volt |
|--------------|-------------------|


## Approvals / Product Support

|                   |                          |
|-------------------|--------------------------|
| C13               | c(UL)us                  |
| L5-20P            | c(UL)us                  |
| Cable             | c(UL)us                  |
| ISO               | ISO 9001:2015, ISO 14000 |
| RoHS, Reach       | Yes                      |
| Conflict Minerals | Yes                      |
| Country of Origin | Vietnam                  |

## Warranty Information

|          |                  |
|----------|------------------|
| Warranty | Limited Lifetime |
|----------|------------------|



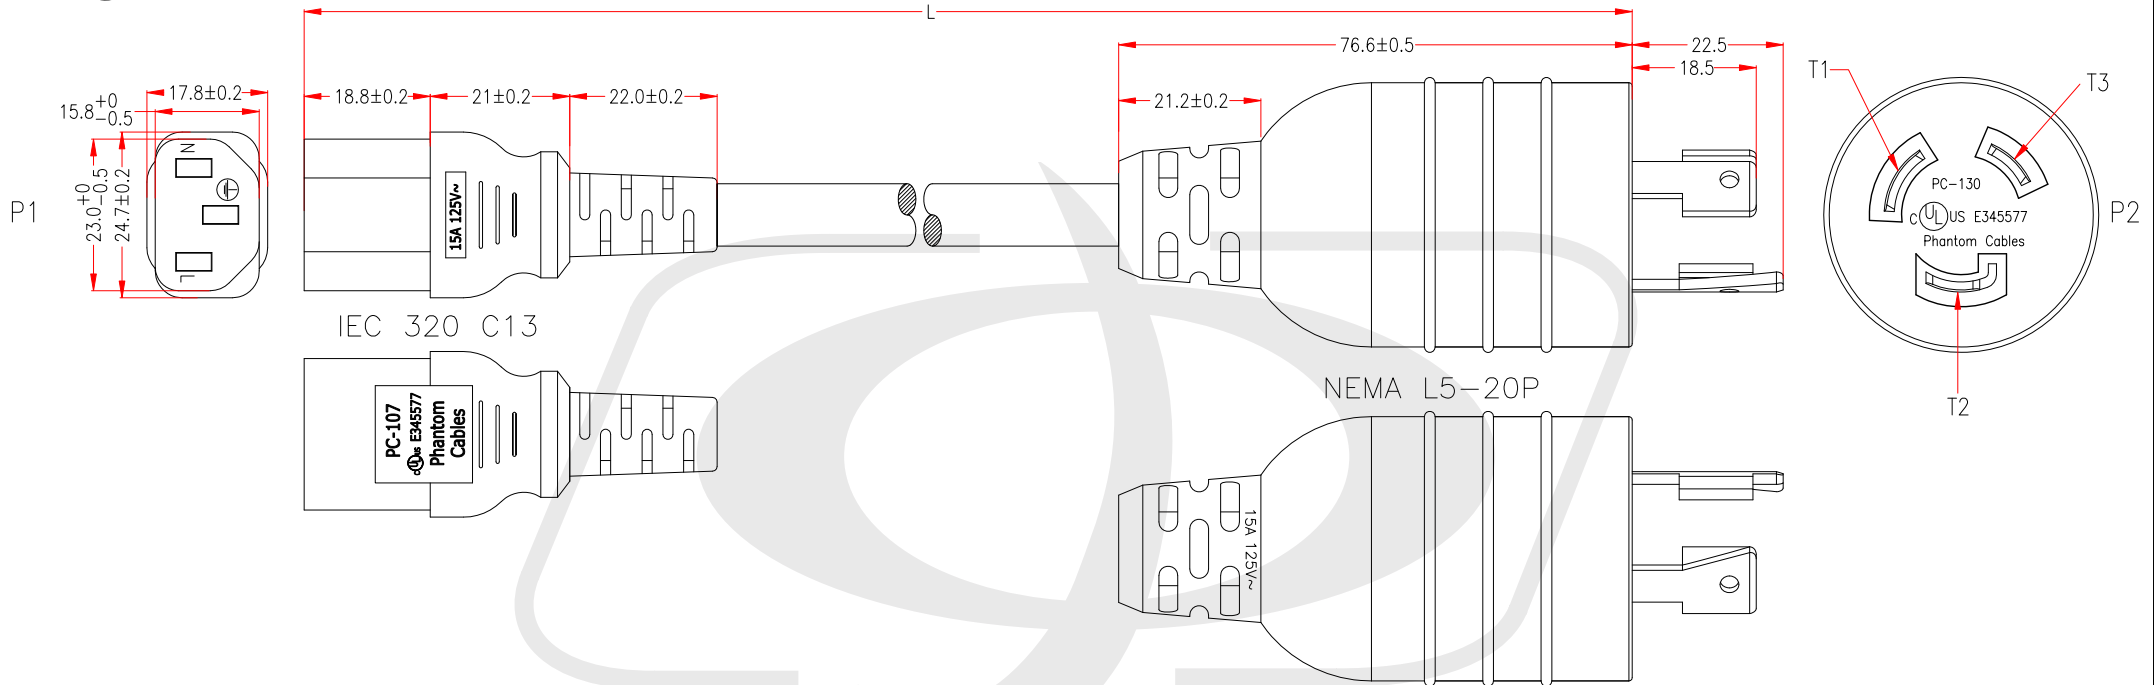

**CABLE MARKING.**

Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm<sup>2</sup>) 105°C 300V VW-1

|       | P1 | P2 |
|-------|----|----|
| BLACK | L  | T1 |
| WHITE | N  | T3 |
| GREEN | E  | T2 |

THE CABLE MARKING IS CONCAVE LETTERING MOULD



Cable Length  
Unless Other Spec.

Tolerances:

|              |       |
|--------------|-------|
| 0 ~200mm     | ±10mm |
| 201~1000mm   | ±20mm |
| 1001 ~1500mm | ±25mm |
| 1501~2100mm  | ±30mm |
| 2100mm↑      | ±40mm |


PACKING A:  $\leq 1$ FT

PACKING B:  $\geq 2$ FT




| P/N        | LENGTH(Lmm) | UPC          |
|------------|-------------|--------------|
| PWC-133-03 | 915mm       | 675678061686 |
| PWC-133-06 | 1830mm      | 675678061693 |
| PWC-133-15 | 4572mm      | 675678061709 |

PACKING:  
1PCS IN A ZIP BAG

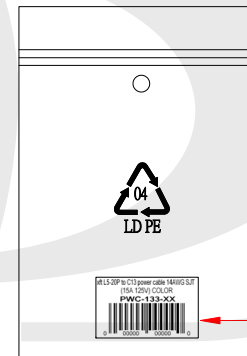


LABEL

PACKING: 1-10FT  
10PCS IN A BIG POLYBAG

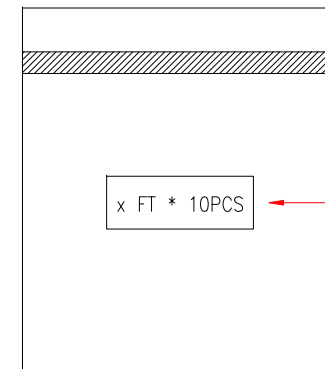


LABEL A



LABEL A

BARCODE TYPE: UPCA

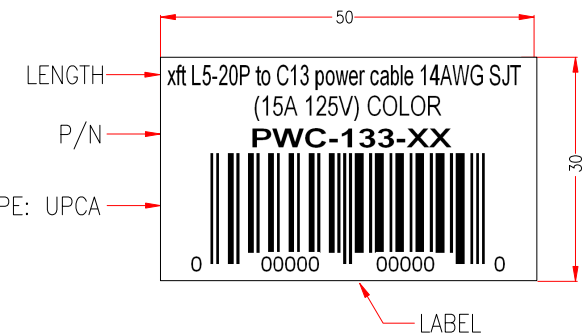

LABEL

\*NOTE: All relevant materials are complied with RoHS directive .