



NEMA 6-15P to IEC C13 Power Cable - 14AWG

PWC-135-xx - Specifications

Description

This power cord consists of a 6-15P male on one end and a C13 female on the other end. It is typically used with bitcoin mining machines, and to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Lengths Available	2ft / 3ft / 4ft / 6ft / 10ft / 12ft / 15ft
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket Jacket	Heavy Duty SJT
Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	NEMA 6-15P
Connector B	IEC 60320 C13

Performance

Power Rating	15 Amp / 250 Volt
--------------	-------------------

Approvals / Product Support

6-15P	c(UL)us
C13	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS, Reach	Yes
Conflict Minerals	Yes
Country of Origin	Vietnam

Warranty Information


Warranty	Limited Lifetime
----------	------------------





NEMA 6-15P to IEC C13 Power Cable - 14AWG

PWC-135-xx - Line Drawing

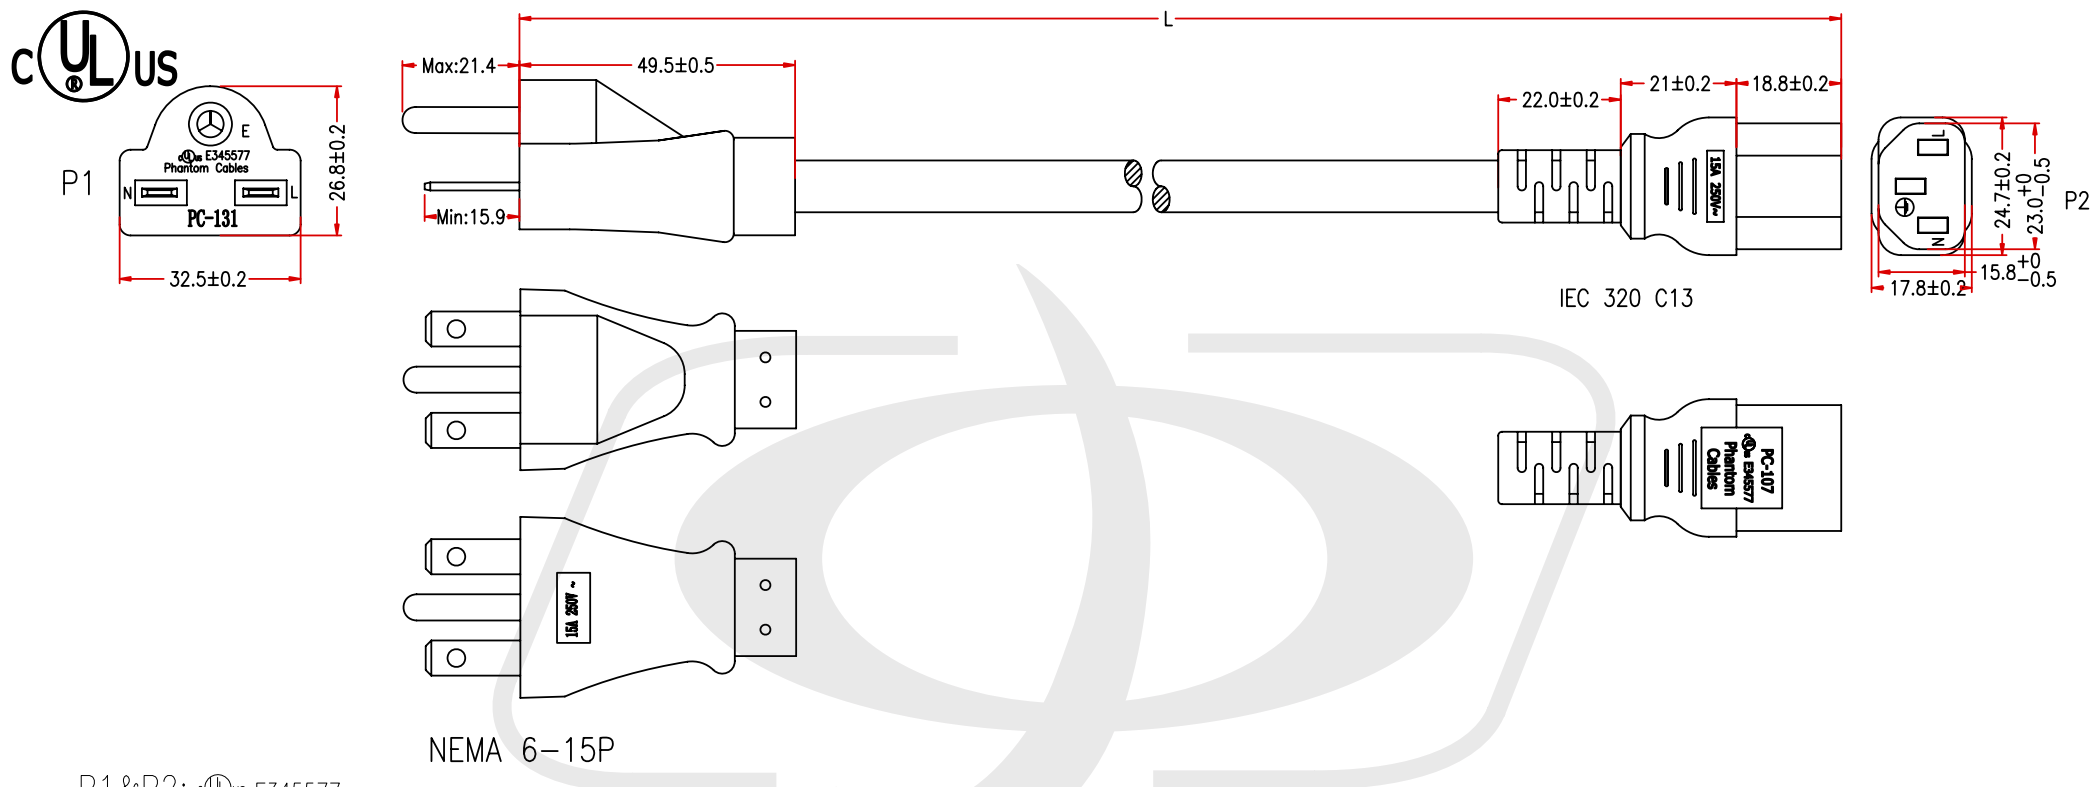

P1&P2: cULus E345577

CABLE MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm) 105°C 300V VW-1

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

THE CABLE MARKING IS CONCAVE LETTERING MOULD

Cable Length
Unless Other Spec.

Tolerances:


0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm




NEMA 6-15P to IEC C13 Power Cable - 14AWG

PWC-135-xx - Packaging Information

PACKING A: $\leq 1\text{FT}$




PACKING B: $\geq 2\text{FT}$



P/N	LENGTH(Lmm)	UPC
PWC-135-02	610mm	675678062577
PWC-135-03	915mm	675678062584
PWC-135-04	1220mm	675678062591
PWC-135-06	1830mm	675678062607
PWC-135-10	3048mm	675678062614
PWC-135-12	3658mm	675678062621
PWC-135-15	4572mm	675678062638

PACKING:


1PCS IN A ZIP BAG




LABEL

PACKING: 1-10FT


10PCS IN A BIG POLYBAG

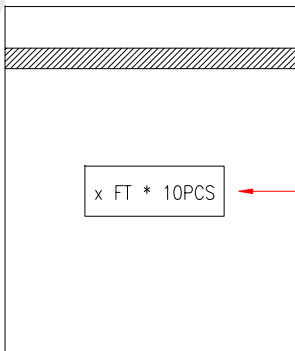

LABEL A



LABEL A

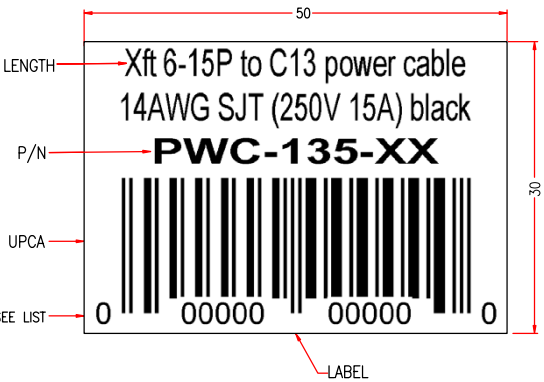

BARCODE TYPE: UPCA

BARCODE CONTENT SEE LIST

*NOTE: All relevant materials are complied with RoHS directive .