



NEMA 6-15P to IEC C19 Power Cable - SJT - 14AWG

PWC-1352-xx - Specifications

Description

This power cord consists of a 6-15P male on one end and a C19 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Lengths Available	3ft / 6ft / 12ft
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket Jacket	Heavy Duty SJT
Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	NEMA 6-15P
Connector B	IEC C19

Performance


Power Rating	15 Amp / 250 Volt
--------------	-------------------

Approvals / Product Support

6-15P	c(UL)us
C19	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS, Reach	Yes
Conflict Minerals	Yes
Country of Origin	Vietnam

Warranty Information


Warranty	Limited Lifetime
----------	------------------

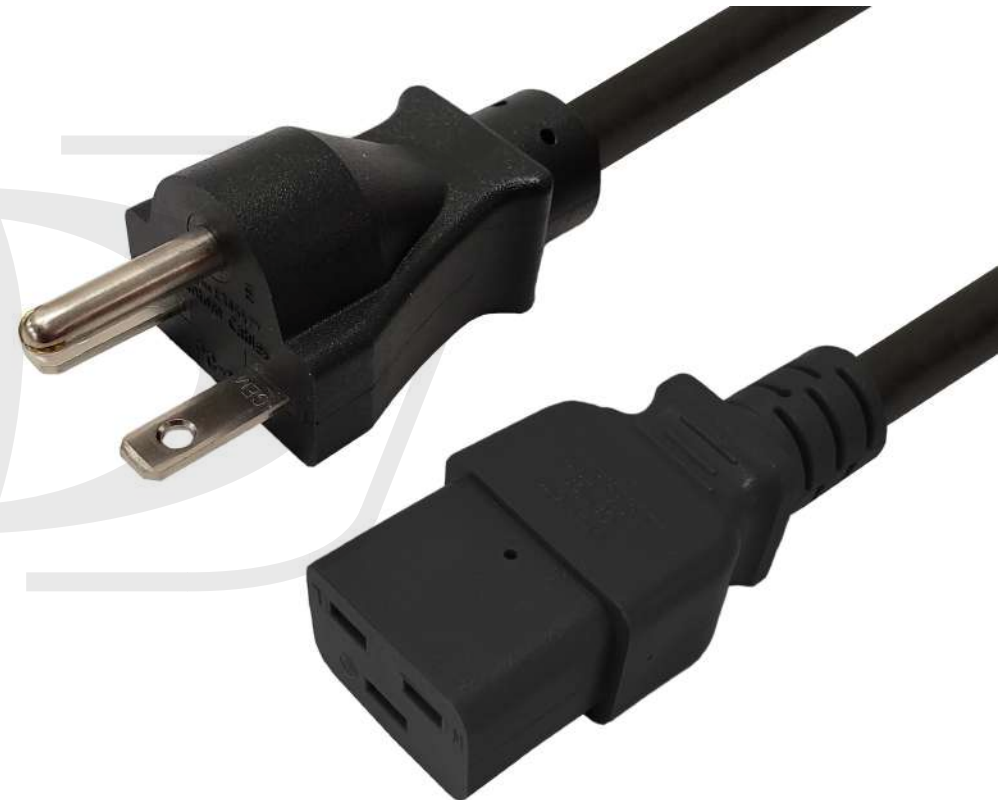



NEMA 6-15P to IEC C19 Power Cable - SJT - 14AWG

PWC-1352-xx - Line Drawing

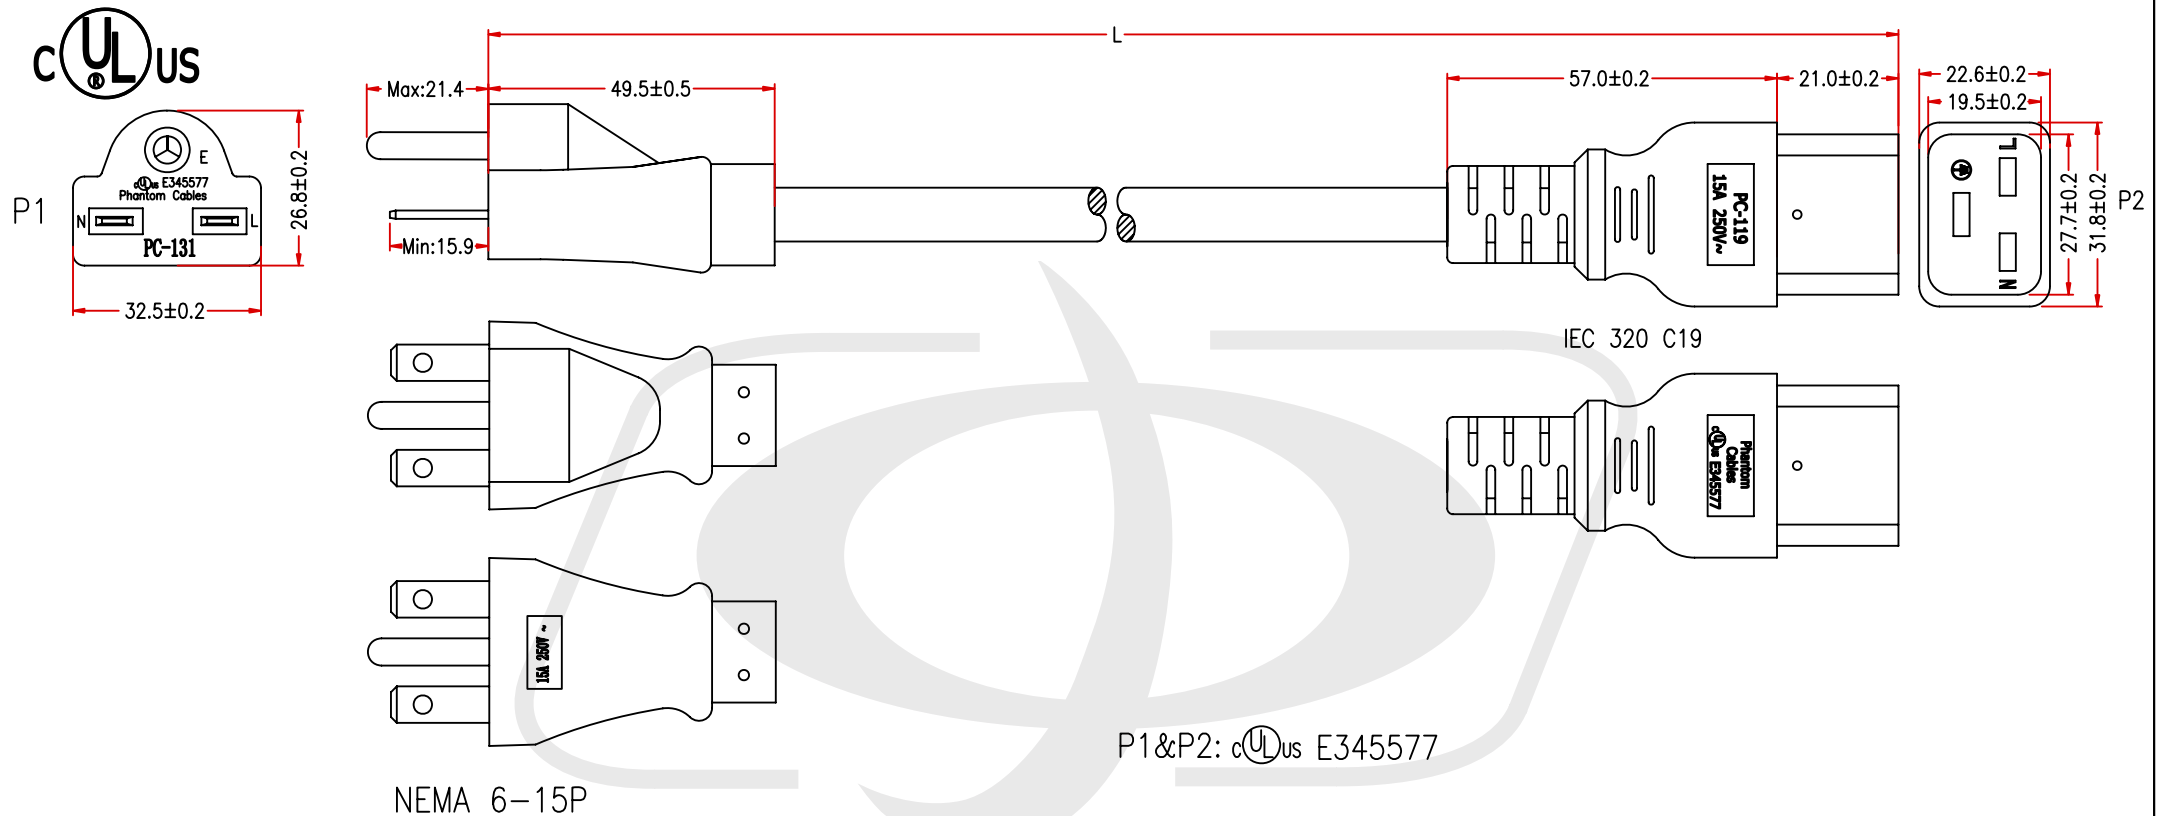

Phantom Cables c(UL)_{us} E345578 SJT 3/C 14AWG(2.08mm²) 105°C 300V VW-1

	P1		P2
BLACK	L	—————	L
WHITE	N	—————	N
GREEN	E	—————	E

THE CABLE MARKING IS CONCAVE LETTERING MOULD

Cable Length
Unless Other Spec.

Tolerances:


0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm




NEMA 6-15P to IEC C19 Power Cable - SJT - 14AWG

PWC-1352-xx - Packaging Information

PACKING A: $\leq 1\text{FT}$




PACKING B: $\geq 2\text{FT}$




P/N	LENGTH(Lmm)	UPC
PWC-1352-03	915mm	675678062676
PWC-1352-06	1830mm	675678062683
PWC-1352-12	3658mm	675678062690

PACKING:
1PCS IN A ZIP BAG




LABEL


PACKING: 1-10FT
10PCS IN A BIG POLYBAG

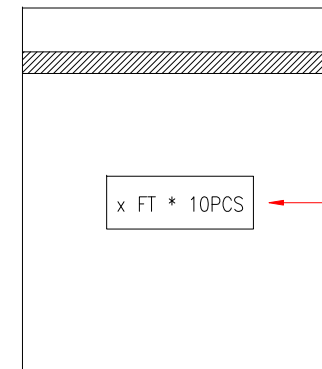

LABEL A



LABEL A

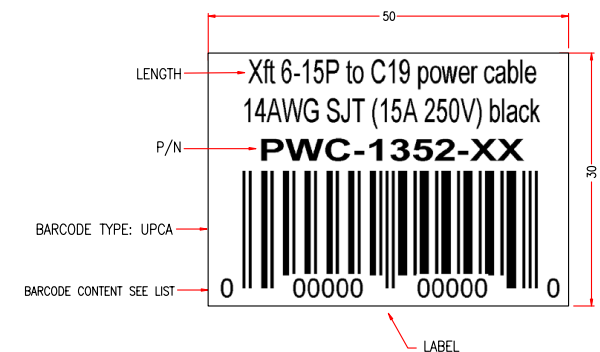

*NOTE: All relevant materials are complied with RoHS directive .