



# NEMA L6-20P to IEC C15 Power Cable - 14AWG - SJT

PWC-144-xx - Specifications

## Description

This power cord consists of a L6-20P male on one end and a C15 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

## Physical Characteristics

Color	Black
Number of Conductors	3 Conductor
Wire Gauge	14 AWG
Jacket	Heavy duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2 VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

## Connector(s)

Connector A	NEMA L6-20P
Connector B	IEC C15

## Performance

Power Rating	15 Amp / 250 Volt
--------------	-------------------

## Approvals

6-20P	c(UL)us
C15	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000

## Environmental

RoHS	Yes
Reach	Yes
Conflict Minerals	Yes


## Packaging Information

Package Quantity	1
------------------	---

## Warranty Information

Warranty	Limited Lifetime
----------	------------------



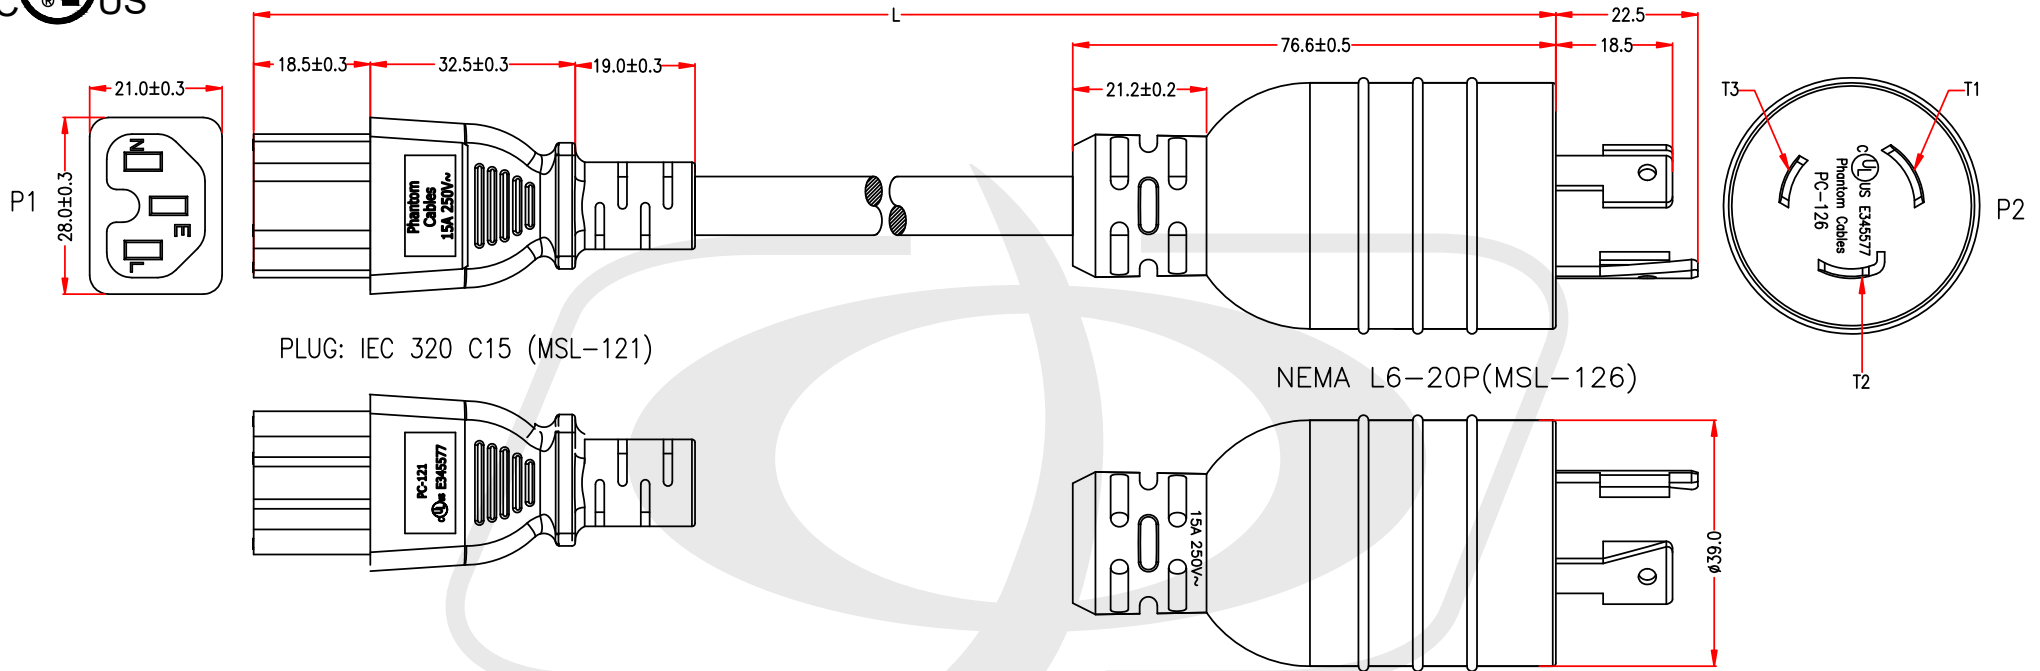

PLUG: IEC 320 C15 (MSL-121)

NEMA L6-20P(MSL-126)

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°

CABLE MARKING:



Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm<sup>2</sup>) 105°C 300V VW-1



# NEMA L6-20P to IEC C15 Power Cable - 14AWG - SJT

PWC-144-xx - Packaging Information

PACKING:  
1PCS IN A ZIP BAG

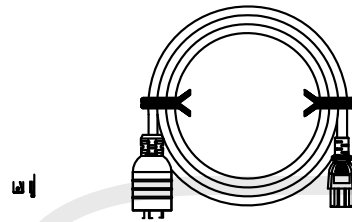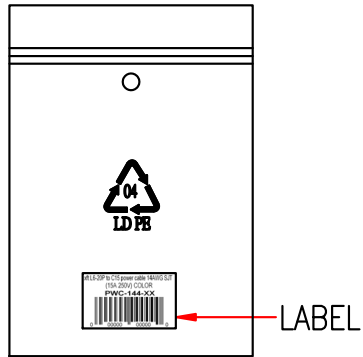

P/N.	LENGTH	LABEL(BARCODE)
PWC-144-08	2438mm(8ft)	675678061846
PWC-144-12	3658mm(12ft)	675678061853

