



NEMA L6-30P to NEMA L6-30R Power Cable - SJT (250V 30A)

PWC-167-15 - Specifications

Description

This power cord consists of a L6-30P male on one end and a L6-30R female on the other end. It is typically used as an adapter cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	15 foot [4.5m]
Number of Conductors	3 Conductor
Wire Gauge	10 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	NEMA L6-30P
Connector B	NEMA L6-30R

Performance

Power Rating	30 Amp / 250 Volt
--------------	-------------------

Approvals / Environmental

L6-30P	c(UL)us
L6-30R	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes


Warranty Information

Warranty	Limited Lifetime
----------	------------------



NEMA L6-30P to NEMA L6-30R Power Cable - SJT (250V 30A)

PWC-167-15 - Line Drawing

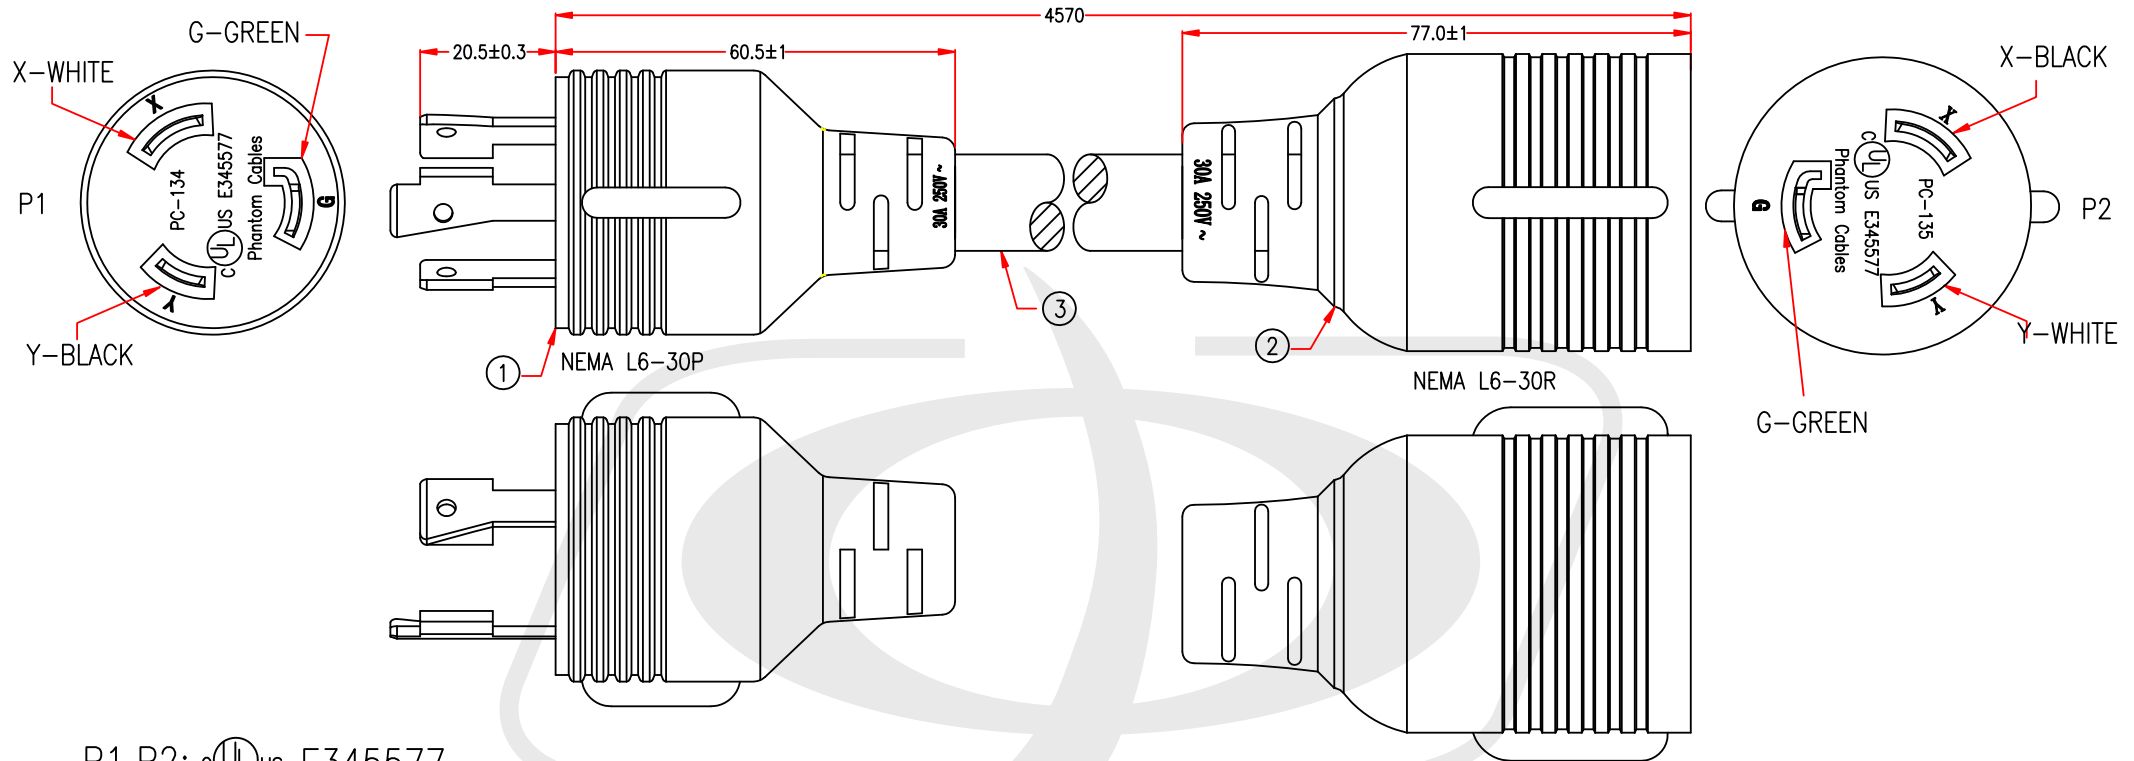

P1,P2: c(UL)us E345577

THE MARKING IS CONCAVE LETTERING MOULD

Phantom Cables c(UL)us E345578 SJT 3/C 10AWG(5.26mm²) 105°C 300V VW-1

	P1		P2
BLACK	Y	—————	X
WHITE	X	—————	Y
GREEN	G	—————	G

Tolerance

>0±0.30


>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°


PACKING :

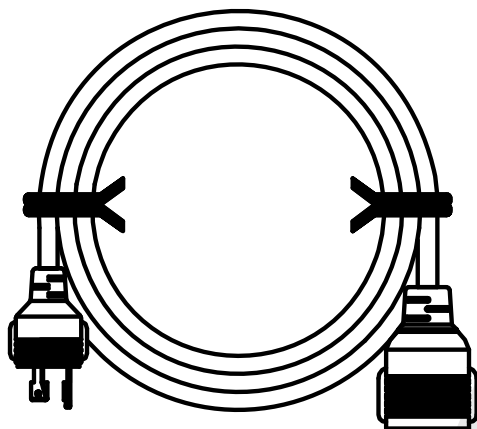


LENGTH →

P/N →

BARCODE TYPE: UPCA →

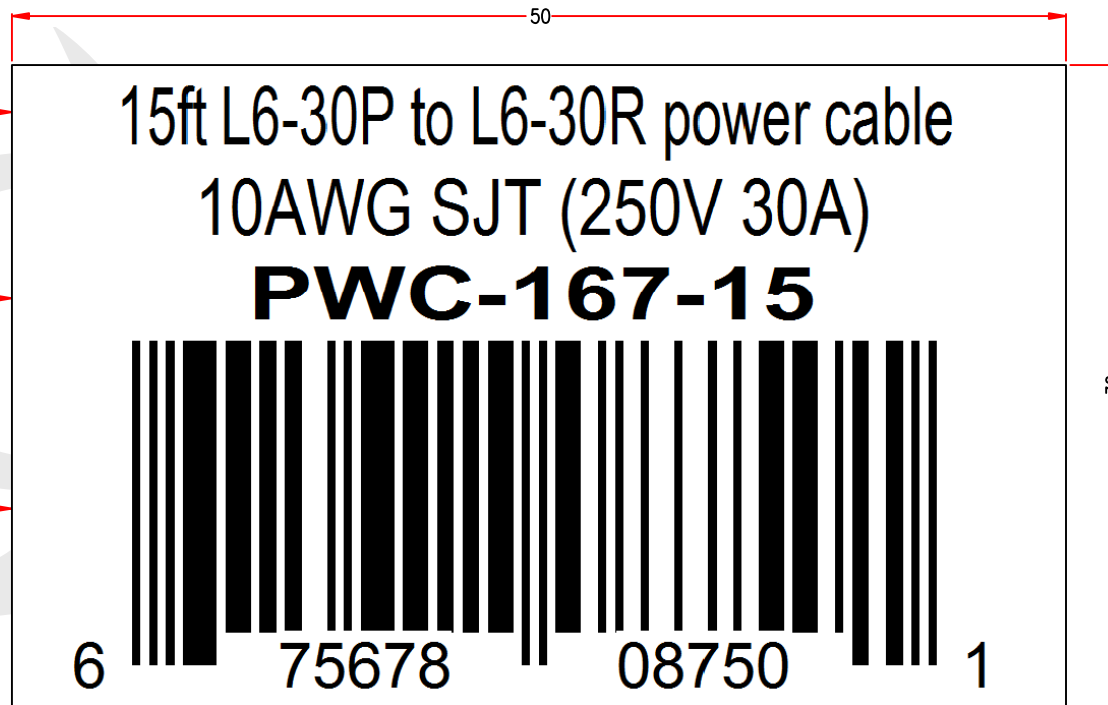

PACKING:
1PCS IN A ZIP BAG

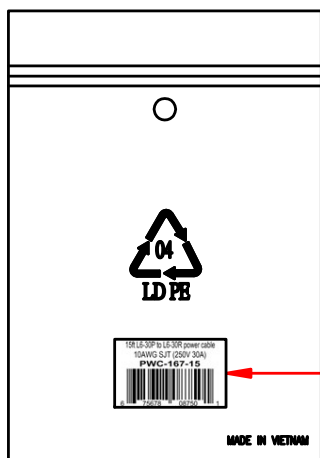

LABEL

LABEL