



# 1ft C20 to L6-30R Power Cable - 12AWG - SJT (250V 20A)

PWC-1695-01 - Specifications

## Description

This power cord consists of a C20 male on one end and a L6-30R female on the other end. It is typically used as an adapter cable. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

## Physical Characteristics

Color	Black
Length	1 foot [0.3m]
Number of Conductors	3 Conductor
Wire Gauge	12 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	FT2, VW-1
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

## Connector(s)

Connector A	IEC 60320 C20
Connector B	NEMA L6-30R

## Performance

Power Rating	20 Amp / 250 Volt
--------------	-------------------

## Approvals / Environmental

C20	c(UL)us
L6-30R	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes


## Warranty Information

Warranty	Limited Lifetime
----------	------------------



# 1ft C20 to L6-30R Power Cable - 12AWG - SJT (250V 20A)

PWC-1695-01 - Line Drawing

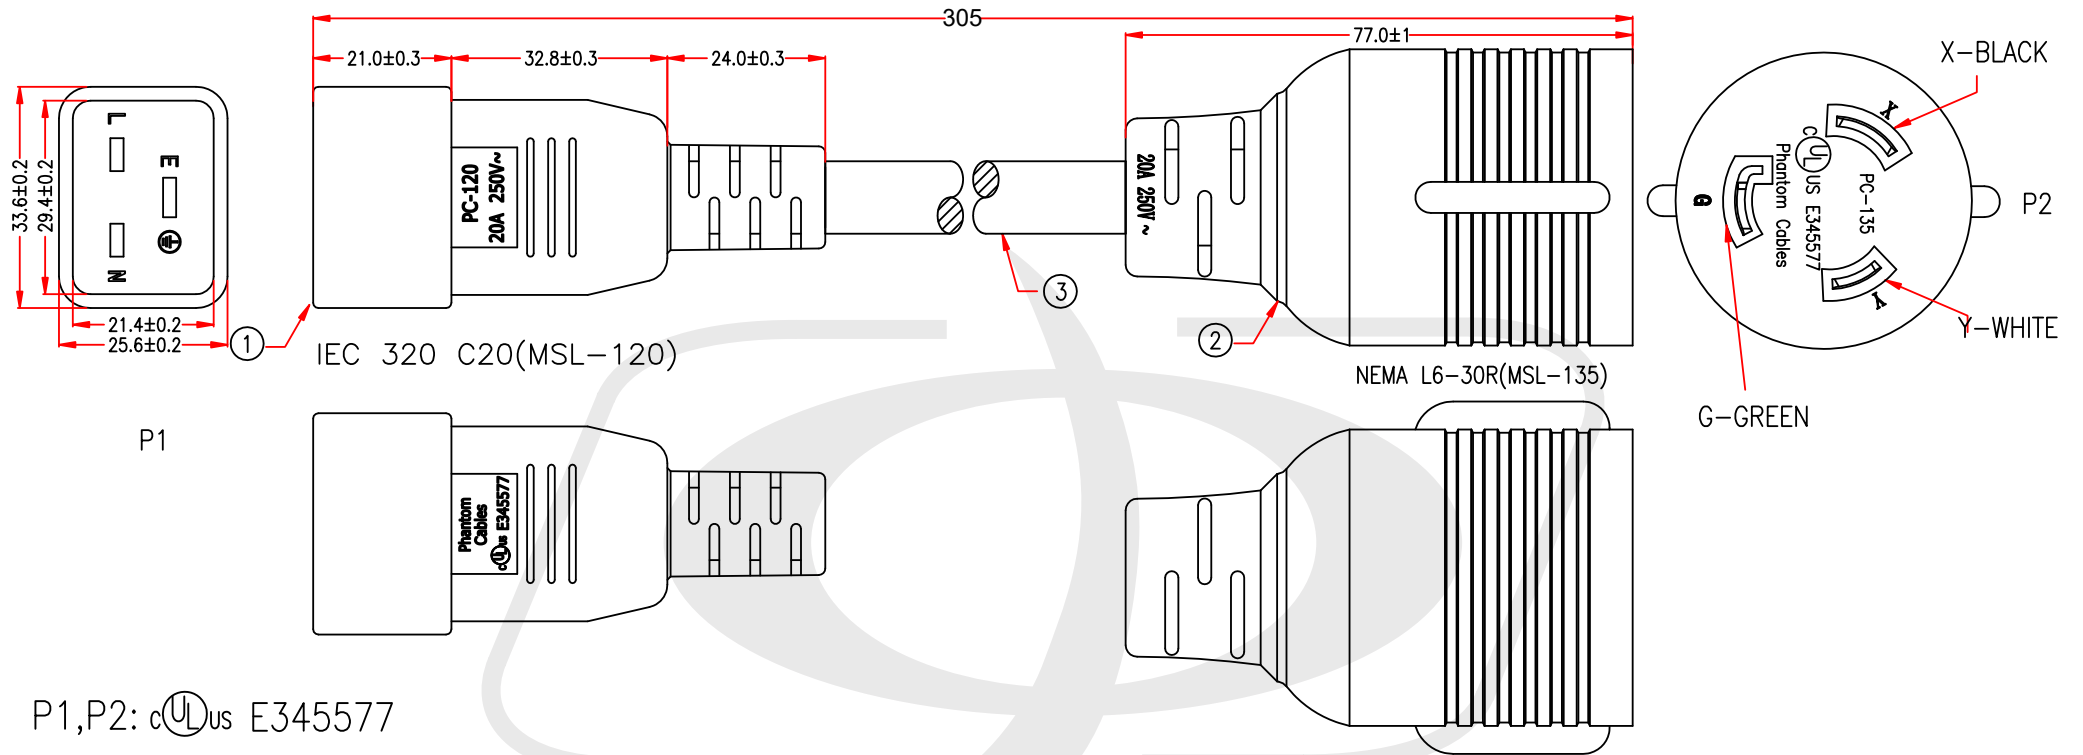

P1,P2: c(UL)us E345577

Phantom Cables c(UL)us E345578 SJT 3/C 12AWG(3.31mm<sup>2</sup>) 105°C 300V VW-1

	P1	P2
BLACK	L	X
WHITE	N	Y
GREEN	E	G

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0

Angle: ±1°



# 1ft C20 to L6-30R Power Cable - 12AWG - SJT (250V 20A)

PWC-1695-01 - Packaging Information

PACKING :

PACKING:  
1PCS IN A ZIP BAG

PACKING: 1-10FT  
10PCS IN A BIG POLYBAG

