



2m CEE 7/16 (Euro) to IEC-C7 Power Cable

PWC-173-2M - Specifications

Description

This power cord consists of a CEE 7/16 male on one end and a C7 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	2m
Number of Conductors	3 Conductor
Wire Gauge	0.75mm2
Jacket	H05VV-F
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Strain Relief	Molded 100% Virgin PVC

Connector(s)

Connector A	CEE 7/16 (Euro)
Connector B	IEC 60320 C7

Performance

Power Rating	2.5 Amp / 250 Volt
--------------	--------------------

Approvals / Environmental

Standards	Manufactured in Compliance With
ISO	CEE ISO 9001:2015, ISO 14000
Additional Standards	
Available Upon Request	
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes


Warranty Information

Warranty	Limited Lifetime
----------	------------------



2m CEE 7/16 (Euro) to IEC-C7 Power Cable

PWC-173-2M - Line Drawing

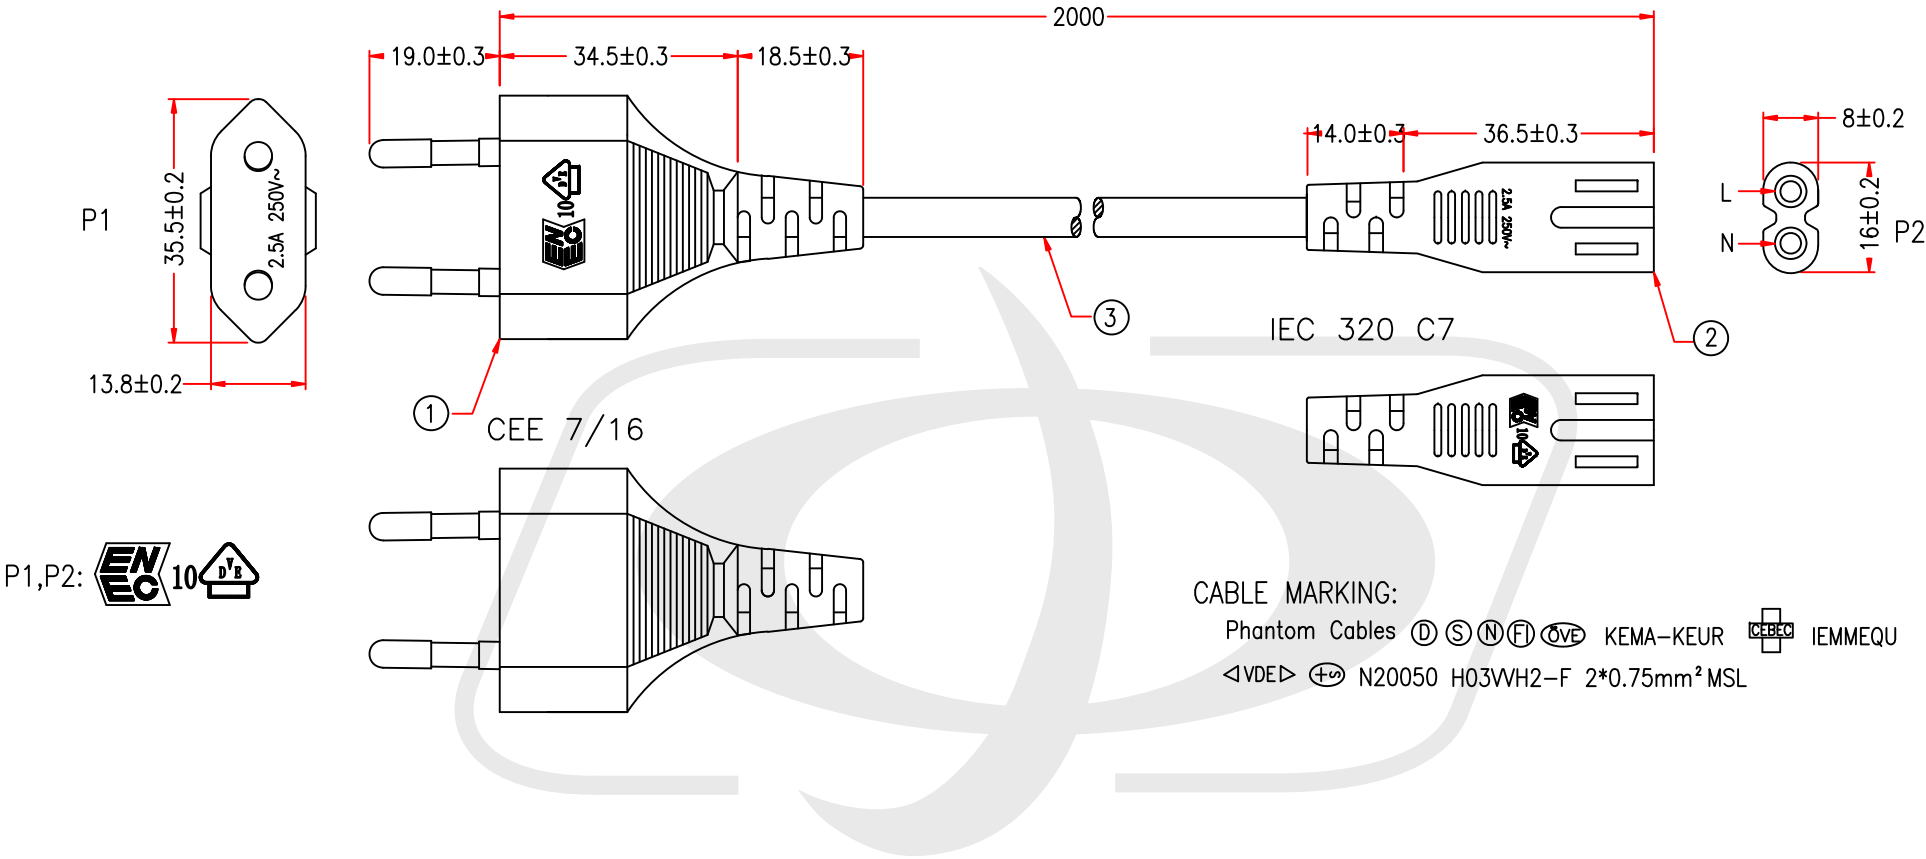

P1	P2
BROWN	BROWN
BLUE	BLUE

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0



Angle: ±1°




2m CEE 7/16 (Euro) to IEC-C7 Power Cable

PWC-173-2M - Packaging Information

PACKING :

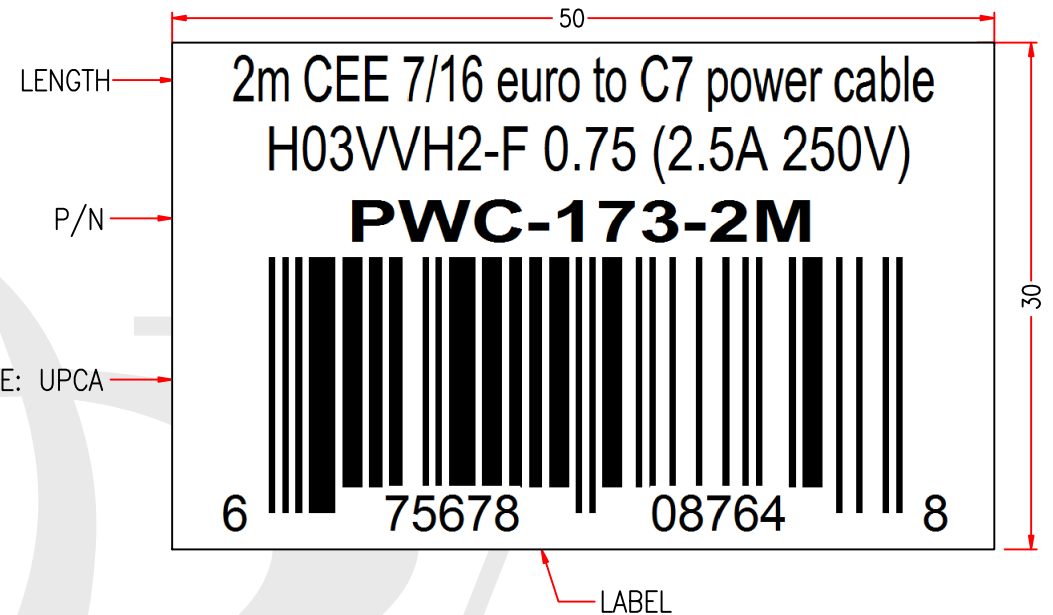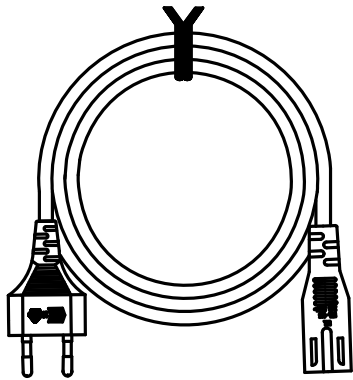

PACKING:
1PCS IN A ZIP BAG

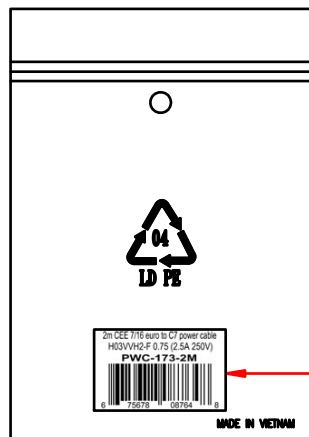

PACKING: 1-10FT
10PCS IN A BIG POLYBAG

