

BS1363 (UK) to C13 - H05VV-F 1.0 (10A 250V) Power Cable

PWC-175-xM - Specifications

Description

This power cord consists of a BS1363 male on one end and a C13 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color Black

Length 1m / 2m

Number of Conductors 3 Conductor

Wire Gauge 1.0mm2

Jacket H05VV-F

Jacket Material 100% Virgin PVC - Polyvinyl

Strain Relief Chloride Molded 100% Virgin PVC

Conductor Material 100% bare copper

Connector(s)

BS1363 (UK) Connector A

Connector B IEC 60320 C13

Performance

Power Rating 10 Amp / 250 Volt

Approvals / Environmental

Standards Manufactured in Compliance With

ISO BS1363 ISO 9001:2015, ISO 14000

Additional Standards Available Upon Request

RoHS Yes

Reach Yes

Conflict Minerals Yes

Warranty Information

Warranty Limited Lifetime **Cable Weights**

3ft 6ft 10ft


0.40 lbs 0.59 lbs 0.73 lbs






BS1363 (UK) to C13 - H05VV-F 1.0 (10A 250V) Power **Cable**

PWC-175-xM - Line Drawing

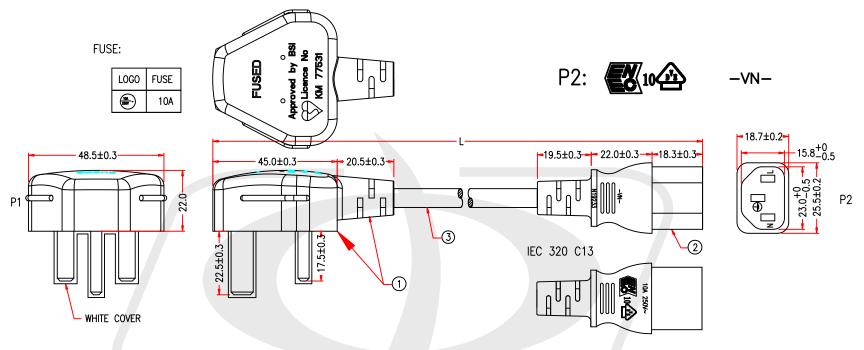




BS 1363-1

CABLE MARKING:

Phantom Cables H05W-F 3G 1.0mm² (1) (S) (N) (F) (WE) KEMA-KEUR (CHA) IEMMEQU <1/>
✓VDE > ⊕ N20050 GTSA-3 3G 1.0mm²






BS1363 (UK) to C13 - H05VV-F 1.0 (10A 250V) Power

Cable


PWC-175-xM - Packaging Information

PACKING:






PACKING: 1PCS IN A ZIP BAG



PACKING: 1-10FT 10PCS IN A BIG POLYBAG



P/N.	LENGTH(Lmm)	LENGTH(Xmm)	Barcode content
PWC-175-1M	1000mm	980mm	675678087655
PWC-175-2M	2000mm	1980mm	675678087662
PWC-175-3M	3000mm	2980mm	675678087679