



AS3112 (Australia) to IEC C13 Power Cord

PWC-180-xM - Specifications

Description

This power cord consists of a AS3112 male on one end and a C13 female on the other end. It is typically used to connect a server or UPS to a PDU or a wall outlet. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Color	Black
Length	1m/ 2m/ 3m
Number of Conductors	3 Conductor
Wire Gauge	1.0mm2
Jacket	H05VV-F
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Strain Relief	Molded 100% Virgin PVC

Connector(s)

Connector A	AS3112 (Australia)
Connector B	IEC 60320 C13

Performance

Power Rating	10 Amp / 250 Volt
--------------	-------------------


Approvals / Environmental

Standards	Manufactured in Compliance With AS3112
ISO	ISO 9001:2015, ISO 14000
Additional Standards	
Available Upon Request	
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Warranty Information

Warranty	Limited Lifetime
----------	------------------



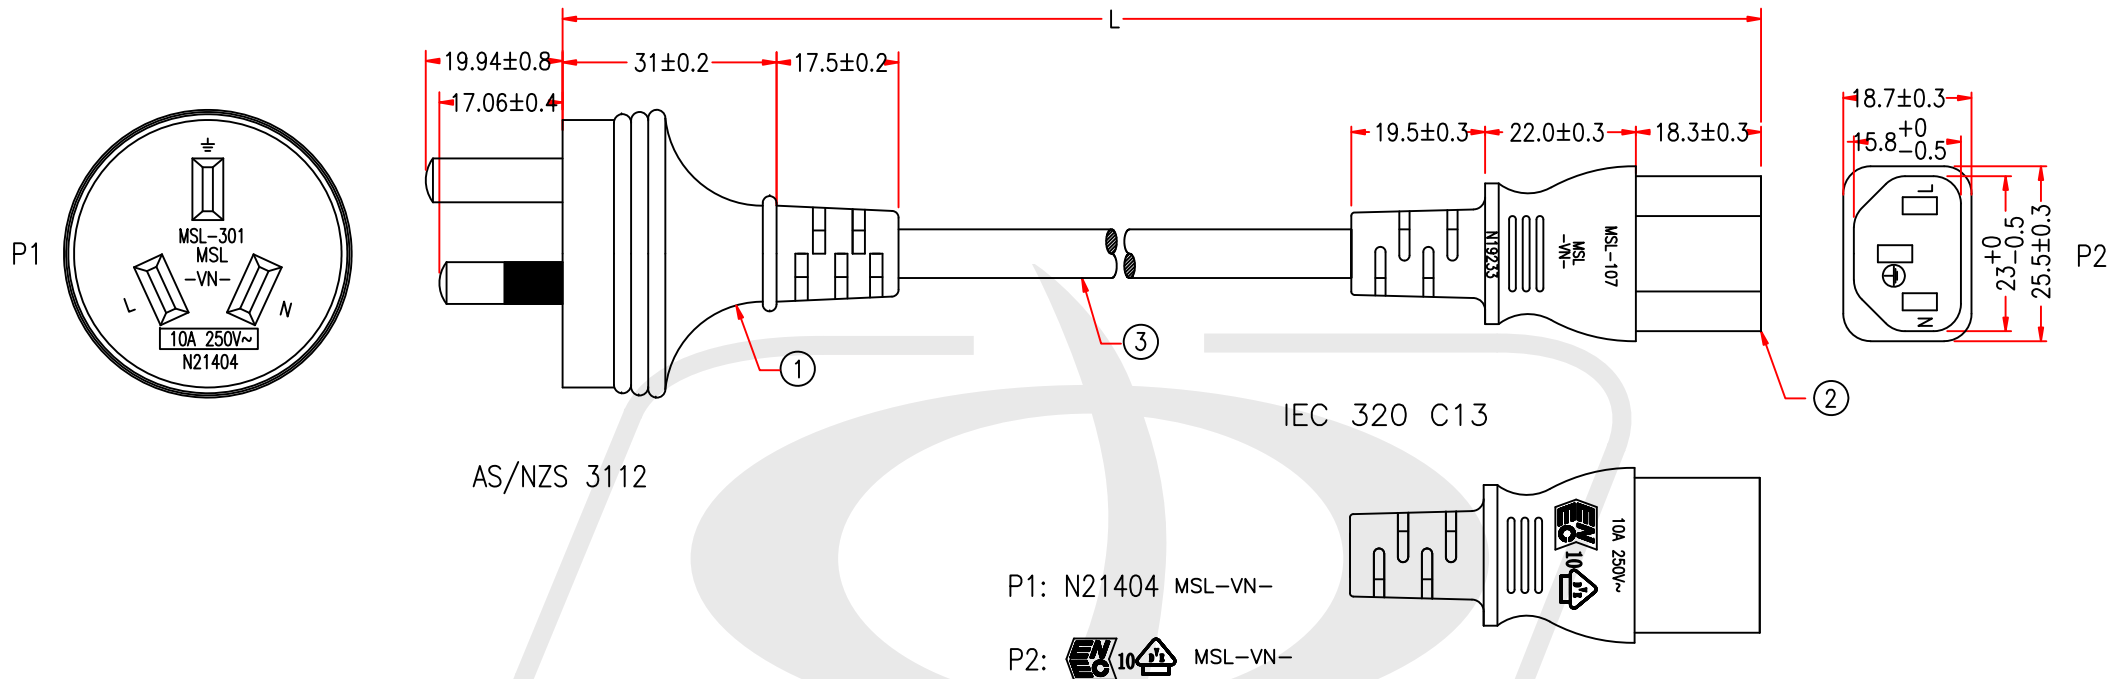

AS/NZS 3112

IEC 320 C13

P1: N21404 MSL-VN-

P2: 10A MSL-VN-

CABLE MARKING:

Phantom Cables H05W-F 3G 1.0mm² KEMA-KEUR

IEMMEQU <VDE> N20050 GTSA-3 3G 1.0mm²

P1	P2
L	L BROWN
N	N BLUE
E	E GREEN/YELLOW

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0

>20.0±2.0


Angle: ±1°




AS3112 (Australia) to IEC C13 Power Cord

PWC-180-xM - Packaging Information

PACKING :

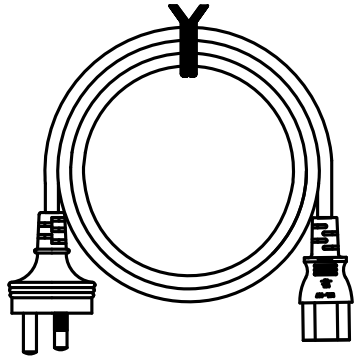


PACKING:
1PCS IN A ZIP BAG




LABEL

PACKING: 1-10FT
10PCS IN A BIG POLYBAG

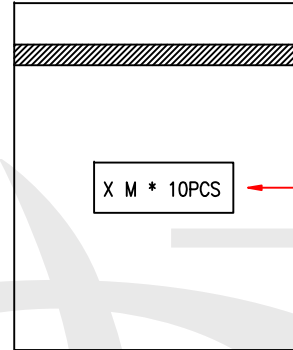

LABEL A




P/N.	LENGTH(Lmm)	LENGTH(Xmm)	Barcode content
PWC-180-1M	1000mm	980mm	675678087709
PWC-180-2M	2000mm	1980mm	675678087716
PWC-180-3M	3000mm	2980mm	675678087723

LENGTH

P/N

BARCODE TYPE: UPCA

BARCODE CONTENT SEE LIST

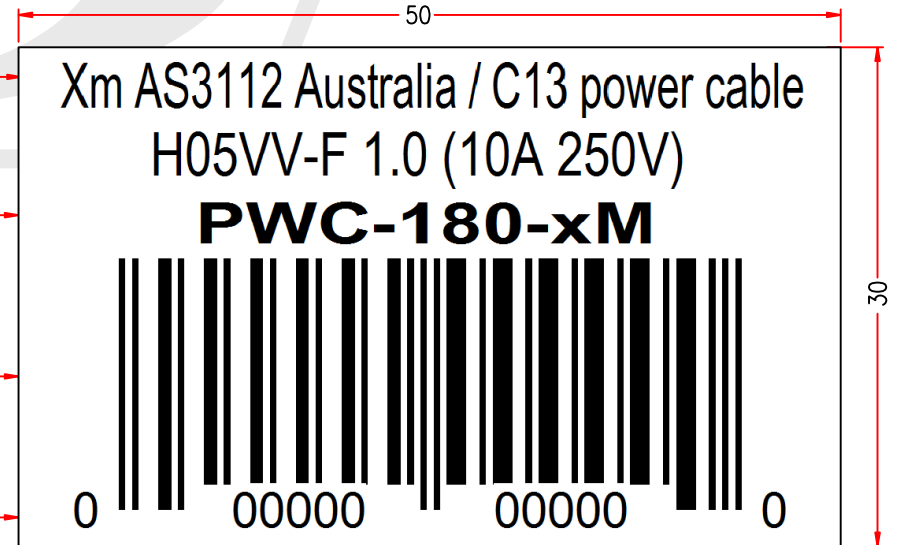

LABEL