



IEC C14 to 2x IEC C13 Power Splitter Cable - SJT - 14AWG

PWC-200C-xx - Specifications

Description

This power cord consists of a 5-15P male on one end and two C13 females on the other end. It is typically used on devices with multiple power supplies sharing one receptacle. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

| | |
|---------------------------|--------------------------------------|
| Colors | Black |
| Number of Conductors | 3 Conductor |
| Wire Gauge | 14AWG |
| Jacket | Heavy Duty SJT |
| Jacket Material | 100% Virgin PVC - Polyvinyl Chloride |
| Jacket Fire Rating Strain | VW-1 |
| Relief | Molded 100% Virgin PVC |
| Conductor Material | 100% bare copper |
| Temperature Rating | -20 deg C to 105 deg C |

Connectors

| | |
|-------------|---------------|
| Connector A | IEC 60320 C14 |
| Connector B | IEC 60320 C13 |
| Connector B | IEC 60320 C13 |

Performance

| | |
|--------------|-------------------|
| Power Rating | 15 Amp / 250 Volt |
|--------------|-------------------|

Approvals/Product Support


| | |
|------------------------------|--------------------------|
| C14, C13, C13, Cable | c(UL)us |
| ISO | ISO 9001:2015, ISO 14000 |
| RoHS/Reach/Conflict Minerals | Yes |
| Country of Origin | Vietnam |


Packaging Information

| | |
|------------------|---|
| Package Quantity | 1 |
|------------------|---|

Warranty Information

| | |
|----------|------------------|
| Warranty | Limited Lifetime |
|----------|------------------|

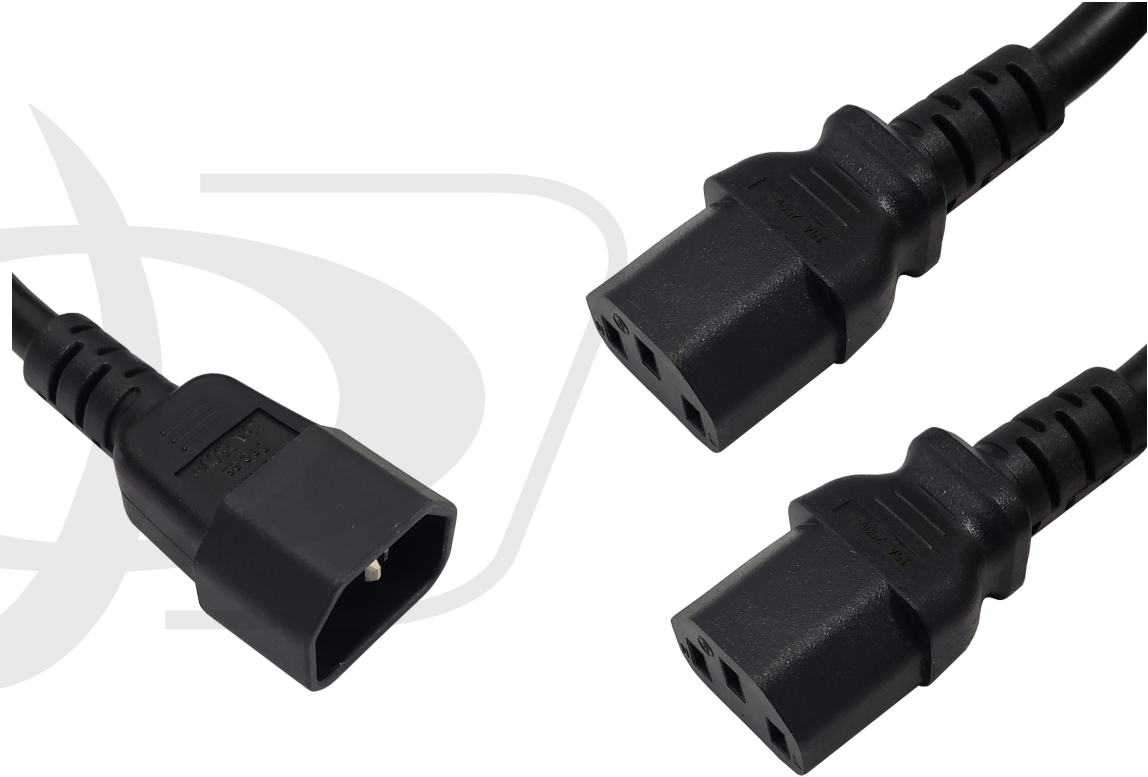

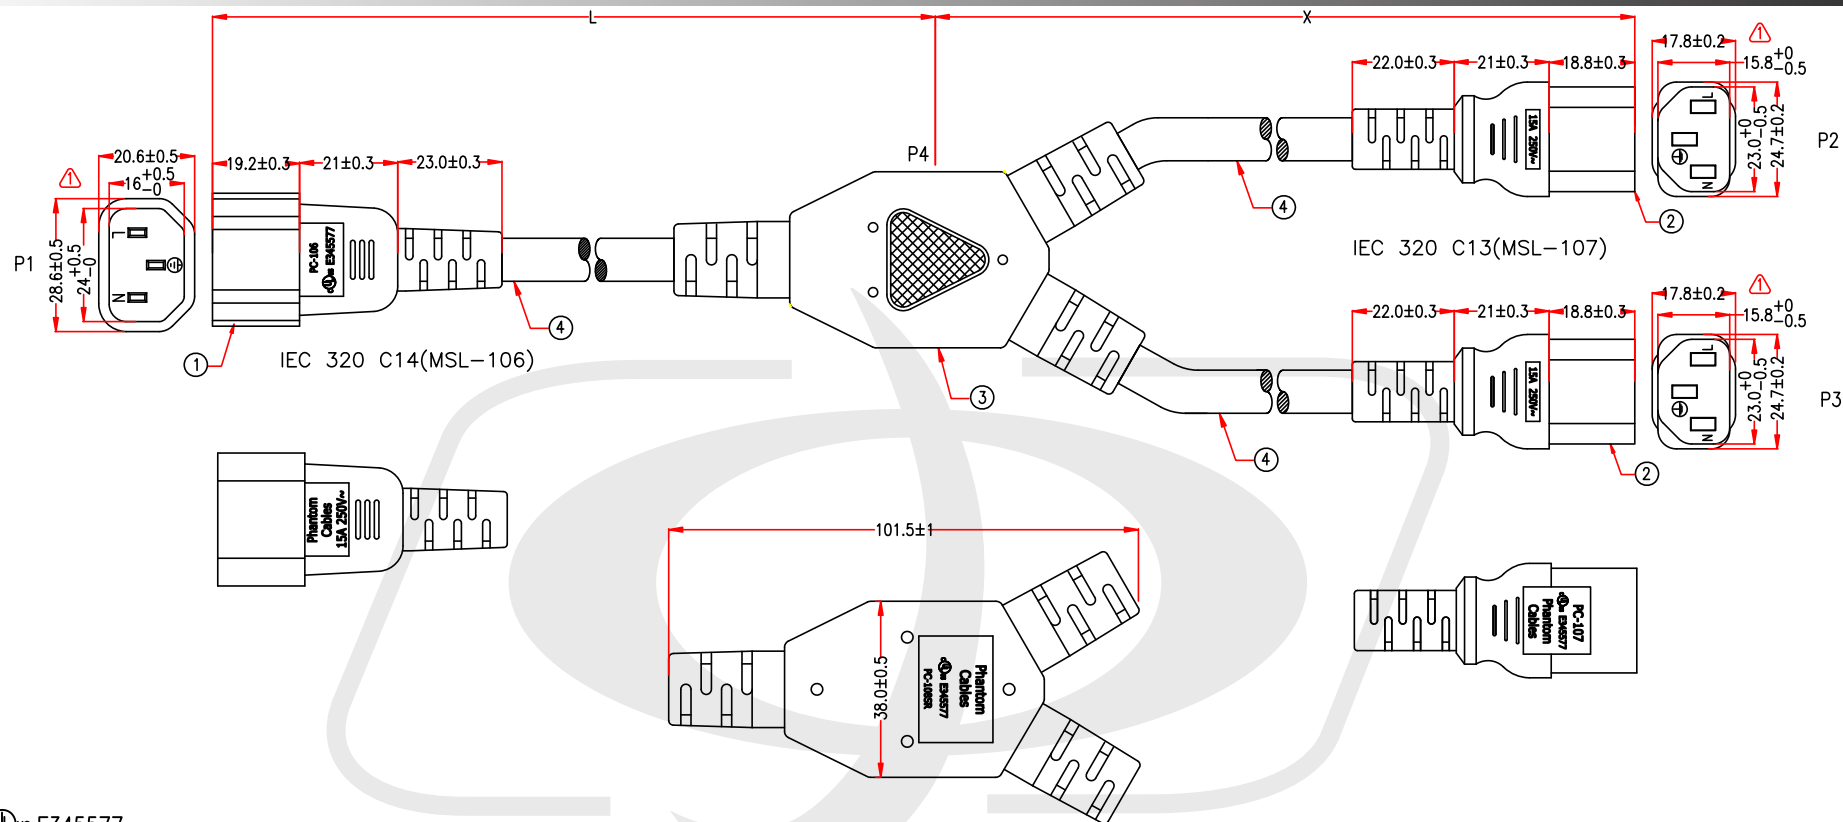

P1,P2,P3,P4: cULus E345577

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm²) 105°C 300V VW-1

| | P1 | P2 | P3 |
|-------|----|----|----|
| BLACK | L | L | L |
| WHITE | N | N | N |
| GREEN | E | E | E |

Cable Length
Unless Other Spec.
Tolerances:

| | |
|--------------|-------|
| 0 ~200mm | ±10mm |
| 201~1000mm | ±20mm |
| 1001 ~1500mm | ±25mm |
| 1501~2100mm | ±30mm |
| 2100mm↑ | ±40mm |

THE CABLE MARKING IS CONCAVE LETTERING MOULD




IEC C14 to 2x IEC C13 Power Splitter Cable - SJT - 14AWG


PWC-200C-xx - Packaging Information

| P/N | LENGTH(Lmm) | LENGTH(Xmm) | UPC |
|-------------|-------------|-------------|--------------|
| PWC-200C-01 | 200mm | 200mm | 675678062812 |
| PWC-200C-02 | 200mm | 458mm | 675678062829 |
| PWC-200C-03 | 305mm | 610mm | 675678062836 |
| PWC-200C-06 | 1219mm | 610mm | 675678062843 |
| PWC-200C-12 | 3048mm | 610mm | 675678062850 |


PACKING A: <3FT



PACKING B: ≥3FT




PACKING:
1PC IN A ZIP BAG




LABEL

PACKING: 1-10FT
10PCS IN A BIG POLYBAG




LABEL A



LABEL A

BARCODE TYPE: UPCA

BARCODE CONTENT SEE LIST

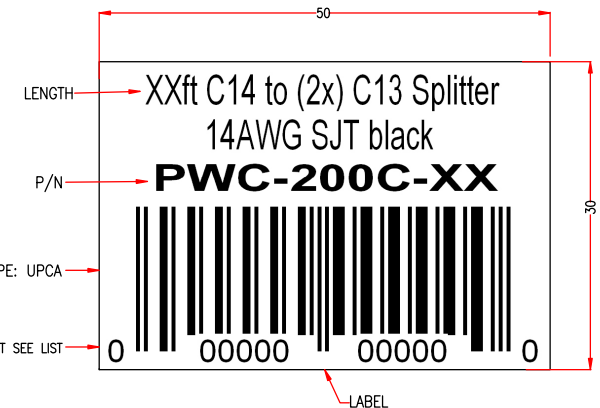

*NOTE: All relevant materials are complied with RoHS directive .