

IEC C14 to 2x IEC C15 Power Splitter Cable - SJT - 14AWG

PWC-201C-xx - Specifications

Description

This power cord consists of a C14 male on one end and two C15 females on the other end. It is typically used on devices with multiple power supplies sharing one receptacle. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors Black

Number of Conductors 3 Conductor

Wire Gauge 14AWG

Jacket Heavy Duty SJT

Jacket Material 100% Virgin PVC - Polyvinyl Chloride

Jacket Fire Rating Strain VW-1

Relief Molded 100% Virgin PVC

Conductor Material 100% bare copper

Temperature Rating -20 deg C to 105 deg C

Split Length 610mm [2ft]

Connectors

 Connector A
 IEC 60320 C14

 Connector B
 IEC 60320 C15

 Connector B
 IEC 60320 C15

Performance

Power Rating 15 Amp / 250 Volt

Approvals/Product Support

5-15P, 5-15R, 5-15R, Cable c(UL)us

ISO 9001:2015. ISO 14000

RoHS/Reach/Conflict Minerals Yes

Country of Origin Vietnam

Packaging Information

Package Quantity

Warranty Information

Warranty Limited Lifetime








IEC C14 to 2x IEC C15 Power Splitter Cable - SJT - 14AWG


PWC-201C-xx - Line Drawing

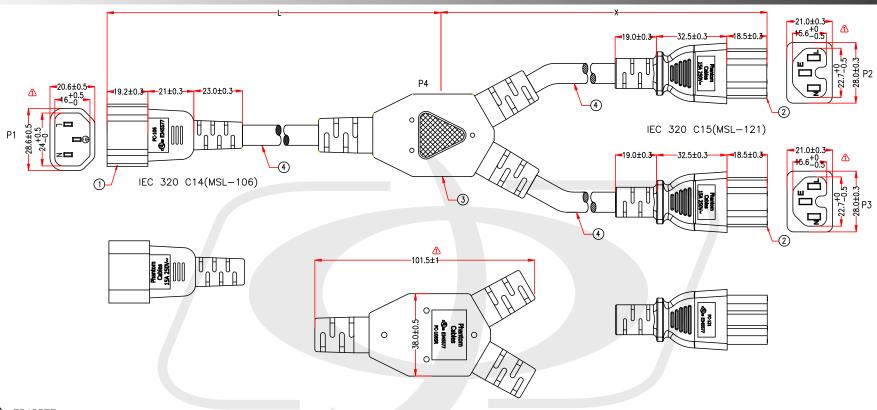

P1,P2,P3,P4: c@us E345577

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm²) 105°C 300V VW-1



THE CABLE MARKING IS CONCAVE LETTERING MOULD

Cable Length Unless Other Spec. Tolerances:


> 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm ±40mm



IEC C14 to 2x IEC C15 Power Splitter Cable - SJT - 14AWG

PWC-201C-xx - Packaging Information

P/N	LENGTH(Lmm)	LENGTH(Xmm)	UPC
PWC-201C-03	914mm	610mm	675678062867
PWC-201C-06	1828mm	610mm	675678062874

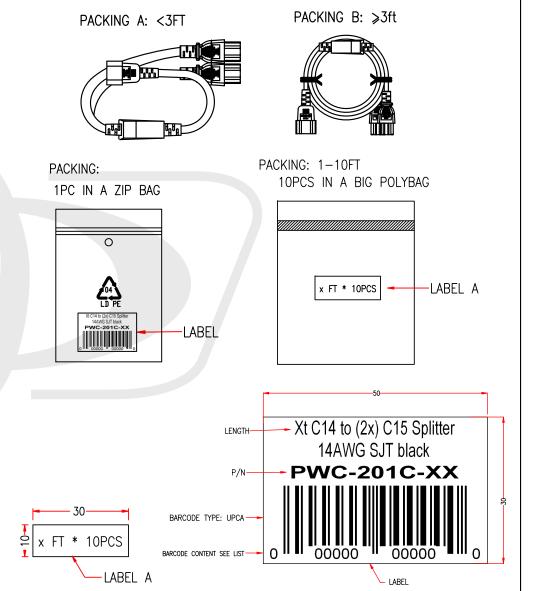

*NOTE: All relevant materials are complied with RoHS directive .