



# NEMA 5-15P to 2x NEMA 5-15R Power Splitter Cable - SJT - 14AWG

## PWC-210C-xx - Specifications

### Description

This power cord consists of a 5-15P male on one end and two 5-15R females on the other end. It is typically used on devices with multiple power supplies sharing one receptacle. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

### Physical Characteristics

Colors	Black
Number of Conductors	3 Conductor
Wire Gauge	14AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl
Jacket Fire Rating	Chloride VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C
Split Length	1ft - 200mm [0.65ft] 3ft, 6ft - 610mm [2ft]

### Connectors

Connector A	NEMA 5-15P
Connector B	NEMA 5-15R
Connector B	NEMA 5-15R

### Performance

Power Rating	15 Amp / 250 Volt
--------------	-------------------

### Approvals/Product Support

5-15P, 5-15R, 5-15R, Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS/Reach/Conflict Minerals	Yes
Country of Origin	Vietnam


### Packaging Information

Package Quantity	1
------------------	---

### Warranty Information

Warranty	Limited Lifetime
----------	------------------



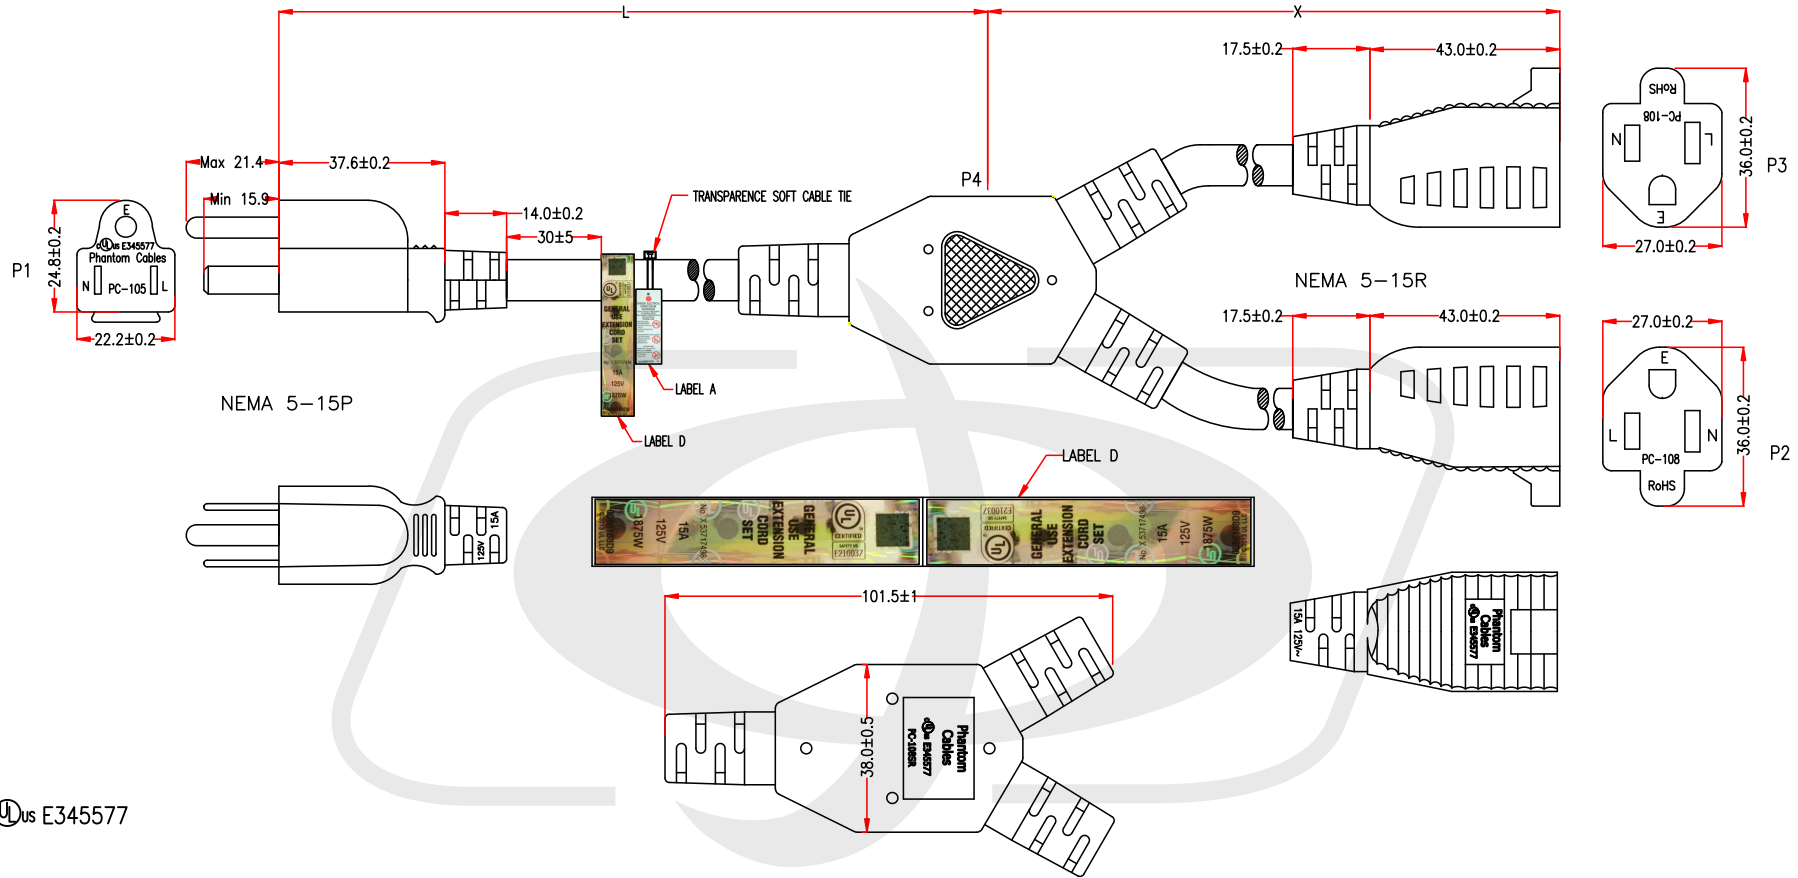

P1,P2,P3,P4: c(UL)us E345577

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm<sup>2</sup>) 105°C 300V VW-1

	P1	P2	P3
BLACK	L	L	L
WHITE	N	N	N
GREEN	E	E	E


Cable Length  
Unless Other Spec.

Tolerances:


0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

THE CABLE MARKING IS CONCAVE LETTERING MOULD


PACKING A:  $\leq$  2FT




PACKING B:  $\geq$  3FT





PACKING:  
1PC IN A ZIP BAG



PACKING: 1-10FT  
10PCS IN A BIG POLYBAG

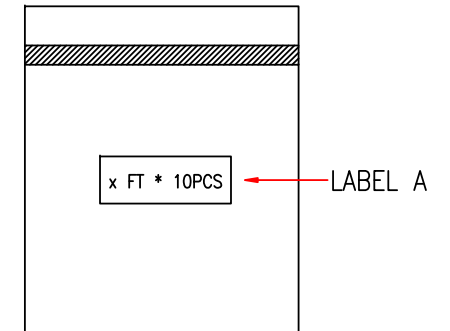

P/N	LENGTH(Lmm)	LENGTH(Xmm)	UPC
PWC-210C-01	200mm	200mm	675678062935
PWC-210C-03	305mm	610mm	675678062942
PWC-210C-06	1219mm	610mm	675678062959

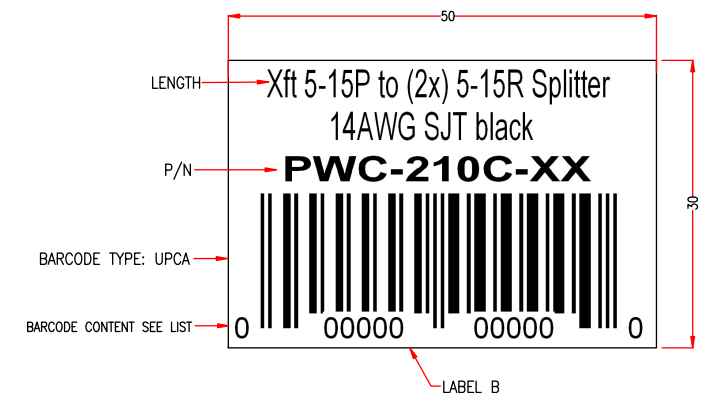

\*NOTE: All relevant materials are complied with RoHS directive .