

IEC C14 to 3x IEC C13 Power Splitter Cable - SJT - 16AWG

PWC-300B-xx - Specifications

Description

This power cord consists of a C14 male on one end and three C13 females on the other end. It is typically used on devices with multiple power supplies sharing one receptacle. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors Black

Number of Conductors 3 Conductor Wire Gauge 16AWG

Jacket Heavy Duty SJT

Jacket Material 100% Virgin PVC - Polyvinyl Chloride

Jacket Fire Rating VW-1

Strain Relief Molded 100% Virgin PVC

Conductor Material 100% bare copper

Temperature Rating -20 deg C to 105 deg C

Connectors

 Connector A
 IEC 60320 C14

 Connector B
 IEC 60320 C13

 Connector B
 IEC 60320 C13

 Connector B
 IEC 60320 C13

Performance

Power Rating 13 Amp / 250 Volt

Approvals/Product Support

C14, C13, C13, C13, Cable c(UL)us

ISO ISO 9001:2015, ISO 14000

RoHS, Reach, Conflict Minerals Yes

Vietnam

Country of Origin

Packaging Information

Package Quantity

Warranty Information


Warranty Limited Lifetime






IEC C14 to 3x IEC C13 Power Splitter Cable - SJT - 16AWG

PWC-300B-xx - Line Drawing

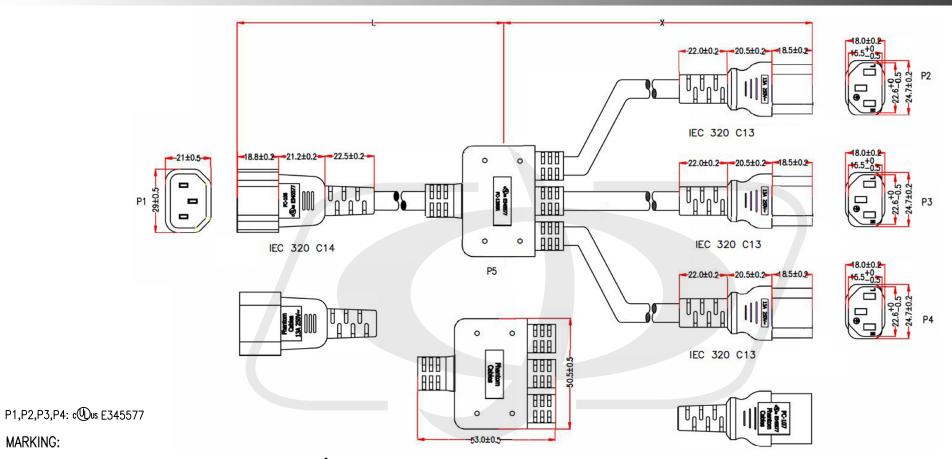

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 16AWG(1.31mm2) 105°C 300V VW-1



THE CABLE MARKING IS CONCAVE LETTERING MOULD

Cable Length Unless Other Spec. Tolerances:


0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm ↑	±40mm




IEC C14 to 3x IEC C13 Power Splitter Cable - SJT - 16AWG

PWC-300B-xx - Packaging Information

P/N	LENGTH(Lmm)	LENGTH(Xmm)	UPC
PWC-300B-03	305mm	610mm	675678063093
PWC-300B-06	1219mm	610mm	675678063109

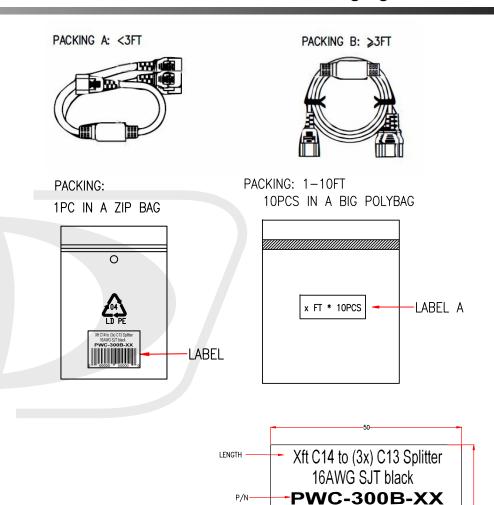



BARCODE TYPE: UPCA

BARCODE CONTENT SEE LIST

₽ x FT * 10PCS

LABEL A