



NEMA 5-15P to 3x IEC C13 Power Splitter Cable - 16AWG SJT

PWC-305B-xx - Specifications

Description

This power cord consists of a 5-15P male on one end and three C13 females on the other end. It is typically used on devices with multiple power supplies sharing one receptacle. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors	Black
Number of Conductors	3 Conductor
Wire Gauge	16AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

Connectors

Connector A	NEMA 5-15P
Connector B	IEC 60320 C13
Connector B	IEC 60320 C13
Connector B	IEC 60320 C13

Performance

Power Rating	13 Amp / 125 Volt
--------------	-------------------

Approvals/Product Support


5-15P, C13, C13, C13, Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS, Reach, Conflict Minerals	Yes
Country of Origin	Vietnam


Packaging Information

Package Quantity	1
------------------	---

Warranty Information

Warranty	Limited Lifetime
----------	------------------

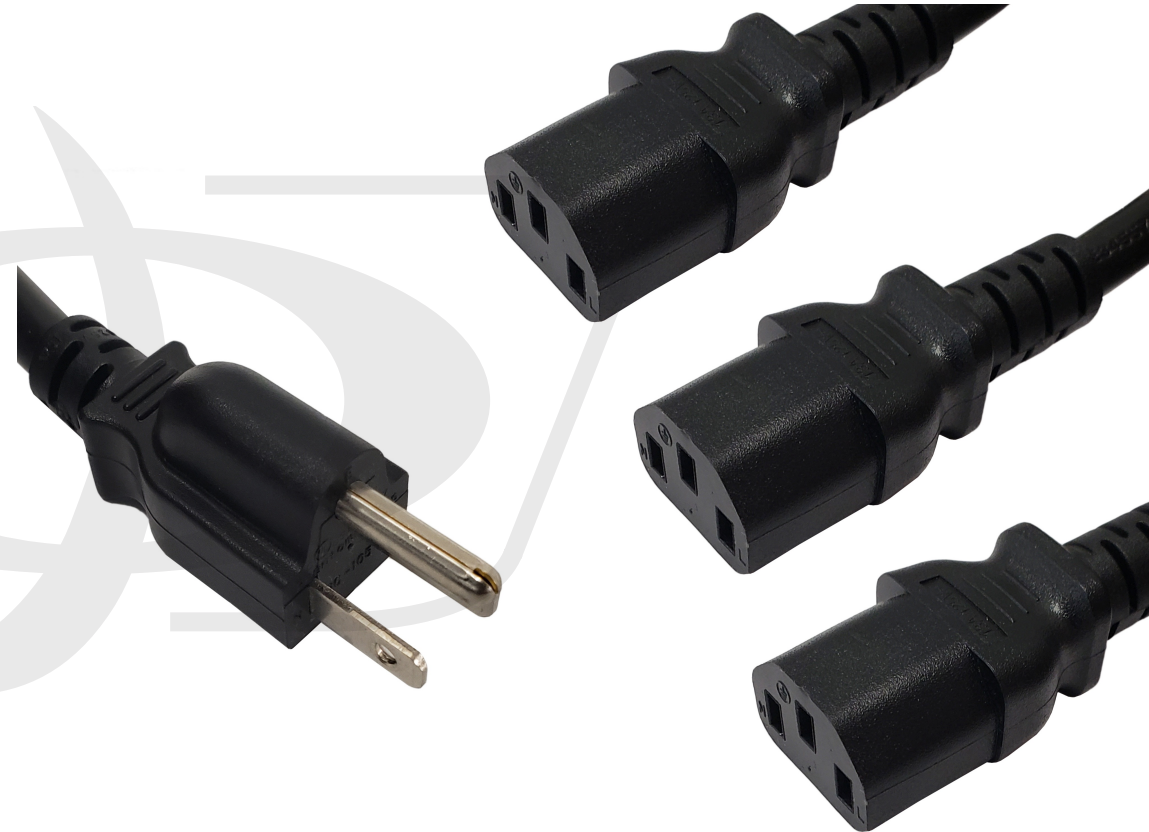

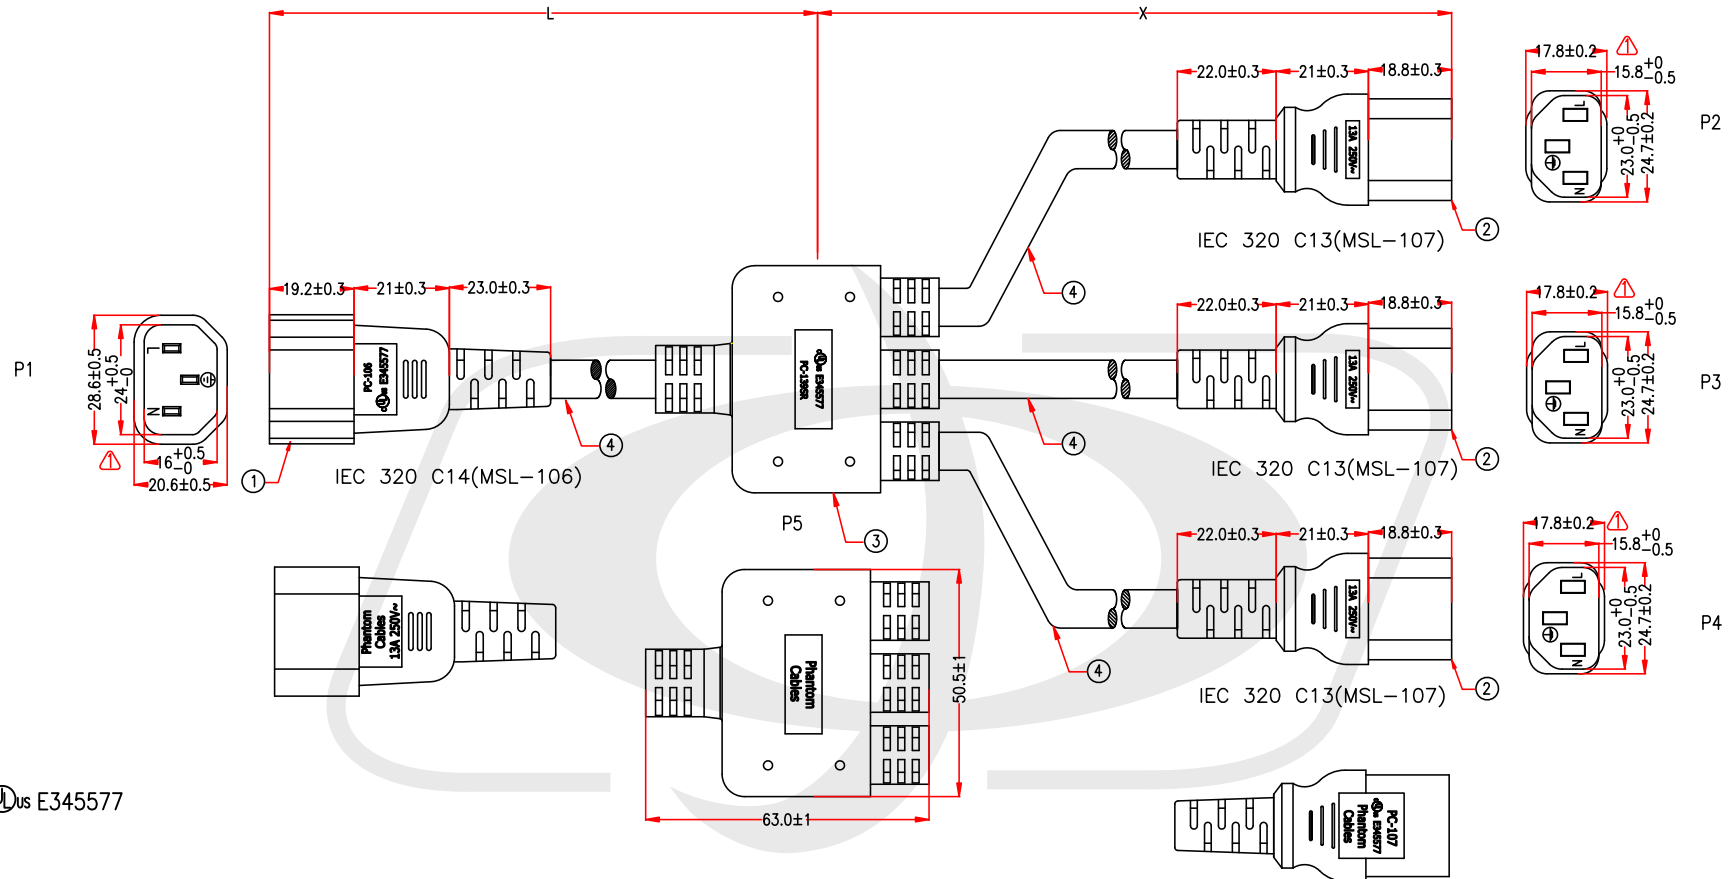

P1,P2,P3,P4: cULus E345577

MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 16AWG(1.31mm²) 105°C 300V VW-1

	P1	P2	P3	P4
BLACK	L	L	L	L
WHITE	N	N	N	N
GREEN	E	E	E	E


THE CABLE MARKING IS CONCAVE LETTERING MOULD

Cable Length
Unless Other Spec.


Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm


PACKING A: <3FT



PACKING B: ≥3FT




PACKING:
1PC IN A ZIP BAG




LABEL 1 & LABEL 2

PACKING: 1-10FT
10PCS IN A BIG POLYBAG




LABEL A

P/N	LENGTH(Lmm)	LENGTH(Xmm)	UPC
PWC-305B-03	305mm	610mm	675678063116
PWC-305B-06	1219mm	610mm	675678063123



LABEL A

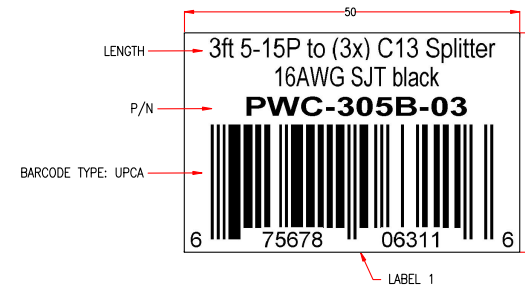

LABEL 1



LABEL 2

*NOTE: All relevant materials are complied with RoHS directive .