



IEC C14 to ROJ Power Cable - SJT - 16AWG

PWC-RI20B-xx - Specifications

Description

This power cord consists of a C14 male on one end and is un-terminated on the other with the outer jacket removed. These cords are typically hardwired directly to equipment. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors	Black
Lengths Available	3ft / 6ft / 8ft / 10ft
Number of Conductors	3 Conductor
Wire Gauge	16 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1
Jacket Outer Diameter	9.3mm
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20°C to 105°C

Connector(s)

Connector A	IEC 60320 C14
Connector B	Un-terminated - Outer Jacket Removed

Performance

Power Rating	13 Amp / 250 Volt
--------------	-------------------


Approvals / Product Support

C14	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS, Reach	Yes
Conflict Minerals	Yes
Country of Origin	Vietnam

Warranty Information

Warranty	Limited Lifetime
----------	------------------



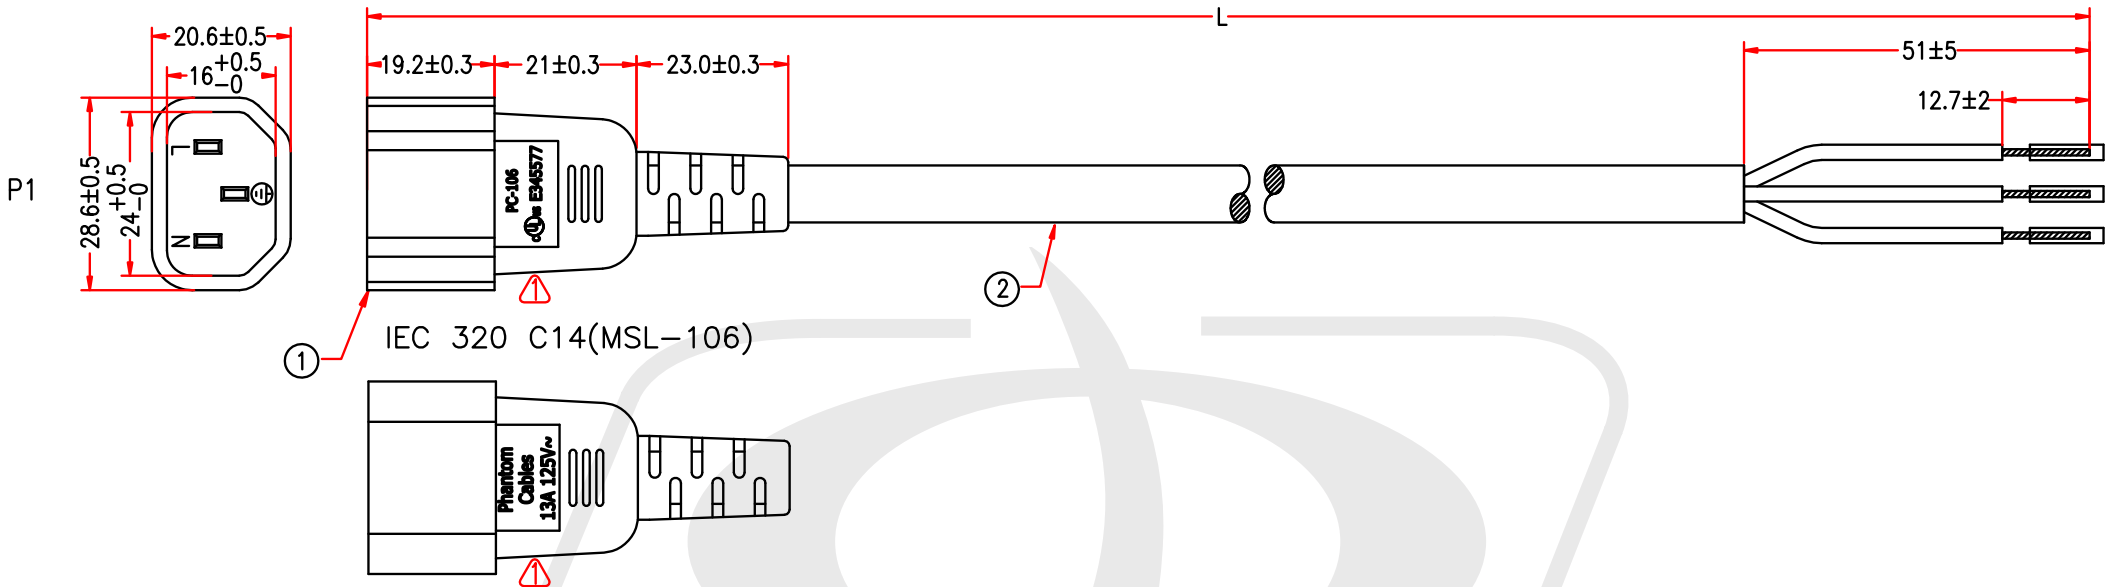

P1: cULus E345577

CABLE MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 16AWG(1.31mm²) 105°C 300V VW-1


106BB2F16A(FP385-00)	
P1	STRIPPED JACKET 51mm
BLACK L	SEMI-STRIPPED 12.7mm
WHITE N	SEMI-STRIPPED 12.7mm
GREEN E	SEMI-STRIPPED 12.7mm

Cable Length
Unless Other Spec.
Tolerances:


0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

THE CABLE MARKING IS CONCAVE LETTERING MOULD

PACKING A: $\leq 1\text{FT}$



PACKING B: $\geq 2\text{FT}$




PACKING:
1PC IN A ZIP BAG




LABEL

PACKING: 1-10FT
10PCS IN A BIG POLYBAG



LABEL A


P/N	LENGTH(Lmm)	UPC
PWC-RI20B-03	915mm	675678062492
PWC-RI20B-06	1830mm	675678062508
PWC-RI20B-08	2440mm	675678062515
PWC-RI20B-10	3048mm	675678062522



LABEL A

BARCODE TYPE: UPCA

BARCODE CONTENT SEE LIST

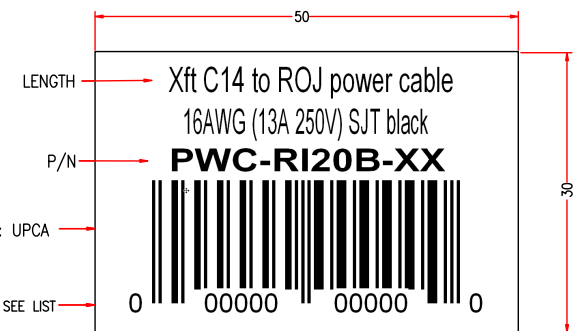

LABEL

*NOTE: All relevant materials are complied with RoHS directive .