



5-15P to ROJ Power Cable - SJT - 16AWG

PWC-RN10B-xx - Specifications

Description

This power cord consists of a 5-15P male on one end and is un-terminated on the other with the outer jacket removed. These cords are typically hardwired directly to equipment. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors	Black
Lengths Available	3ft / 6ft / 8ft / 10ft
Number of Conductors	3 Conductor
Wire Gauge	16 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1
Strain Relief	Molded 100% Virgin PVC
Conductor Material	100% bare copper
Temperature Rating	-20 deg C to 105 deg C

Connector(s)

Connector A	NEMA 5-15P
Connector B	Un-terminated - Outer Jacket Removed

Performance


Power Rating	13 Amp / 125 Volt
--------------	-------------------


Approvals / Product Support

5-15P	c(UL)us
Cable	c(UL)us
ISO	ISO 9001:2015, ISO 14000
RoHS, Reach	Yes
Conflict Minerals	Yes
Country of Origin	Vietnam

Warranty Information

Warranty	Limited Lifetime
----------	------------------

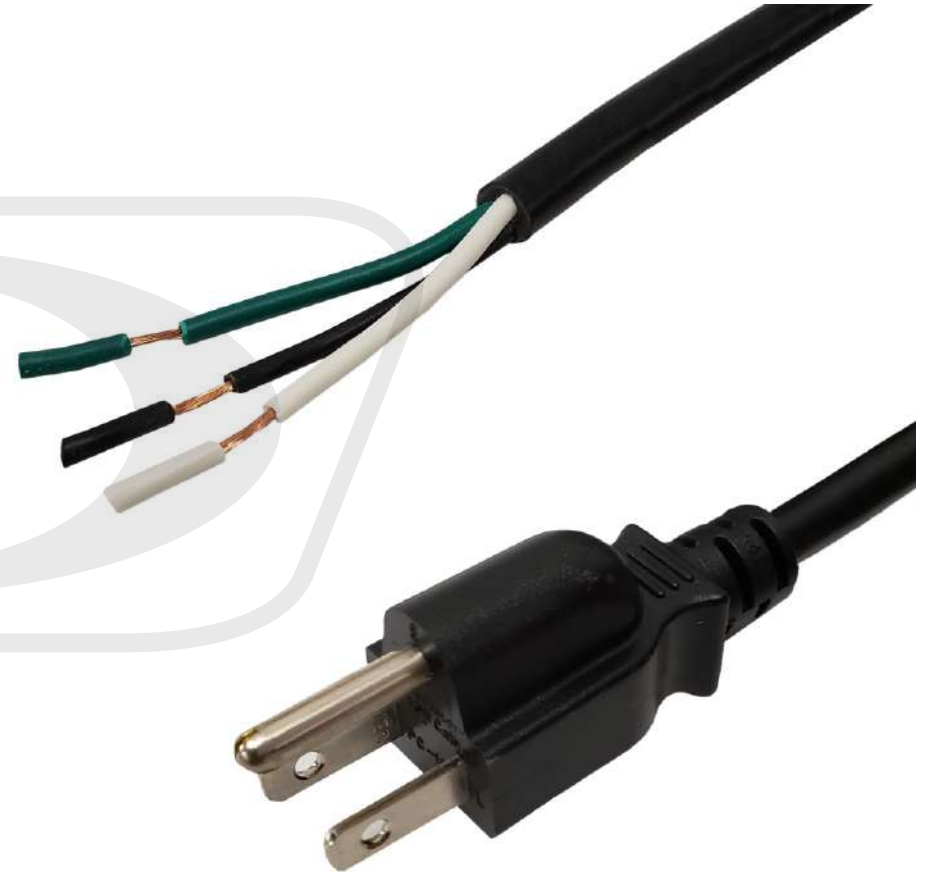

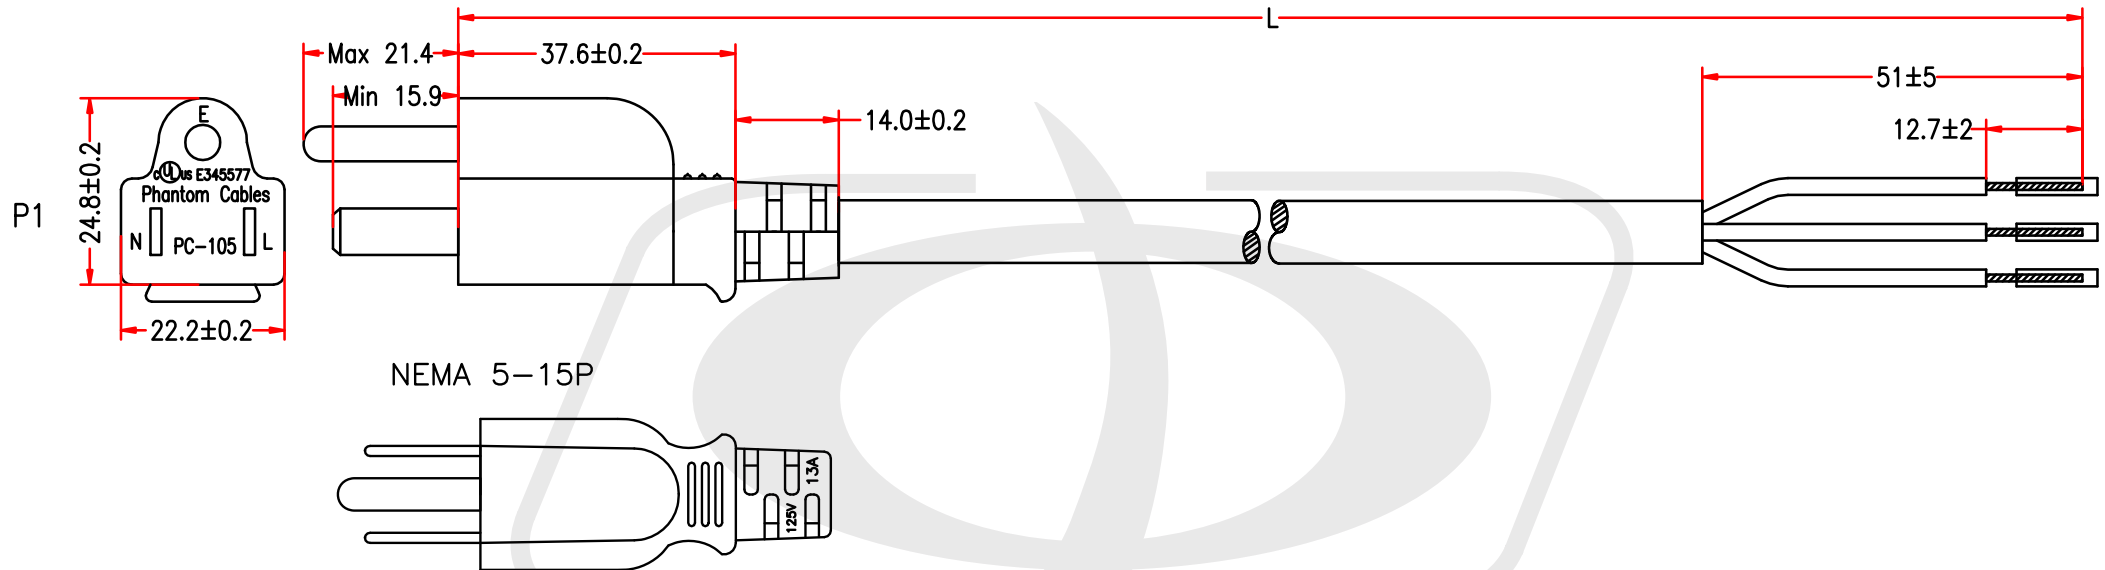

P1: c(UL)us E345577

CABLE MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 16AWG(1.31mm²) 105°C 300V VW-1

105BB2F16C(FP044-10)			
P1	STRIPPED JACKET 51mm		
BLACK	L	SEMI-STRIPPED	12.7mm
WHITE	N	SEMI-STRIPPED	12.7mm
GREEN	E	SEMI-STRIPPED	12.7mm


Cable Length
Unless Other Spec.

Tolerances:


0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

THE CABLE MARKING IS CONCAVE LETTERING MOULD

PACKING A: ≤ 1 FT




PACKING B: ≥ 2 FT




P/N	LENGTH(Lmm)	UPC
PWC-RN10B-03	915mm	675678062331
PWC-RN10B-06	1830mm	675678062348
PWC-RN10B-08	2440mm	675678062355
PWC-RN10B-10	3048mm	675678062362

PACKING:
1PC IN A ZIP BAG




LABEL

PACKING: 1-10FT
10PCS IN A BIG POLYBAG



LABEL A

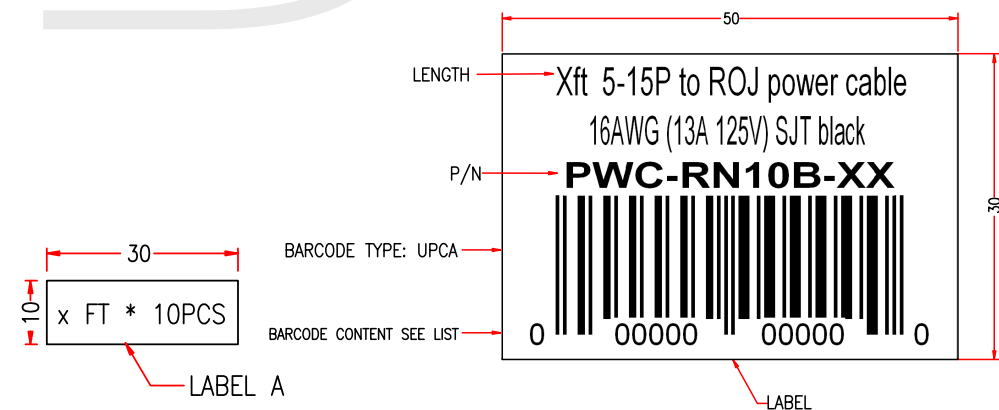

*NOTE: All relevant materials are complied with RoHS directive .