

5-15P to ROJ Power Cable - SJT - 14AWG

PWC-RN10C-xx - Specifications

Description

This power cord consists of a 5-15P male on one end and is un-terminated on the other with the outer jacket removed. These cords are typically hardwired directly to equipment. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and high quality molds. The connectors premium quality to ensure a snug fit into PDU receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

Physical Characteristics

Colors Black

Lengths Available 3ft / 6ft / 8ft / 10ft

Number of Conductors 3 Conductor

Wire Gauge 14 AWG

Jacket Heavy Duty SJT

Jacket Material 100% Virgin PVC - Polyvinyl Chloride

Jacket Fire Rating VW-1

Strain Relief Molded 100% Virgin PVC

Conductor Material 100% bare copper

Temperature Rating -20 deg C to 105 deg C

Connector(s)

Connector A NEMA 5-15P

Connector B Un-terminated - Outer Jacket Removed

Performance

Power Rating 15 Amp / 125 Volt

Approvals / Product Support

5-15P c(UL)us Cable c(UL)us

ISO ISO 9001:2015, ISO 14000

Yes


RoHS, Reach Yes

Country of Origin Vietnam

Warranty Information

Conflict Minerals


Warranty Limited Lifetime

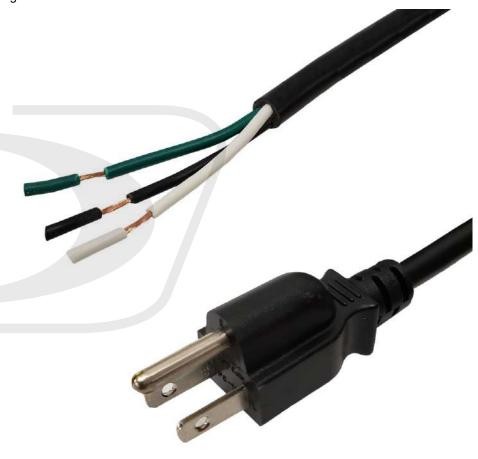




5-15P to ROJ Power Cable - SJT - 14AWG

PWC-RN10C-xx - Line Drawing

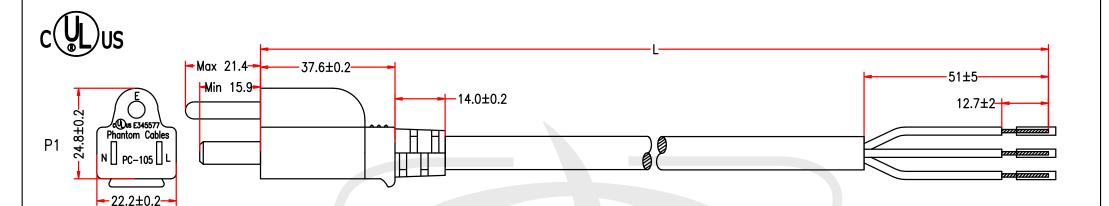



P1: c@us E345577

CABLE MARKING:

Phantom Cables c(UL)us E345578 SJT 3/C 14AWG(2.08mm²) 105°C 300V VW-1

	105BB2F14D(FP044-11)				
	P1	STRIPPED JACKET 51mm			
BLACK WHITE GREEN	L · N · E ·	SEMI-STRIPPED 12.7mm SEMI-STRIPPED 12.7mm SEMI-STRIPPED 12.7mm			

THE CABLE MARKING IS CONCAVE LETTERING MOULD

Cable Length Unless Other Spec.

Tolerances:


0 000	1.40
0 ~200mm	± 10 mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm ↑	±40mm



5-15P to ROJ Power Cable - SJT - 14AWG

PWC-RN10C-xx - Packaging Information

P/N	LENGTH(Lmm)	UPC
PWC-RN10C-03	915mm	675678062379
PWC-RN10C-06	1830mm	675678062386
PWC-RN10C-08	2440mm	675678062393
PWC-RN10C-10	3048mm	675678062409

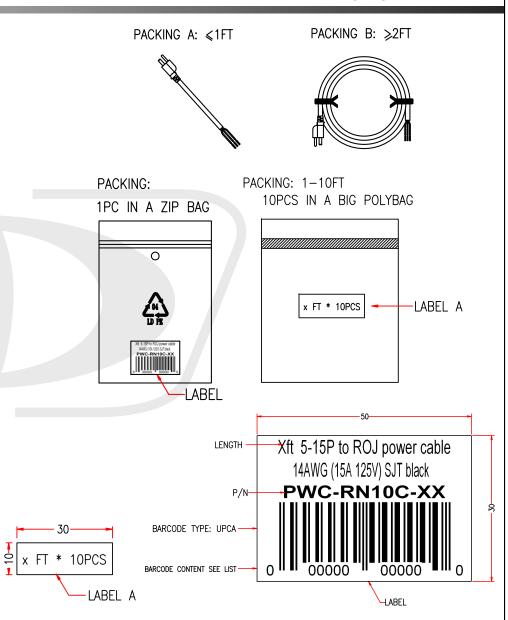

*NOTE: All relevant materials are complied with RoHS directive .