



Dual Locking C19 to C20 Universal Power Cable - SJT - 14AWG H05VV-F 1.5mm

PWDL-125-xxU - Specifications

Description

This power cord consists of a locking C20 male on one end and a locking C19 female on the other end. It is typically used to connect a server to a PDU in a data center environment. The unique dual lockable C19 female and C20 male connectors can be used with any standard IEC inlet and guards against accidental disconnection of computers, PDU's, servers and most network devices

Physical Characteristics

Color	Black
Number of Conductors	3 Conductor
Conductors Color Codes	Earth (Green and Yellow), Neutral (Blue), Live (Brown)
Wire Gauge	14AWG / 1.5 mm ²
Jacket	Heavy Duty SJT / H05VV-F (Universal Approved)
Jacket Fire Rating	VW-1
Strain Relief	Molded PVC
Temperature Rating	105 deg C

Connectors

Connector A	IEC 60320 Locking C19 - c(UL)us
Connector B	IEC 60320 Locking C20 - c(UL)us

Performance

Power Rating	16 Amp / 250 Volt
--------------	-------------------

Approvals

c(UL)us	Yes
SAA	Yes
ENEC	Yes

Environmental

RoHS	Yes
Conflict Minerals	Yes


Packaging Information

Package Quantity	1
------------------	---

Warranty Information

Warranty	Limited Lifetime
----------	------------------



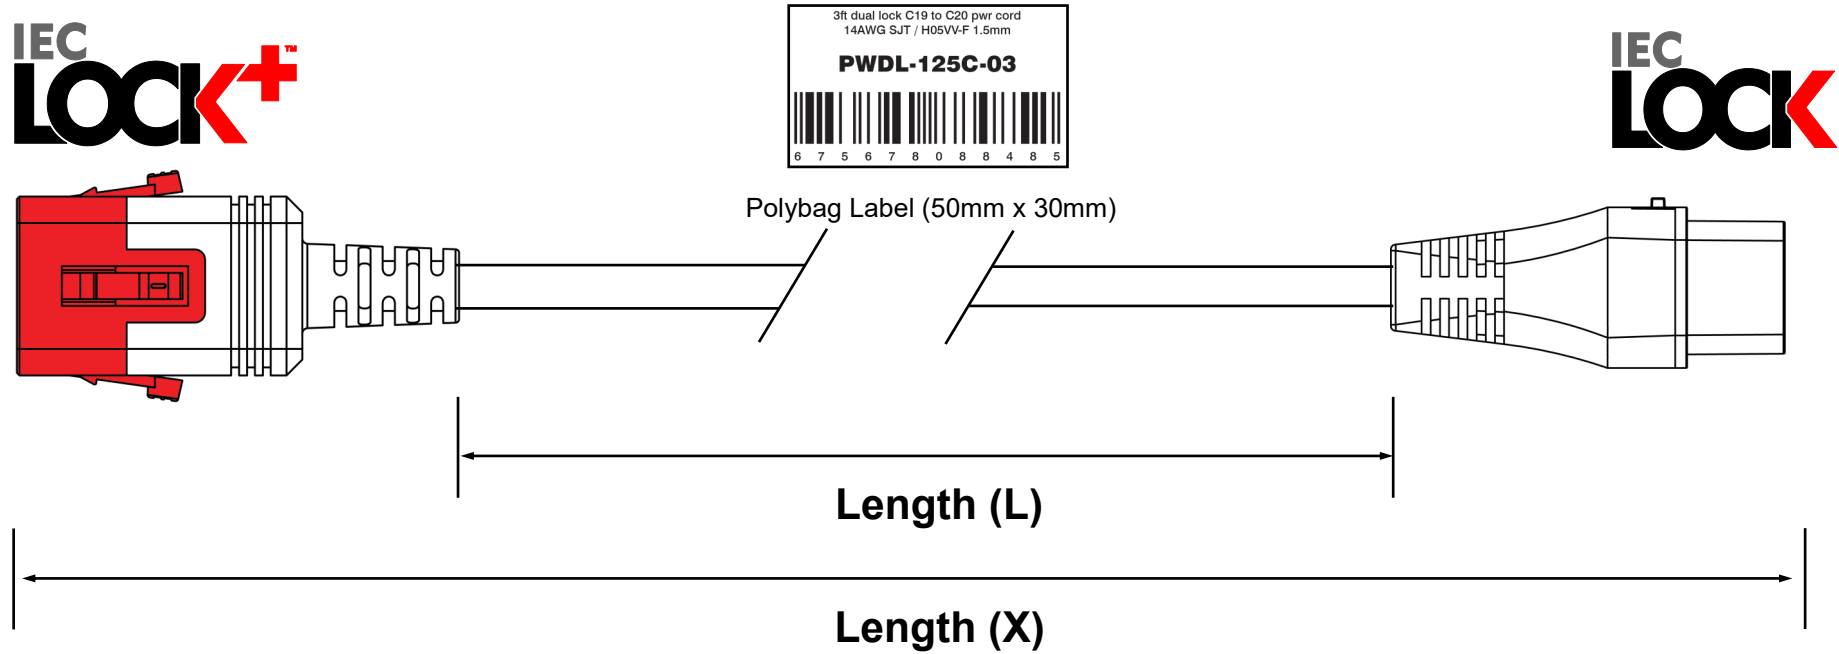

P/N	LENGTH(Lmm)	LENGTH(Xmm)	UPC
PWDL-125-03U	(3 feet) 747mm (+/- 15mm)	(914mm) (+/- 15mm)	675678088485
PWDL-125-06U	(6 feet) 1662mm (+/- 20mm)	(1829mm) (+/- 20mm)	675678088492
PWDL-125-10U	(10 feet) 2881mm (+/- 40mm)	(3048mm) (+/- 40mm)	675678088508

Cable Marking:

I-SHENG KSIS ◁V DE▷ KEMA-KEUR ∞∞+ ∞+ ∞ ◁ÖVE▷ △CEBEC 809 SDNH NF-USE 1353 IEMMEQU H05VV-F 3G 1.5 mm² 300/500V 60227 IEC 53 SAA-190401-EA CIRCULAR ORDINARY (UL) E314513 SJT 105°C 3×14AWG(2.08mm²)300V VW-1 CSA LL81924 TYPE SJT 105°C 3×2.08mm²(14AWG) 300V VW-1 - LF- CE