



DB25 Male to DB25 Female Serial Cable - Straight-Through

SR-111-xxBK - Specifications

Description

This DB25 serial cable consists of a DB25 male on one and a DB25 female on the other. It is commonly used in serial RS-232 data applications.

Physical Characteristics

Number of Conductors	25 Conductors
Wire Gauge	28AWG Stranded
Jacket Material	PVC - Polyvinyl Chloride
Cable Shielding	100% Aluminum Mylar Foil Shield

Connectors

Connector A	DB25 Male (4-40 thumbscrews)
Connector B	DB25 Female (4-40 thumbscrews)

Pin Out

DB25 Male - DB25 Male - DB25 Female
1-1
2-2
3-3
4-4
5-5
6-6
...
24-24
25-25
Shell-Shell

Environmental

RoHS	Yes
------	-----

Packaging Information


Package Quantity	1
------------------	---





DB25 Male to DB25 Female Serial Cable - Straight-Through

SR-111-xxBK - Line Drawing

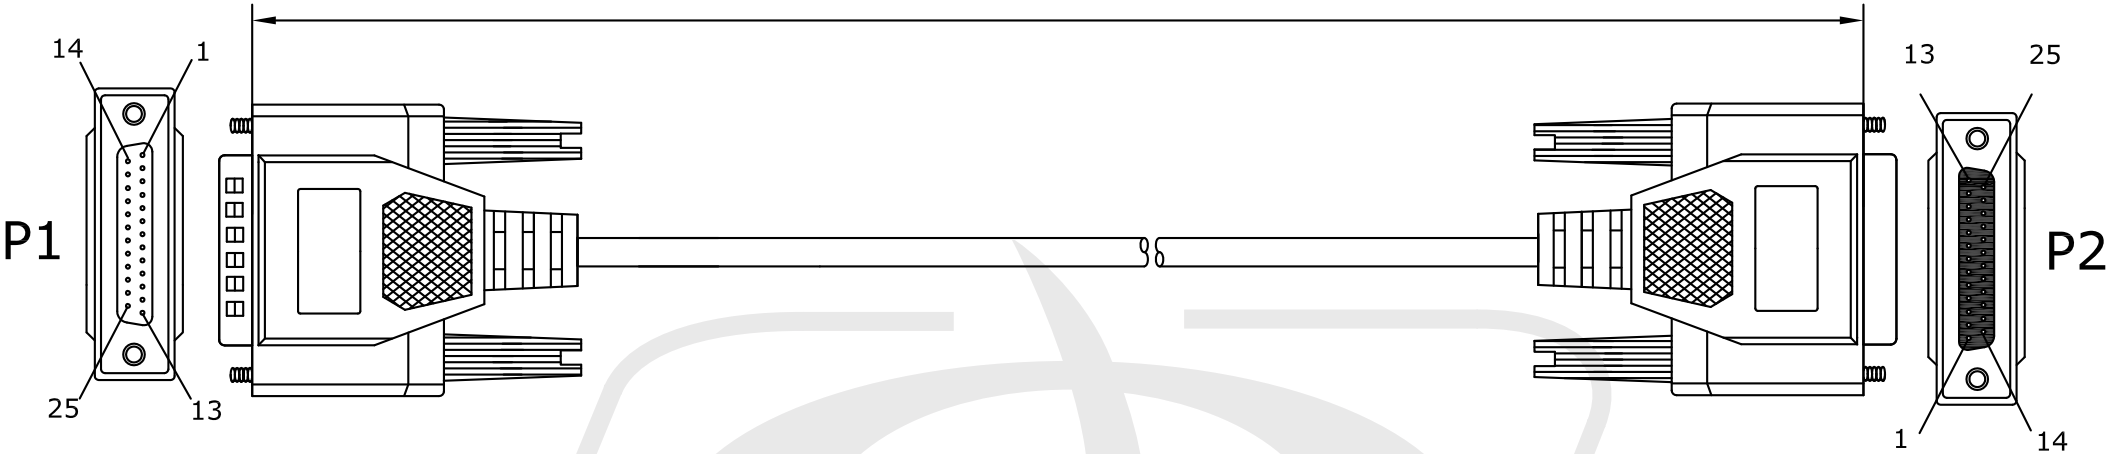

Length(MM)	Length(FT)	P/N :
915±20MM	3FT	SR-111-03BK
1830±30MM	6FT	SR-111-06BK
3050±40MM	10FT	SR-111-10BK
4575±50MM	15FT	SR-111-15BK
7625±50MM	25FT	SR-111-25BK

PIN ASSIGNMENT

P1		P2	P1	P2
1	Black	1	14	Brown/White
2	Brown	2	15	Red/White
3	Red	3	16	Orange/White
4	Orange	4	17	Yellow/White
5	Yellow	5	18	Green/White
6	Green	6	19	Blue/White
7	Blue	7	20	Purple/White
8	Purple	8	21	Brown/White
9	Grey	9	22	Red/Black
10	White	10	23	Orange/Black
11	Pink	11	24	Yellow/Black
12	Light Blue	12	25	Green/Black
13	Black/White	13		
Shell		Drain		Shell

