

TLH-HL1920E - Specifications

Description

This professional heat gun is perfect for heat shrink sleeving, peeling paint, drying plaster work, etc. Applications that require a heat gun with wide temperature range can be completed quickly with nine different temperature pre-sets and three different airflow setting. Heat gun will also be comfortable due to balanced weight design. It also has c(UL)us safety approval and thermal cut off to protect the unit from overheating.

Features


- Thumbwheel temperature setting
- Ergonomic handle with soft inlay
- Changeable power cord
- 3-stage airflow
- Ceramic encapsulated heating element
- Non-slip standing surface
- Higher durability (+20 %)
- Optimized center of gravity
- Thermal cut-out

PROFESSIONAL - ERGONOMIC - SIMPLE

This heat gun is professional, ergonomic and simple to use. Comes with ergonomic optimized center of gravity which provides handle with soft inlay and non-slip standing surface.

QUICK AND EASY OPERATION

This heat gun is a quick and easy way to use for different applications such as defrosting, drying, shaping, shrinking, cable bundling etc.

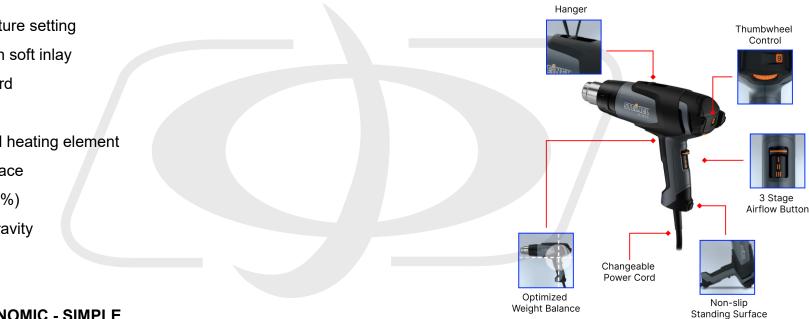



Heat Gun - 3 Stage, 13cfm Max, 1500W

TLH-HL1920E - Specifications

Physical Characteristics			
Color	Black		
Power Cord	Industrial Grade Rubber	ET.	6
Power Cord Length	6ft		
Motor	Brush Motor		
Heating Element	Ceramic		nu 1920 E
Motor lifetime	600h		
Dimensions	9.96" x 3.33" x 7.87" (L x W x H)		
Performance			
Voltage	120 VAC / 60Hz		
Output Voltage	1500 watts		
Amps	12.5A		
Stages	3		
Temperature	50 ~ 600 °C (120 ~ 1100 °F)		
Airflow Rate	4 / 4-8 / 6-13 cfm		
<u>Approvals</u>			
c(UL)us	Yes		
Environmental		Packaging Information	
RoHS	Yes	Packaging Contents	1 - Heat gun
Warranty Information			1 - User Manual
Warranty	1 Year Limited	Product Weight	2.26lbs