



Cisco® Compatible 1000BASE-BX-U BiDi SFP 1310nm/1490nm LC Transceiver - 10km

TR-GLC-BX-U - Specifications

Description


This is a bidirectional Enhanced Small Form-factor Pluggable (SFP) transceiver module with maximum data transfer rate of 1.25 Gbps up to 10km over a simplex singlemode fiber cable. It is used in network devices with an SFP slots. The transceivers are Multi-Source Agreement (MSA) compliant and built to OEM specifications.

Features:

- Dual data-rate of 1.25Gbps/1.063Gbps operation
- Two types :
 - A:1310nm FP Laser transmitter,1490nm PIN receiver
 - B:1490nm DFB Laser transmitter,1310nm PIN receiver
- Compliant with SFP MSA and SFF-8472 with simplex LC receptacle
- Digital Diagnostic Monitoring: Internal Calibration or External Calibration
- Compatible with RoHS
- Compatible with SONET OC-24-LR-1
- +3.3V single power supply

Applications:

- Gigabit Ethernet
- Fiber Channel
- Switch to Switch interface
- Switched backplane applications
- Router/Server interface
- Other optical transmission systems

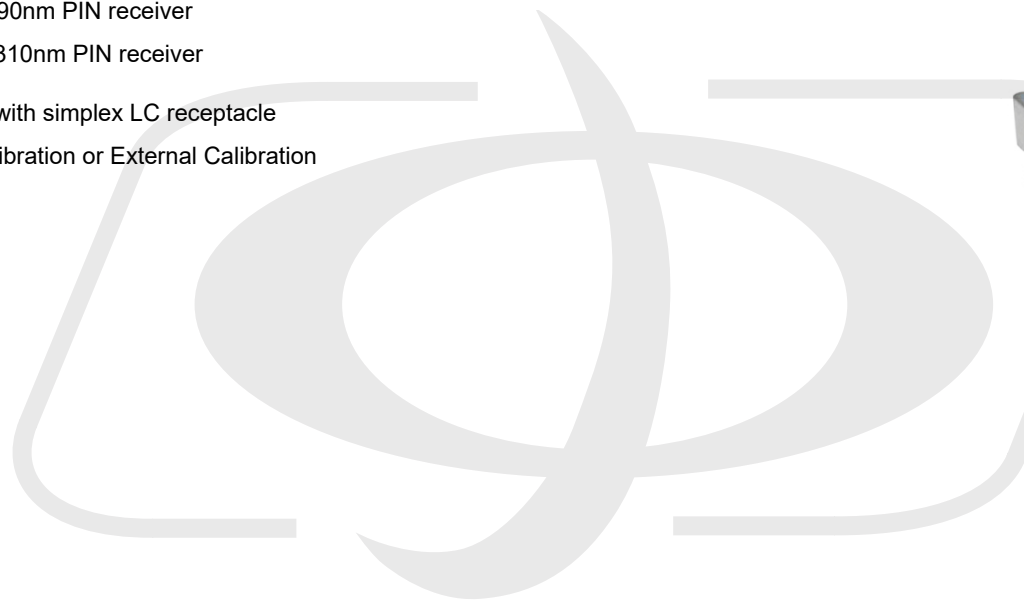

Physical Characteristics

Dimensions	57mm x 15mm x 9mm (L x W x H)
Operating Temperature	0°C ~ 70°C
Storage Temperature	-40°C ~ 85°C
Laser Type	Class 1

Connectors

Connector	LC Simplex
-----------	------------

Certifications

CE/FCC/RoHS	Yes
-------------	-----

Performance

Media Supported	1000BASE-BX-U Singlemode Fiber	
Maximum Transmission Distance	10km	
Wave Length	TX: 1310nm	RX: 1490nm
DDM Support	Yes	

Packaging Information

Package Quantity	1
Product Weight	0.02 lbs [0.01kg]

Warranty Information

Warranty	Limited Lifetime
----------	------------------



Cisco® Compatible 1000BASE-BX-U BiDi SFP 1310nm/1490nm LC Transceiver - 10km

TR-GLC-BX-U - Line Drawing

