



USB 2.0 A Straight Male to A Right/Left Angle Male Cable - Black

USB-221-xx- Specifications

Description

This USB 2.0 cable consists of a USB straight A male on one end and a USB A right angle or left angle A male on the other end. The angled end uses a reversible USB A male connector which allows it to be inserted in either a right angle or left angle exit. It is typically used to connect a USB peripheral to your computer such as a USB hub to a PC.

Physical Characteristics

Color	Black
Connector Plating	Nickel Plated
Contact Plating	Gold Plated
Cable Diameter	3.5 mm
Jacket Material	PVC - Polyvinyl Chloride
Cable Shielding	100% Foil
Strain Relief	Molded PVC
Temperature Rating	80 deg C
Cable Voltage Rating	30V

Connectors

Connector A	USB 2.0 Type A Straight Male
Connector B	USB 2.0 Type A Right/Left Male

Performance

Rating	USB 2.0 Hi-Speed Compliant Cable
Speed	480 Mbps
Compatibility	Backwards Compatible with 1.0

Approvals

UL	Yes - Cable
cUL	Yes - Cable

Packaging Information

Package Quantity	1
------------------	---

Environmental


RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

Packaging Information

Package Quantity	1
------------------	---

Cable Weights


1ft	3ft	6ft	10ft	15ft
0.04 lbs	0.12 lbs	0.24 lbs	0.40 lbs	0.60 lbs

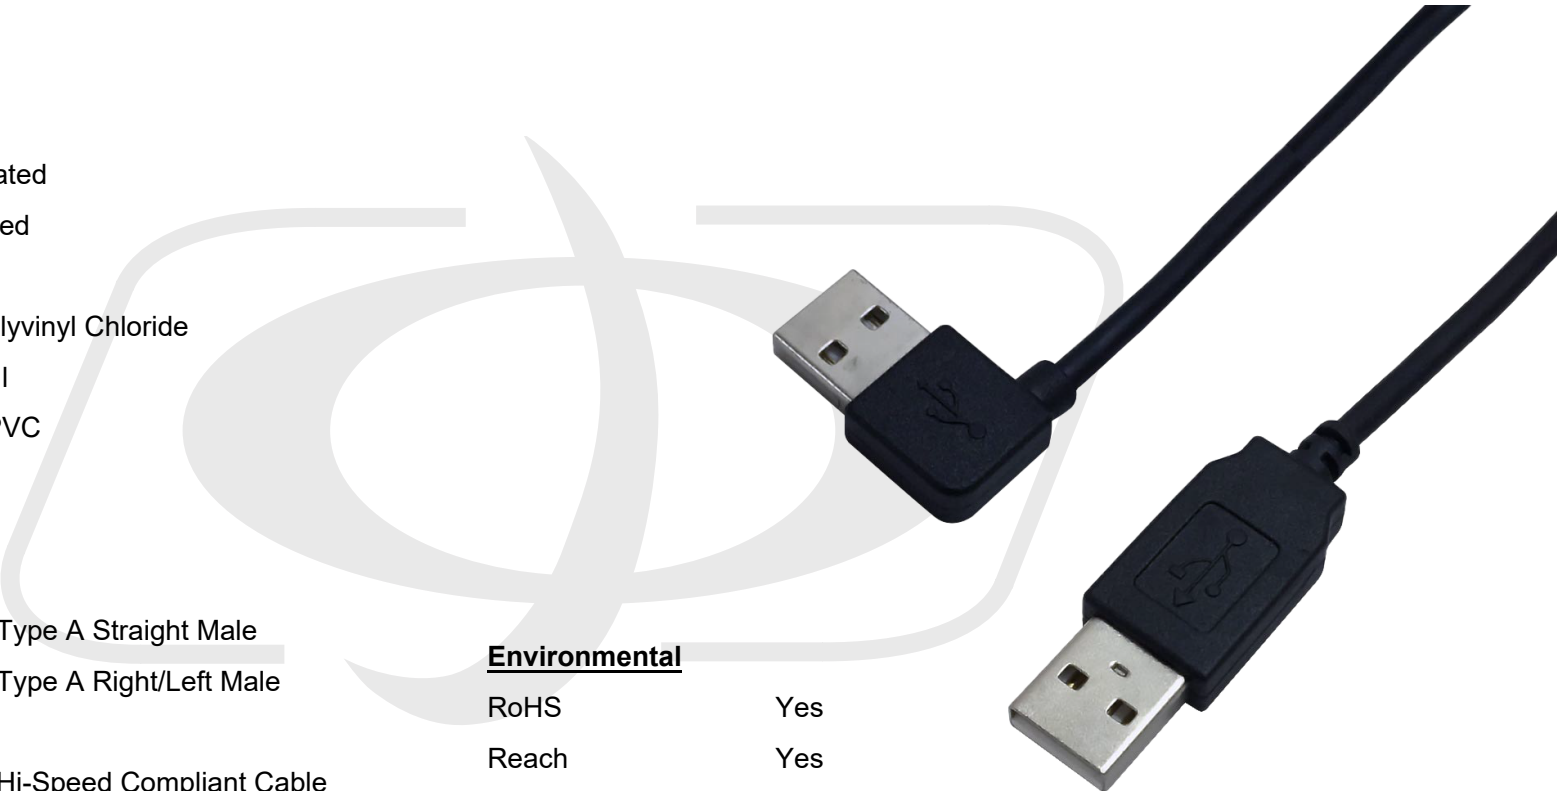



USB 2.0 A Straight Male to A Right/Left Angle Male Cable - Black

USB-221-xx Specifications

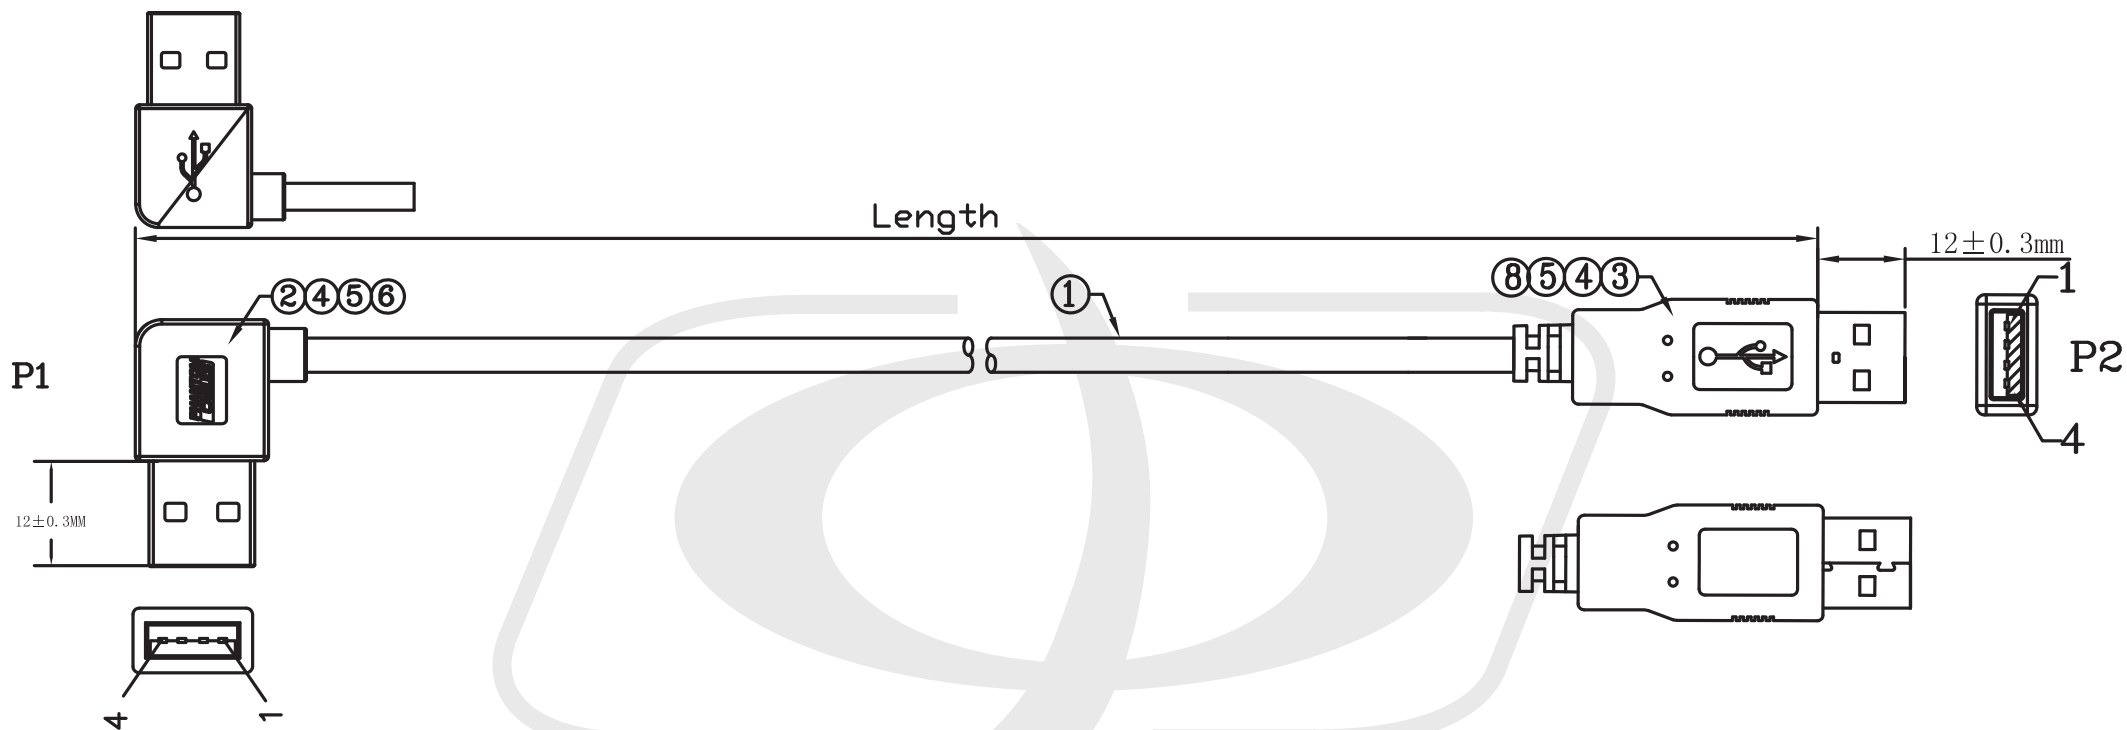

ELECTRICAL TEST:

- 1.100% OPEN SHORT SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:3 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

P/N

USB-221-01

USB-221-03

USB-221-06

USB-221-10

Length

305±10MM

915±30MM

1830±10MM

3050±40MM

Pin Assignment

Conn.1

1 red
2 white
3 green
4 black

Shell

Conn.2

1

2

3

4

Shell