



# USB 2.0 Type-C Male to B Male Cable 480Mbps 3A - Black

## USB-330-xx - Specifications

### Description

This USB 2.0 cable consists of a USB type-C male on one end and a USB B male on the other end. It is capable of transferring data at 480Mbps and is typically used to connect USB 2.0 peripherals as well as charge and sync USB Type-C mobile devices. USB 2.0 is backwards compatible with previous generation USB devices and is also compatible with Thunderbolt™ 3 ports.

### Physical Characteristics

Color	Black
Connector Plating	Nickel Plated
Contact Plating	Gold Plated
Material	PVC - Polyvinyl Chloride
Strain Relief	Molded

### Connectors

Connector A	USB 2.0 Type-B Male
Connector B	USB 2.0 Type-B Male

### Performance

Rating	USB 2.0
Speed	480Mbps
Compatibility	Backwards Compatible Previous Generation USB
Power	3 Amp
Support	DisplayPort, 4-Channel Audio, Thunderbolt™3, PCI Express

### Environmental

RoHS	Yes
------	-----

### Packaging Information

Package Quantity	1
------------------	---

### Warranty Information


Warranty	Limited Lifetime
----------	------------------

### Cable Weights

	<b>1.5ft</b>	<b>3ft</b>	<b>6ft</b>	<b>10ft</b>
	0.03 lbs	0.06 lbs	0.12 lbs	0.13 lbs



USB-330-01.5 :	457.5 ± 20mm
USB-330-03:	915 ± 30mm
USB-330-06:	1830 ± 30mm
USB-330-10:	3050 ± 40mm

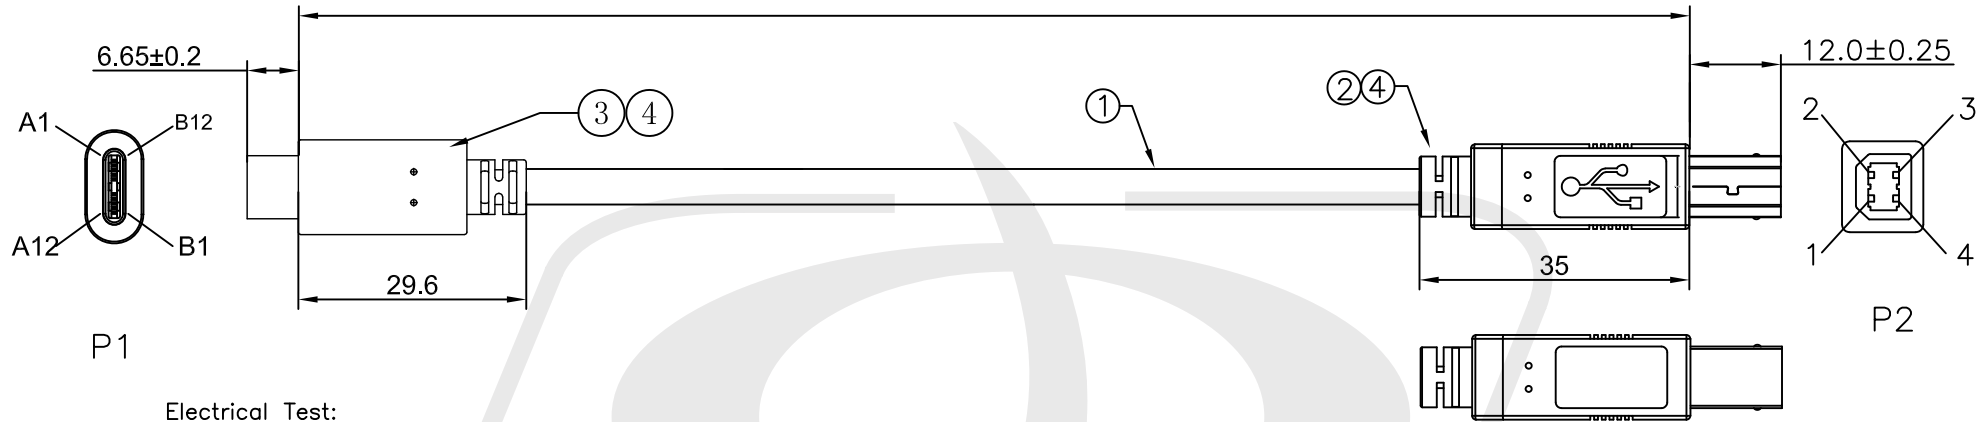

**Electrical Test:**

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm(max).
3. Insulation Resistance: DC 300V/10ms,10M ohm(MIN)

NO.	DESCRIPTION	Q' TY	UNIT
4	PVC~45P~BLACK	VR	G
3	USB2.0 CM CONNECTOR~NI PLATED~PCB+SMT	1	PCS
2	USB2.0 BM CONNECTOR~NI PLATED	1	PCS
1	USB2.0~30AWG*2C+24AWG*1C+EAEB~OD:3.5MM~BLACK~PVC	USB-330-01.5	0.47
	USB2.0~30AWG*2C+24AWG*1C+EAEB~OD:3.5MM~BLACK~PVC	USB-330-03	0.92
	USB2.0~30AWG*2C+22AWG*1C+2EAB~OD:3.8MM~BLACK~PVC	USB-330-06	1.83
	USB2.0~28AWG*2C+23AWG*2C+2EAB~OD:4.0MM~BLACK~PVC	USB-330-10	3.05

**Pin Assignment**

