


8760 Series Damper

- Sportscar
- Open Wheel

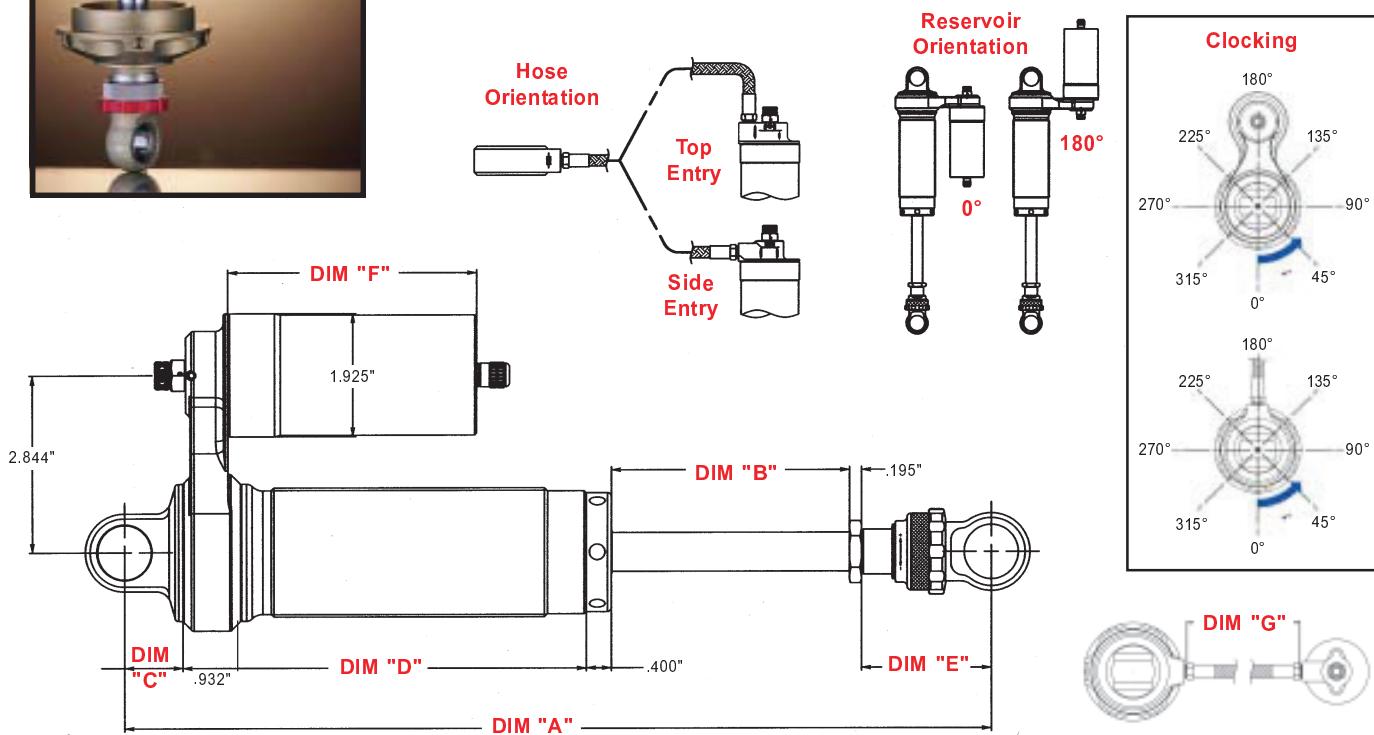

STANDARD LENGTHS

DIM "A" Open Length	DIM "B" Stroke	DIM "C" Body Cap Length	DIM "D" Body Length	DIM "E" Eyelet Length	(.195+.400+.932)
10.0"	1.850"	0.955"	3.565"	2.100"	1.527"
10.5"	2.100"	0.955"	3.815"	2.100"	1.527"
11.0"	2.350"	0.955"	4.065"	2.100"	1.527"
11.5"	2.600"	0.955"	4.315"	2.100"	1.527"
12.0"	2.850"	0.955"	4.565"	2.100"	1.527"
12.5"	3.100"	0.955"	4.815"	2.100"	1.527"
13.0"	3.350"	0.955"	5.065"	2.100"	1.527"
13.5" *	3.600"	0.955"	5.315"	2.100"	1.527"
14.0"	6.850"	0.955"	5.565"	2.100"	1.527"
14.5"	4.100"	0.955"	5.815"	2.100"	1.527"
15.0"	4.350"	0.955"	6.065"	2.100"	1.527"
15.5"	4.600"	0.955"	6.315"	2.100"	1.527"
16.0"	4.850"	0.955"	6.565"	2.100"	1.527"
18.0"	5.850"	0.955"	7.565"	2.100"	1.527"
20.0"	6.850"	0.955"	8.565"	2.100"	1.527"
22.0"	7.850"	0.955"	9.565"	2.100"	1.527"
24.0"	8.850"	0.955"	10.565"	2.100"	1.527"

OPTIONS

DIM "C"	Body Cap
.955"	(STD)
1.205"	(+.250)
1.455"	(+.500)
1.955"	(+1.000)
DIM "E"	Eyelet
2.100"	(STD)
2.300"	(+.200)
2.600"	(+.500)
DIM "F"	Reservoir Body
4.0", 5.0" or 6.0"	
DIM "G"	Hose
4" Through 36"	

* 13.5" (DIM "D") maximum
for 2.00" I.D. Spring