
MiSTER-T2 pro

- Bulk Loading (More Than 20~30 T-shirts at a Time)
- Open Layout System with the Same Top Lid of Mister-T2
- · Step Pedal Trigger
- · Auto Adjustable Platen Height
- Barcode Scanning Capability (Optional add-on)
- · Auto Start wiith Barcode Reader
- Dual Nozzle System
- · Freely Adjustable Nozzle Angle
- · Adjustable Spray Length & Amount
- Multi-inlet Selector Valves (4 Liquid Connectable)
- Ventilation System (Ring Blower is required Separately)
- Pre-Scann ing of Spray Area
- Smart Auto Nozzle Cleaning and Flushing Program
- Preset (Retrieve Frequent Spraying Options)
- Rust Free Structures and Parts
- Real Time Cost Calculation of Liquid for Each Spraying
- · 12 Months Warranty

FOR BULK LOADING

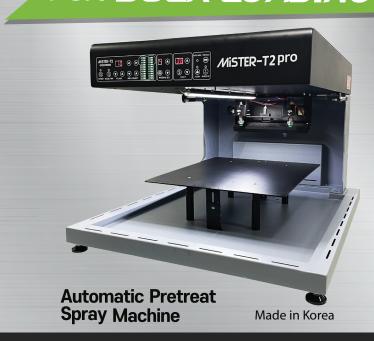

, IDEAL with CONVEYOR DRYER!! Upto shirts/hour

* Bi-direction, 26ml, 16"x20" (40cm x 50cm) coverage, Auto Start Mode

CUS TOMER ORIENTED FE

ATURE S



Bulk Loading



Adjustable Spray Angle



Auto Adjustable Platen Height

- Spring-applied platen to consistent height between nozzle & T-shirts



Easy Control Panel

- Bi-or Uni-directional spray
- Preset options
- Real time cost calculation
- Preview the spray area by laser



Multi-Inlet Selector Valves on t he Sid e

Easy to switch Pretreatme nt liqui ds by opening or closing the valve.




Nozzle Capping Stati on

- Protecting the nozzle from dryi ng or clogging
- Automatic n ozzle cleaning by purging the cleaning water for seconds every few hours



SPECIFI CATION S

Dimens ions	640 mm (W) x 900 mm (L) x 530 mm(H)
Weight	36 kgs
Plat en Size	40 cm x 50cm (16 " x 20")
Number of Sp ray Nozzle	Two Nozzle s
Maximum Sp ray Area	40 cm x 50 cm (16 " x 20")
Spray Cycle Time	3 sec ~ 12 sec
Power Supply	Free Voltage (100V~240V50/60hz)
Power Consumption	60 W
Packing Size	67 0mm (W) x 935 mm (L) x 840 mm(H)
Packing Weight	46 Kgs
Liquid Cons umtion	With Minimum Speed: about 85ml With Maximum Speed: about 12ml



Freely Sel ect the Spraying Area



Step Pedal Trigger



Open Top Lid & LED



Rust Free Structures

All Aluminum and Stainless Steel



Exhaust

Intake Vents

- Ring Blower is required Separately



Barcode Scanning (Option)





