




**FIREBIRD**  
DIGITAL INKS

# FBX-VIVID™ Instruction Guide

- For the approximate pretreatment usage view the chart on the right.
- It's recommended to heat-press the pretreated area for 20 to 30 seconds or until dry at a temperature of 320°F to 340°F with a light to medium pressure.
- Use your DTG printers recommended ink cure settings when printing.
- Standard Daily Pretreatment Machine Maintenance Required.

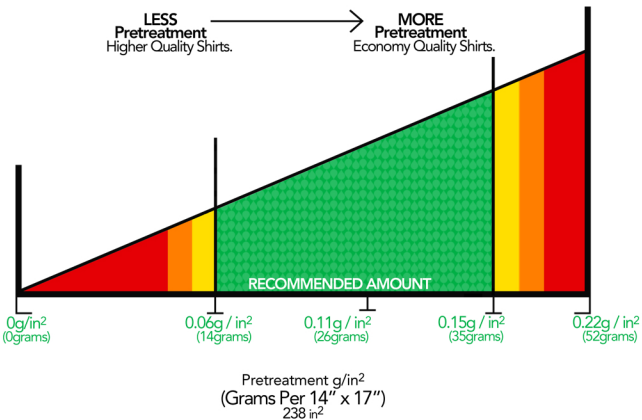

VISIT US ONLINE FOR MORE INFORMATION  
[WWW.FIREBIRDINK.COM](http://WWW.FIREBIRDINK.COM)