



INFRARED FLASH CURE F-SERIES

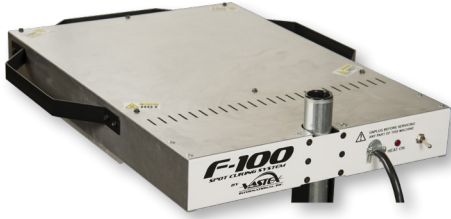

F-100
16" x 16" Heater
On/off power switch
Includes levelers

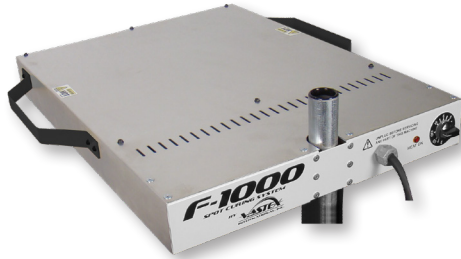

F-1000
18" x 18" Heater
Heat control
Includes wheels

High wattage and close coil density heater, for greater heater surface consistency.

Powerful heaters along with our built in heat shields allows Vastex flashes to be set closer to your garment, which increases efficiency and productivity.

**15 YEAR
HEATER WARRANTY**



F-1000
Shown with standard stand

CE CERTIFIED
BY CERTIFICATION EXPERTS
THE NETHERLANDS

| | F-100 | F-1000 |
|------------------------|------------------------|--------------------------------|
| Heater Size | 16" x 16" (41 x 41 cm) | 18" x 18" (46 x 46 cm) |
| Power (Wattage) | 1,625w @ 120v or 240v | 1,950w @ 120v or 2,600w @ 240v |
| Power Plug | NEMA 5-15P or 6-15P | NEMA 5-20P or 6-15P |

F-100

- 15 Year Heater Warranty
- 1,625 Watt IR Heater
- On/off power switch
- Heavy duty side handles
- Head leveler to adjust the heater parallel to the pallet
- Heat shields for even heater temperature

Features

F-1000

- 15 Year Heater Warranty
- 1,950 or 2,600 Watt IR Heater
- Heat control with power lights
- Heavy duty side handles and locking wheels
- Head leveler to adjust the heater parallel to the pallet
- Heat shields for even heater temperature


Options

- Super Heavy Duty Stand
- AutoFlash
- Rotary Table
- Wheel Set (F-100 only)

** Domestic plugs listed. International cords available.



INFRARED FLASH CURE ACCESSORIES

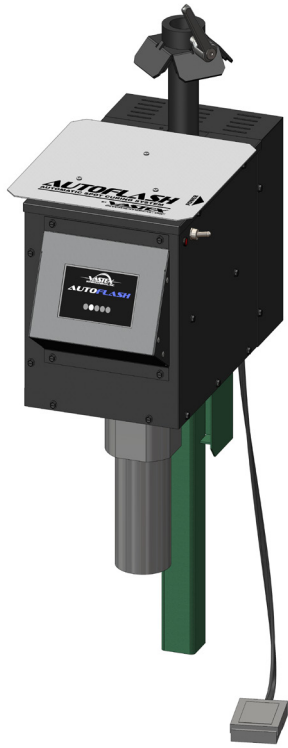


AUTOFLASH

FEATURES

- Touch Screen Display
- Selectable clockwise or counterclockwise rotation
- Smooth start and stop with eccentric arm drive
- 0 to 99 second adjustable dwell timer
- Foot pedal actuator on 7 foot cord

RedFlash shown with AutoFlash
and SHHD Stand

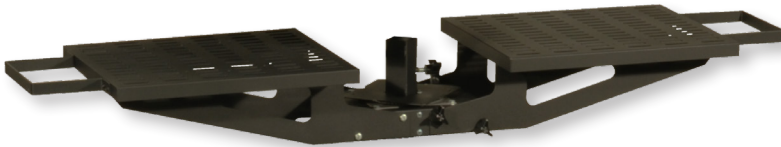

ROTARY TABLE

FEATURES

- Easily mounts to standard and SHHD stands
- Rotates under flash head to cure shirts
- Two sizes available for use with 18" sq and 18" x 24" flash

F-100 shown with Rotary Table



SHHD-STAND

FEATURES











- Super heavy duty stand to hold added weight
- Ideal for use with AutoFlash or heavier AirFlash
- Offset legs allow for stand to fit mostly under press



Flash Cure Units

Technical Specifications

| | | | | | | |
|---|--|---|--|------------------------------------|------------------------------|---|
| CE | F-100 | F-1000 | REDFLASH | | AIR-FLASH | |
| Models | F-100 | F-1000 | RD-18-240 | RD-1824-240 | RAD-18 | RAD-1824 |
| Heater Warranty | 15 Year | 15 Year | 15 Year | 15 Year | 15 Year | 15 Year |
| Bumper to Bumper Warranty | 3 Year | 3 Year | 3 Year | 3 Year | 3 Year | 3 Year |
| Heater Size | 16" x 16" (41 x 41 cm) | 18" x 18" (46 x 46 cm) | 18" x 18" (46 x 46 cm) | 18" x 24" (46 x 61 cm) | 18" x 18" (46 x 46 cm) | 18" x 24" (46 x 61 cm) |
| Controls | On/Off Switch | Bi-Metal control w/ adjustment knob | Digital percentage timer | Digital percentage timer | Digital percentage timer | Digital percentage timer |
| Unit Warm Up Time | 15 min. (120V) or 10 min. (240V) | 20 min. (120V) or 10 min (240V) | 6 min. | 12 min. | 6-10 min | 6-10 min |
| Heater Wattage | 1625 Watt Heater | 1950 (120V) or 2600 (240V) Watt Heater | 2600 or 3500 Watt Heater | 3500 Watt Heater | 3500 Watt Heater | 4300 Watt Heater |
| Electrical Specs* / included plug (Some models require a dedicated line. 50/60 HZ for all units.) | 120V/13A/1625W NEMA 5-15P 240V/6.5A/1625W NEMA 6-15-P | 120V/15.6/1950W NEMA 5-20P 240V/11/2600W NEMA 6-15-P | 240V/11A/2600W NEMA 6-15P 240V/16A/3500W NEMA 6-20P | 240V/16A/3500W/ NEMA 6-20P Plug | 240V/16A/3500W NEMA 6-20P | 240V/22A/4300W/ NEMA 6-30LP (plug optional) |
| Electrical Specs - AutoFlash / included plug | 110-125V/1A/NEMA 5-15P 220-240V/1A/NEMA 6-15P | | | | | |

| NORTH AMERICAN POWER PLUG CONFIGURATION | |
|---|---|
| RECEPTACLE | PLUG |
|  |  |
| NEMA 5-15R | NEMA 5-15P |
|  |  |
| NEMA 5-20R | NEMA 5-20P |
|  |  |
| NEMA 6-15R | NEMA 6-15P |
|  |  |
| NEMA 6-20R | NEMA 6-20P |
|  |  |
| NEMA L6-30R | NEMA L6-30P |

Shipping Weights and Dimensions

| | Weight** | Dimensions** |
|---|------------------|------------------------------------|
| F-100 (Head and Stand) | 39 lbs (18 kg) | 23" x 28" x 9" (58 x 71 x 22.9 cm) |
| F-1000 (Head and Stand) | 42 lbs (19 kg) | 23" x 28" x 9" (58 x 71 x 22.9 cm) |
| RD-18-240 (Head Only) | 35 lbs (16 kg) | 26" x 29" x 7" (66 x 74 x 18 cm) |
| RD-1824-240 (Head Only) | 43 lbs (19.5 kg) | 26" x 35" x 8" (66 x 90 x 20 cm) |
| RAD-18-HO (Head Only) | 64 lbs (29 kg) | 29" x 26" x 15" (74 x 66 x 38 cm) |
| RAD-1824 (Head Only) | 74 lbs (35.5 kg) | 35" x 29" x 15" (89 x 74 x 38 cm) |
| AF-120/AF-240 AutoFlash kit | 51 lbs (25 kg) | 31" x 22" x 14" (79 x 56 x 36 cm) |
| SH-STAND-WS Standard Stand for Manual Flash | 22 lbs (10 kg) | 37" x 7" x 3" (94 x 18 x 8 cm) |
| SHHD-STAND-M Heavy Duty Stand for Manual Flash | 42 lbs (19kg) | 30" x 14" x 7" (76 x 35.5 x 18 cm) |
| SH-LEGS-AF Standard Stand for AutoFlash | 15 lbs (7 kg) | 37" x 7" x 3" (94 x 18 x 8 cm) |
| SHHD-STAND Heavy Duty Stand for AutoFlash | 39 lbs (18 kg) | 30" x 15" x 11" (76 x 38 x 28 cm) |

*If extension cord is required, consult a licensed electrician.

**All shipping weights and dimensions are for continental US shipping only. Call for other shipping specifications.

1 in = 2.54 cm
1 lb = 0.454 kg

