

### GoSure 3001 Your personal road safety guardian



- Collision detecting G-sensing
   G-sensor detects collisions, triggering emergency mode to better secure your video evidence
- Driver fatigue alert for a safer drive
   To remind driver to get sufficient rest, GoSure 3001
   periodically alert the driver with a voice message.
- Reliable high-quality image
- Full-HD 1080p sharp image to capture major road events
- 132° angle coverage, recording up to 3 lanes of traffic
- Image sensor quality and F/2.0 lens for better night view
- Hassle-free and fully automated operation
- Wireless connectivity via APP
- Automatically starts recording when activating the engine





# **Collision detecting G-sensing**



#### G-sensor detects collisions, triggering emergency mode

Equipped with a 3-axis G-sensor module, the Philips GoSure 3001 detects movement and triggers an emergency mode. During a collision that exceeds a certain force threshold, the device will lock that videos in specified folder to better secure the evidence.





### Driver fatigue alert for a safer drive



#### **Automatic driver fatigue alert warning**

Drivers who are tired and unaware often find themselves in dangerous situations on the road. In EU Fatigue report 2018, a study demonstrates that, when driving 2-4 hours, a rest break will help restore driver's attention and operating performance.

The Philips GoSure 3001 features an effective Advanced Driver Assistance System (ADAS) as it has an algorithm that calculates the hours spent driving. When the fatigue index gets too high and the driver should be taking a rest, the device will alert the driver with a voice warning message.





### Reliable high-quality image



#### Full-HD 1080p sharp image to capture major road events

With its full HD 1080p video capabilities, the Philips GoSure 3001 captures sharp and vivid details on the road. You'll get clear images of the actions of other drivers, including the ability to capture license plate numbers.





### Reliable high-quality image



#### 132° angle coverage, recording up to 3 lanes of traffic

Capture more of the scene ahead with a proven 132° super wide angle lens for the camera. Philips GoSure 3001 is able to cover to three lanes of traffic, helping you gain a more complete picture of any incident on the road.





# Reliable high-quality image



#### F/2.0 lens for better night view

The Philips GoSure 3001 is equipped with a highly sensitive image sensor and bright F/2.0 lens. This helps you capture a sharp, high-quality image of your journey, even when driving at night or in other low-light conditions.





# Hassle-free and fully automated operation



#### Wireless connectivity for easy operation

With the built-in 2.4GHz Wi-Fi, you can enjoy a comfortable live streaming of videos on your smartphone by connecting to third party APP. With wireless connectivity, it allows smart control and easy operation.





# Hassle-free and fully automated operation



#### Automatically starts recording when activating the engine

When using the car, your first action is turning on the engine. Philips GoSure 3001 always starts working automatically when the engine is turned on. The device also switches off automatically when the engine is off. You could drive away with peace of mind, knowing that your GoSure 3001 works immediately and captures your entire journey in vivid detail.



#### GoSure 3001

#### Designed to perform under tough driving conditions


Built from high quality components, the Philips GoSure 3001 dashcam is designed to perform under tough driving conditions. Rigorously tested, it operates in extreme temperatures (from -10°C up to 60°C), and can handle the constant vibrations of a moving vehicle.

The Philips GoSure 3001 is compliant with BIS.






### GoSure 3001 Easy installation in car



Tear off the film from the detachable adhesive base and fix the device in the proper installation location

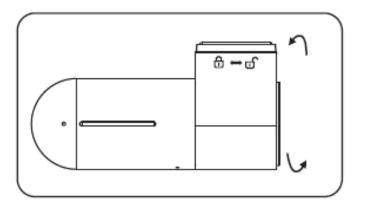

Rotate the cylinder part of the device to adjust the camera angle, and tilt the lens slightly downward so that the camera view is parallel to the horizontal ground.

Recommended: The ground/sky ratio is approximately 6:4.



### GoSure 3001 Product specification





|                       | Collision detection & emergency file protection   |  |  |  |  |
|-----------------------|---|--|--|--|--|
|                       | Fatigue index & fatigue reminder                  |  |  |  |  |
| functions             | High quality image 1080P                          |  |  |  |  |
|                       | Wireless connection via APP                       |  |  |  |  |
|                       | Seamless loop recording                           |  |  |  |  |
|                       | Automatic recording                               |  |  |  |  |
| Image Sensor          | GC2053+NT96672M                                   |  |  |  |  |
| Video resolution      | 1920*1080p @30fps,                                |  |  |  |  |
|                       | 1280*720p@30fps                                   |  |  |  |  |
| Aperture Range        | F 2.0   |  |  |  |  |
| Fixed Lens            | 132° super wide angle                             |  |  |  |  |
| File Format           | .MP4  |  |  |  |  |
| Recording media       | Micro SD card (class 10 or higher,up to 64G)      |  |  |  |  |
| December Time         | (2.95 hours @1080p)16G                            |  |  |  |  |
| Recording Time        | (6 hours@720p)16G                                 |  |  |  |  |
| RTC                   | 5days   |  |  |  |  |
| Operating Temperature | -10°C ~ 60°C                                      |  |  |  |  |
| Storage Temperature   | -20°C ~ 70°C                                      |  |  |  |  |
| Accessories           | 3.6m power cable, UM                              |  |  |  |  |
| Interface             | Micro USB 2.0, micro SD Slot, Microphone, Speaker |  |  |  |  |
| Languages             | English,  |  |  |  |  |
| Power                 | 5V, Micro USB cable                               |  |  |  |  |
| Dimensions (LxWxH)    | 98mm*43mm*30mm                                    |  |  |  |  |



### GoSure 3001 Logistic and Package



| New 12NC       | Description  |    | Packing Config | EAN1          | EAN3          | GOC          | Type<br>Number |
|----------------|--------------|----|----------------|---------------|---------------|--------------|----------------|
| 9285.999.37801 | GS3001 GS300 | X1 | 10             | 6974260729176 | 6974260729268 | 72917<br>630 | GS300          |



